

Registered by Australia Post — publication No. NBP0240.

AUSTRALIA'S NUMBER ONE ELECTRONICS MAGAZINE

# ELECTRONICS

AUSTRALIA

MAY 1984  
AUST \$2.30 NZ \$2.75

STOP THIS▶

*Build  
our new* **Car  
Burglar  
Alarm**

**Shure V15  
Type V  
Cartridge**

**Programmable  
light controller**


**CAT Computer  
Reviewed:  
colour graphics  
plus  
sound effects**





# FOR QUALITY, PERFORMANCE & VALUE, AARON MUST BE YOUR FIRST 'SCOPE CHOICE

(and for after sales service too!)

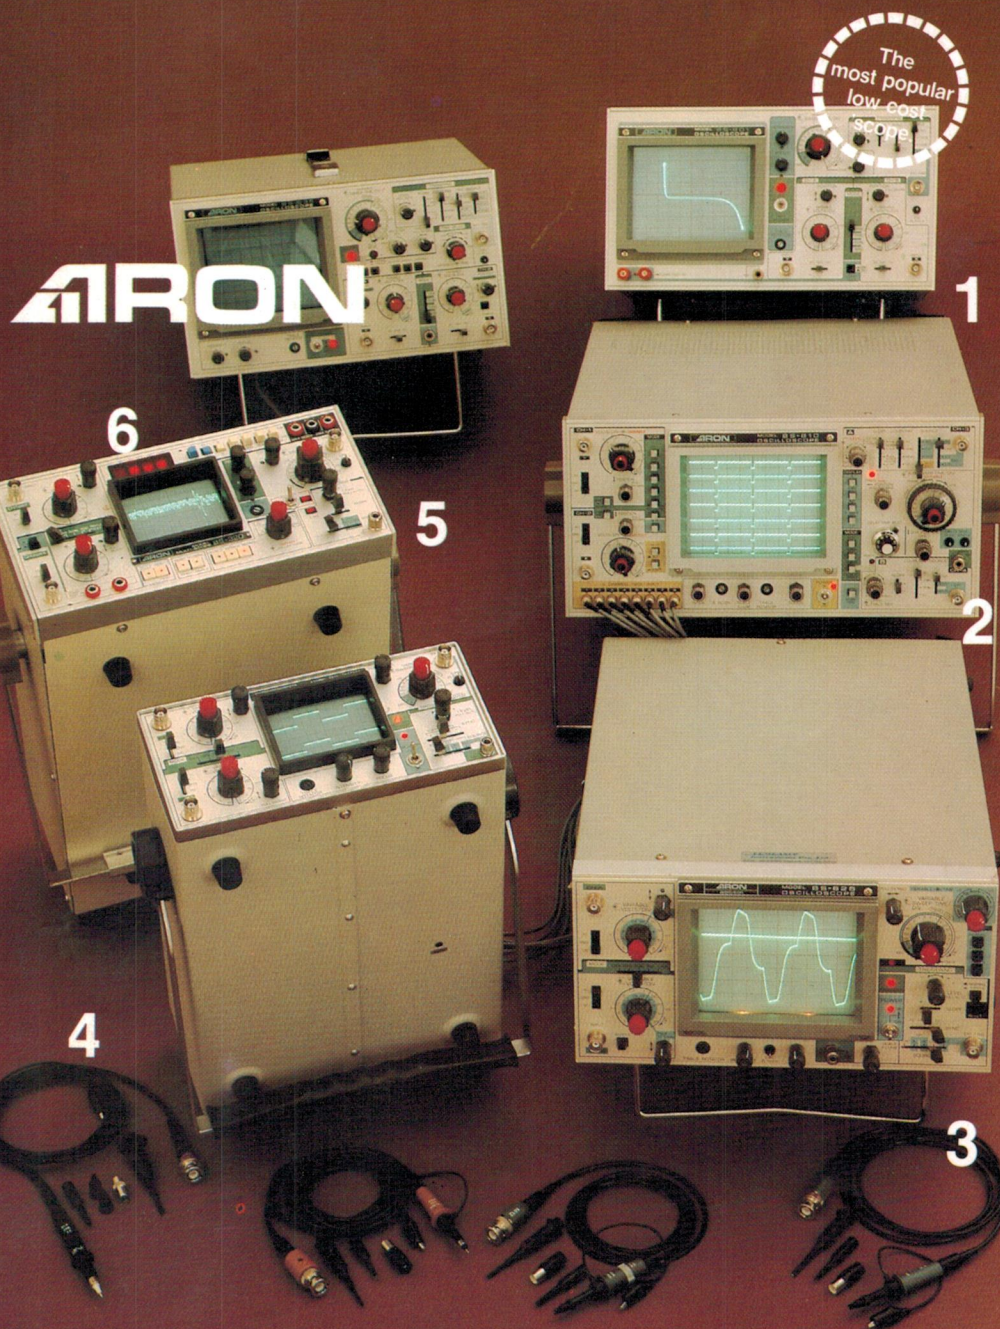

## 1 BS601 - 20MHz/5mV with Built-in Component Tester

**\$535** ex tax  
\$620.20 tax paid

- Check components on screen
- 19 range timebase • Triggers to over 30MHz • 17nS risetime

## 2 BS810 - 100MHz/1mV with 4 Channels and 8 Traces

**\$2295** ex tax  
\$2708.10 tax paid

- 2nS/div max sweep time
- Alternate time base with B ends A mode • Variable trigger hold-off
- Independent position controls
- Signal delay

## 3 BS625 - 45MHz/1mV with Signal and Timebase Delay

**\$1095** ex tax  
\$1270.20 tax paid

- Single sweep • Trigger delay
- 7.7nS risetime • X, Y, Dual, Chop, Add, Subtract etc

## 4 BS310S - 15MHz/2mV Battery Portable

**\$795** ex tax  
\$922.20 tax paid

- Ideal for field service use
- 2 hour operation from built-in NiCads • Automatic re-charging
- Auto trigger free run • TV sync

## 5 BS320 - 15MHz/2mV with Digital Storage and DMM

**\$2295** ex tax  
\$2708.10 tax paid

- Built-in 3½ digit multimeter
- Digital storage mode • Trigger delay • X-Y mode component tester • 3 channel operation for 3-phase measurements

## 6 BS635 - 35MHz/1mV with Alternate and Delayed Timebase

**\$875** ex tax  
\$1015.00 tax paid

- 21 range timebase • 100mS-1uS trigger delay • Front panel trace rotate • Multi-mode display

Optional carrying cases available for all 'scopes.

### Coline Probes

A comprehensive range of probes and accessories is available. Modular types have pencil slim heads and detachable earth leads. They offer excellent pulse responses and very wide bandwidths. A comprehensive catalogue is available on request.

### SP100 - 100MHz Probe

**\$28** ex tax  
\$32.20 tax paid

With x1, ref, x10 positions. 1.5m lead, BNC connector and selection of tips in heavy duty pouch.

All prices are plus sales tax if applicable and subject to change without notice.

SOLD & SERVICED IN AUSTRALIA BY

**ELMEASCO**

**Instruments Pty. Ltd.**

**NEW SOUTH WALES**  
15 Macdonald Street,  
MORTLAKE  
P.O. Box 30, CONCORD  
NSW 2137  
Tel: (02) 736 2888  
Telex: AA25887

**VICTORIA**  
21-23 Anthony Drive,  
MT. WAVERLEY  
P.O. Box 107, MT. WAVERLEY  
VIC 3149  
Tel: (03) 233 4044  
Telex: AA36206

**QUEENSLAND**  
243 Milton Road,  
MILTON  
P.O. Box 2360, BRISBANE  
QLD 4001  
Tel: (07) 369 8688  
Telex: AA44062

**SOUTH AUSTRALIA**  
99 King William Street,  
UNLEY  
P.O. Box 1240, ADELAIDE  
SA 5001  
Tel: (08) 271 1839  
Telex: AA88160

**WESTERN AUSTRALIA**  
P.O. Box 95, GOSNELLS  
WA 6110  
Tel: (09) 398 3362

**N.S.W.** Ames Agency 699 4524 • George Brown 519 5855, (049) 69 6399 • Davred 267 1385 • DGE Systems (049) 69 1625 • Macelec (042) 29 1455 • Radio Despatch 211 0191 • Sheridan Electronics 699 6912 **N.T.** Thew & McCann (089) 84 4999 **A.C.T.** George Brown (062) 80 4355 **VIC.** Browntronic 419 3986 • G.B. Telespares 328 4301 **QLD.** Colourview Wholesale 275 3188 • St. Lucia Electronics 52 7466 • Electronic Shop (075) 32 3632 • W.G. Watson (079) 27 1099 • Nortek (077) 79 8600 • ECQ Electronics 376 5677 • Northern Circuits (070) 51 9063 • Fred Hoe & Sons 277 4311 **S.A.** Redarc Electronics 278 7488 • Trio Electrix 51 6718 • Protronics 212 3111 **W.A.** Atkins Carlyle 321 0101 **TAS.** GHE Electronics (002) 34 2233 & (003) 31 6533.

**bankcard**




AUSTRALIA'S LARGEST SELLING ELECTRONICS MAGAZINE

# ELECTRONICS AUSTRALIA

Volume 46, No. 5, May 1984

## Deluxe Car Burglar Alarm



Stop your car from being stolen. This new car burglar alarm features delayed entry and exit, automatic reset, a separate horn speaker, and provision for an auxiliary battery. See page 46.

## Relax with the Stress Monitor



Learn to relax with our Stress Monitor. It can be used for biofeedback experiments, or you can use it as a simple lie detector. Construction starts on page 60.

## On the cover

One of our staff members shows how easy it is for your car to be stolen. Protect your property by fitting our new Car Burglar Alarm (see p46). Inset shows the new Cat computer from Dick Smith Electronics (see p22).



## Features

- 14 SYDNEY'S TRAFFIC LIGHT SYSTEM *How it is controlled*
- 131 COMING NEXT MONTH *New projects on the way*
- 132 50 & 25 YEARS AGO *Radio ratings, hovercraft debut*
- 133 CROSSWORD AND CARTOON *Mental stimulation and light relief*

## Hifi, Video and Reviews

- 30 TECHNOLOGY ON THE MOVE *New developments in audio and video*
- 36 HIFI REVIEW *Shure V15 Type V cartridge*

## Projects and Circuits

- 46 DELUXE CAR BURGLAR ALARM *Keep thieves at bay*
- 60 STRESS MONITOR *Learn to relax with biofeedback*
- 74 A VERSATILE LCR BRIDGE PT. 3 *Calibration and use*
- 80 OP AMPS EXPLAINED PT. 3 *Noise and what can be done about it*
- 90 PROGRAMMABLE LIGHT CONTROLLER *For a variety of light patterns*
- 72 CIRCUIT AND DESIGN IDEAS *Fluid level detector, car navigation aid*

## Personal Computers


- 22 THE CAT COMPUTER *Runs Apple II programs and more*
- 122 MICRONEWS *Koala TouchTablet reviewed*

## Columns

- 40 FORUM  
*Enough to turn a bloke into an audio agnostic!*
- 66 THE SERVICEMAN  
*TV/VCR compatibility*
- 116 RECORD REVIEWS  
*Classical, popular and special interest*

## Departments

- 3 EDITORIAL
- 6 NEWS HIGHLIGHTS
- 104 NEW PRODUCTS
- 110 BOOKS AND LITERATURE
- 112 LETTERS TO THE EDITOR
- 128 INFORMATION CENTRE
- 134 MARKETPLACE
- 128 NOTES AND ERRATA

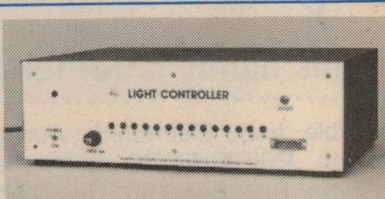

## Programmable light controller

Plug this unique project into the output port of any 8-bit personal computer and you can automatically switch up to 14 240VAC lighting channels in any pattern you desire. It's just the thing for in-home lighting control or for shop front and stage displays. Software for the MicroBee and TRS-80 computers is included with the article.



# HOT OFF THE PRESSES

ONLY \$4.50  
+ 90c pack & post

- MAINS POWER CONTROL PROJECTS
- AUTOMOTIVE PROJECTS

Contains  
10-year  
EA Project  
Index

## ELECTRONICS AUSTRALIA projects & circuits

\$4.50

Number 3, 1984  
First printing

Transistor  
-assisted  
ignition  
system

Video  
amplifier  
for  
computers  
& VCRs

An  
easy-to-build  
photographic  
timer

Simple  
breath tester  
checks blood  
alcohol

MUSICOLOUR IV

10-YEAR EA PROJECT INDEX

Use this handy order form

Available from Electronics Australia, 57 Regent Street, Chippendale Sydney, PRICE \$4.50 or by mail order: Post coupon to Electronics Australia, P.O. Box 163, Chippendale, 2008.

Please send me . . . . . copies of Projects & Circuits No 3 at \$5.40 each (includes post and packing)

NAME . . . . .

ADDRESS . . . . .

POSTCODE . . . . .

☐ I enclose Money Order/Cheque to the value of \$ . . . . .

☐ Please charge my Bankcard \$ . . . . .

Bankcard Number 496 . . . . .

Expiry Date . . . . . Cardholder Signature . . . . .

If you are using Bankcard, be sure to include your full address (not a PO Box)

20  
TOP PROJECTS  
REPRINTED  
FROM  
ELECTRONICS  
AUSTRALIA



**EDITOR**

Leo Simpson  
B. Bus. (NSWIT)

**ASSISTANT EDITOR**

Greg Swain, B.Sc. (Hons. Sydney)

**EDITORIAL CONSULTANT**

Neville Williams  
F.I.R.E.E. (Aust.) (VK2XV)

**TECHNICAL STAFF**

John Clarke, B. E. (Elect. NSWIT)  
Colin Dawson  
Robert Flynn  
Peter Vernon, B.A., L.L.B. (NSW)

**ART DIRECTOR**

Merton Jones

**PRODUCTION**

Danny Hooper

**SECRETARIAL**

Christine Cleary

**ADVERTISING MANAGER**

Selwyn Sayers

**CIRCULATION MANAGER**

Alan Parker

**Editorial and Advertising Office**

57 Regent St, Chippendale 2008.

Phone (02) 699 3622 Telex 25027.

Postal Address: PO Box 163, Chippendale, 2008.

Advertising Sales Manager: Sel Sayers.

Melbourne — 392 Little Collins St, Melbourne

3000. Phone (03) 602 3033.

Representative: Mark Christian.

Adelaide — Charles F. Brown & Associates  
Ltd, 178 Fullarton Rd, Dulwich 5065

Representative: Sandy Shaw (08) 332 7711.

Perth — 454 Murray Street, Perth 6000.

Representative: Ashley Croft (09) 321 8217.

**Circulation Office**

Unit 3B, Sydneygate, Waterloo, 2018.

Phone (02) 699 2388.

**Subscriptions**

Subscription Dept, John Fairfax & Sons Ltd,

GPO Box 506, Sydney 2001.


Enquiries: Phone (02) 699 2388.

Registered by Australia Post —

publication No. NBP0240.

ISSN 0313-0150

\* Recommended and maximum price only.



## Editorial Viewpoint

### Electronics is not a soft option

From time to time we have young readers writing to us for advice on how to pursue a career in electronics. We regard this as symptomatic of the times. In the past such advice was rarely asked for. The interested person did not need it and there were plenty of job opportunities in the electronics industry.

Now the situation has changed quite markedly. There are relatively few job opportunities in the electronics industry, at least as far as large manufacturing companies are concerned, and competition for those jobs is intense. In that respect, electronics is little different from most fields of endeavour.

The trouble is that by the time most people have left school the die is cast. They have either studied and passed well in subjects that will give them an entrance to electronics courses or they haven't. If they haven't, they may be able to retrieve the situation by several years of study at night school but that is not an attractive proposition.

For today's students the earlier they set themselves on a path to an electronics career the better. In fact, the path really has to be set from the day that they enter secondary school. And the subjects they must take are not the easy options. They must take higher level mathematics and the science subjects, physics and chemistry.

That the student must do well in these subjects is mandatory. And doing well merely gives you a chance to do a tertiary course, whether it be at certificate or degree level. It is a sad thing that this must be so but it is well to acknowledge the fact while the student is still at school when something can be done about it.

So to students who wish to prepare themselves for a career in electronics, start now. Aim to do well in mathematics and science subjects and forget the easy options. In the long run they are the hardest options of all.

### Science subjects can be made more relevant

At the same time as advising students to take the hard options we must admit that these subjects could be made a lot more relevant and interesting to students. Unfortunately, mathematics and science subjects are often presented by teachers who have little or no idea of how their subjects are applied to modern technology.

For example, how many students being taught calculus and the equations for a parabola are told that the equation  $y^2 = 4ax$  is the basis of headlight reflectors and microwave dish antennas and this equation is the only profile that will bring parallel rays to a single-point focus. I certainly was not, and it was not until years afterwards that I realised the significance of that equation. How much easier it would have been if I had known that.

And again, how many students are taught about induction coils without ever learning that the biggest and most important application of this basic science is in car ignition systems. This points to a basic lack of background knowledge of the teachers.

There is still too much teaching of mathematics in the dry and abstract sense which makes it hard for students. Teachers who can relate their subjects to everyday objects are doing their students a great service.

**Leo Simpson**

Printed by Magazine Printers Pty Ltd, Regent Street, Chippendale and Masterprint Pty Ltd, Dubbo, NSW for Magazine Promotions, Regent St, Chippendale.

Copyright. All rights reserved.

Information is furnished in this magazine without responsibility for its ultimate use or for any failure of equipment to operate as expected, or for any damage, loss or injury which may be sustained. Patents may apply to devices or arrangements depicted in this magazine. Material intended for publication is submitted at the sender's risk and while care will be taken, responsibility for any possible loss will not be accepted by "Electronics Australia".

**Distribution:** Distributed in NSW by Magazine Promotions, 57 Regent St, Chippendale, in Victoria by Magazine Promotions, 392 Little Collins Street, Melbourne; in South Australia by Magazine Promotions, 101-105 Waymouth St, Adelaide; in Western Australia by Magazine Promotions, 454 Murray Street, Perth; in Queensland by Gordon and Gotch (A'asia) Ltd; in Tasmania by Ingle Distributors, 93 Macquarie St, Hobart; in New Zealand by Gordon and Gotch (NZ) Ltd, Adelaide Rd, Wellington.



# POST CATALOGUE BARGAINS

Like Noah's Ark some of our products didn't make our 1984 catalogue. Most did (but we have too much stock). We have to clear stocks to make way for brand new products! Grab the bargains now while they last!!

## CONDUCTIVE PLASTIC BAGS

**Manufacturer's distress stock - you Reap the Benefit!**

Jaycar has made a scoop purchase of heavy duty conductive plastic bags with inbuilt zipper closer. Each bag measures a generous 280 high x 205 wide. They will accommodate complete S-100 boards, RAM cards etc. You can store your precious ICs in them safely. (The bag would hold hundreds of ICs). Quantities strictly limited. First in first served. Cat. ZB-9990

**1-4 BAGS \$2.00**  
**5-9 BAGS \$1.50**  
**10 Up BAGS \$1.00**  
(each)


**50% REDUCTION ON THIS PRICE FOR MAY ONLY**



**uniden®**  
**WORLD BAND RADIO**  
**MODEL CR-2021**

Very popular HF/FM receiver with digital readout and scanner facility. Cat. DR-6010  
**NORMALLY \$299**

**MAY ONLY \$269**  
**SAVE \$30**



**SCOOP! 8" CEILING GRILLES**  
*Will they ever be this cheap again?*

Once again - a massive scoop purchase with a difference. We have purchased a very large quantity of 'reject' grilles. They are rejects because they have small flaws in the mouldings. Most people however cannot pick the flaws if allowed to examine the grille. Imagine what the flaws look like *9 feet up* on the ceiling! Naturally we are offering a massive saving over normal units which we also sell. Exactly the same units (sans flaws) have been sold throughout Australia in the 10's of 000's. The perfect ones sell for around \$2.95 - at least one company sells them for well over \$3.00. Cat. AX-3560

**WHAT PRICE US?**

**1-4 UNITS \$1.50**  
**5-19 UNITS \$1.25**  
**20-49 UNITS \$1.15**  
**50 + UNITS 99¢**

PRICES INCLUDE TAX  
P.A. INSTALLERS - GO FOR IT!  
**TAKES STANDARD 8" SPEAKERS**

## 28 PIN IC SOCKETS

**The Cheapest in the WORLD??**

Well maybe, maybe not. But we think - maybe! Quality production types. Cat. No. PI-6507


1-9	10-24	25-99	100-999	1000
40¢	(50¢)30¢	(45¢)25¢	(45¢)20¢	(45¢)15¢

Normal prices shown in brackets - check the savings!!

## MINI BREADBOARD

**BARGAIN TIME**


390 HOLES, perfect for small projects. Measures 80 x 60 mm. Several units can be made to lock together for larger breadboard configurations. Self-adhesive back.  
**NORMALLY \$6.95**  
**MAY ONLY \$4.95 SAVE \$2**  
Cat. PB-8808



## SOLDERING IRON TEMPERATURE METER

**EASY TO USE!**

Apply solder to the tip of soldering iron and then press the temperature sensor as shown.



**ONLY \$19.95**

Quantities strictly limited!

ENGINEERS & OTHER PROFESSIONALS PLEASE NOTE! This compact, easy-to-read unit has a calibrated thermocouple to accurately measure the temperature of your soldering iron. Most adjustable temperature controlled irons don't have a readout so you don't know what the temperature is! Simply allow your iron to reach temperature and touch it to a point on the front of the meter. The movement is sensitive enough to be driven direct from the thermocouple junctions. No batteries are needed and the meters should last forever. The scale is easy to read, calibrated in °C and also gives coloured bands to identify correct soldering temperature. It is a must for the professional who cannot afford bad solder joints or overheated boards (especially plated-thru PCB's). Cat. QT-2100

**NORMALLY \$29.95**  
**SAVE \$10.00**

## 10" ELECTRIC GUITAR SPEAKER

Quality Pioneer brand - check the specs! Check the price!!  
**HURRY**

Impedance	8 ohms
Voice Coil dia.	1 1/2"
Power Rating	60W (RMS)
Resonant Frequency	80Hz
Sensitivity	98dB/W
Response	80Hz - 7,000Hz
Total Flux	61,100 Maxwell
Flux Density	8,300 Gauss
Net Weight	1,540 grams


**ONLY \$29.95**



## MICROBEE KEYBOARD

Full 60 key QWERTY Computer Keyboard exactly the same type as has been used up to now with the famous MicroBee Computer. SPST keys. Complete with mounting plate, all key caps etc. Fully assembled - incredible value.  
Cat. XA-5500

**ONLY \$29.95**

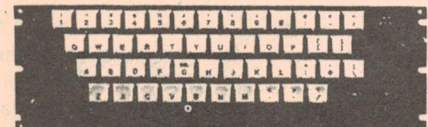

## DIGITAL DELAY LINE KIT

**ONLY \$449**  
**\$25 OFF**  
(this price)  
**MAY ONLY**

The Digital Delay Line is designed to produce a huge variety of electronic effects. It works very well but the amazing thing is the low, low price! The effects depend on the time delay selected and some of those included are: Phasing, Flanging, Chorus, ADT (Automatic Double Tracking), Echo and Vibrato. The delay time can be varied from 0.32mS to 1.6 seconds! Because the signal is stored in digital form there is, unlike analog systems, no degeneration of the signal with time and unlimited repetition is provided by use of the freeze control. All the controls mount directly upon PCB's to eliminate wiring and to further simplify construction the main board is 'plated thru' i.e. there are no wire links or link through pins. The whole expanded 1.6 seconds model all fits on the main board as does the 400mS basic model. The cabinet which is free standing but also suitable for 19" rack mounting, is fully finished to a very high standard. The panel is deep blue whilst the cover is sprayed with a durable black enamel. The kit is available for only \$424 - compare that with inferior units that can cost over \$2,000!!  
Cat. KJ-6621



**COMPLETE 400MS VERSION**





**AV6500 VIDEO  
ENHANCER**  
NORMALLY \$89  
**MAY ONLY**  
**\$72.50**  
AC adaptor to suit  
Cat. MP-3010 \$12.50



### JEWELLER'S SCREWDRIVER SET BARGAIN!

A vinyl case containing 6 pieces of high quality plated Jewellers screwdrivers. AN ABSOLUTE MUST in every workshop.

GRAB ONE IN MAY AT A BARGAIN PRICE!

**NORMALLY \$3.95 - THIS MONTH \$2.95**  
**SAVE 25% - Cat. TH-2005**

**25% OFF**

### MICRO PROFESSOR SELLOUT

We have discontinued the MPF-II Micro Professor Computer. At present we are holding substantial stocks of the MPF-II, Disc Drives, Software and other peripherals. If you are a MPF-II owner send a stamped addressed envelope for a list. Prices are up to 50% below our low normal prices on these products.

### "JET PHONE" ADAPTOR - NEW - IDEAL FOR AIR TRAVELLERS!!


How many times do you travel by air? If you are a regular traveller in economy, you will be undoubtedly familiar with the plastic 'pneumatic' type of stereo headphones. Well, we think that they are hopeless!! They are uncomfortable (in our opinion) and unless you get a good fit, the sound quality is poor. Wouldn't it be nice to be able to use your OWN high quality headphones in flight?

**NOW YOU CAN!!**

The Jaycar AA-2040 JET PHONE ADAPTOR plugs into the two air sockets on the armrest. You then plug your headphones into the adaptor for comfortable Hi-Fi sound!!

**BRILLIANT AND INEXPENSIVE!!**

**ONLY \$8.95**



### PF4363 TRANSFORMER

As used in 300 watt amplifier kits. Back in stock. Genuine high-spectranny. ★ Secondary 94V @ 3 amps (47-0-47) plus 2 x 15V @ 500mA

★ Primary 240V  
Cat. MM-2017

**NORMALLY \$49.50 - MAY ONLY**

**\$45.00**

### 240V CASSETTE HEAD DEMAGNETISER

We have made a massive scoop purchase of this popular item. **Normally \$8.50 each**

**MAY ONLY \$5.95 - SAVE \$2.55**  
Cat. AC-1600



### QUALITY "AIRPAX" DC CIRCUIT BREAKER

Unbelievable bargain. Quality Airpax U.S. made unit features large on/off rocker switch and snap-in panel mount capability. SPECS:

- Trip current 10 amps
- Full load 8 amps @ 50V DC
- Delay 59ms
- Measures: 35(dx)40(h)x18(w)mm body only

Cat. SY-4080

**ONLY \$2.95 EACH  
OR 10 PLUS \$1.95 EACH**

### VIDEO TO RF MODULATORS

Very scarce lately. Now back in stock.

As used in many kit projects. Will convert composite video to TV (VHF channel 0 or 1). Enables you to use your TV as a monitor.

Cat. LT-3900

**ONLY**

**\$6.95**

**BACK IN STOCK**



### MICROBEE CARRY CASE

Ideal for mobile 'Bee' users. Beautiful brown vinyl case with attractive MicroBee logo embossed on the front.

**NORMALLY \$12.50**

**\$9.95** Cat. XA-5570

**MAY ONLY**

**2708 EPROM -  
ARE WE CRAZY?**

- You normally can't get them!!
- They normally sell for \$7.95 from us (which is cheap)
- Limited Quantity
- Offer strictly limited

Cat. ZZ-8450


**ONLY \$4.95**

### 2ND PURCHASE 48V "USELESS" RELAYS

We were staggered by the demand for the ANRITSU 48V relays advertised earlier this year. They were an incredible bargain at 30¢ in quantities of 10. Some customers were buying hundreds at a time! Naturally we ran out. We are now pleased to advise that we have purchased another (smaller) batch. Unfortunately they cost us considerably more, but we feel that they are still a bargain!

Cat. SY-4015

**1-9 \$1.25 each  
10 up 95¢ ea**



### CLOSEOUT SALE - CONSOLE BOXES

High quality ABS moulded boxes made in England. The cabinets come in two sizes and feature 'Tub' construction. An aluminium panel sits recessed in the top held in place by screws that seat in brass inserts inside the case. Each size is available in 4 colours, Orange, Grey, Blue and Black. Ideal for any application requiring a console box.

SIZE 1. 161(w)x96(d)x39(h)x57(hr)mm  
Cat. HB-6200 ..... ORANGE  
Cat. HB-6201 ..... GREY  
Cat. HB-6202 ..... BLUE  
Cat. HB-6203 ..... BLACK

**1-9 \$6.95 ea 10 up \$6.45 ea**

SIZE 2. 215(w)x130(d)x47(h)x73(hr)mm  
Cat. HB-6210 ..... ORANGE  
Cat. HB-6211 ..... GREY  
Cat. HB-6212 ..... BLUE  
Cat. HB-6213 ..... BLACK

**1-9 \$12.95 ea 10 up \$11.95 ea**

**THE ABOVE PRICES LESS  
40% - MAY ONLY**



### SUBWOOFER CABINET

Quality vinyl look pre-cut cabinet. Complete with speaker cloth already mounted.  
Cat. KA-1454

**NORMALLY \$79  
MAY ONLY \$69**

**Jaycar** Incorporating  
**ELECTRONIC AGENCIES**

**SYDNEY**

SHOWROOMS

117 YORK STREET - PHONE: (02)264 6688 and (02)267 1614

TELEX: 72293

**CARLINGFORD**

Cnr. CARLINGFORD & PENNANT HILLS ROAD - PHONE: (02)872 4444

**CONCORD**

115 - 117 PARRAMATTA ROAD - PHONE: (02)745 3077

**HURSTVILLE** 121 FOREST ROAD - PHONE: (02)570 7000

### NUMBER 1 FOR KITS

POST AND PACKING CHARGES  
\$5 - \$9.99 (\$1.50) \$10 - \$24.99 (\$3.20)  
\$25 - \$49.99 (\$4.50) \$50 - \$99.99 (\$6.50)  
\$100 - \$198 (\$8.00) Over \$199 (\$10)

"Free INSURANCE for Road & Registered Post over \$200"

All heavy or bulky items (over 20kg.) sent Comet Road Freight \$12.00 anywhere in Australia.

SHOP HOURS CARLINGFORD, CONCORD & HURSTVILLE  
Mon - Fri 9am - 5.30pm; Sat - 9am - 12pm; Thurs night 8.30pm (Not Concord)

SHOP HOURS SYDNEY  
Mon - Fri 8.30am - 5.30pm; Sat - 8.30am - 12pm; Thurs night 8.30pm

MAIL ORDERS AND CORRESPONDENCE - P.O. Box 185, Concord, 2137



Mail Order  
By




**BANKCARD**  
Via Your Phone

**STOP PRESS!! NOW OPEN ALL DAY SATURDAY (CONCORD STORE ONLY)**



# News Highlights

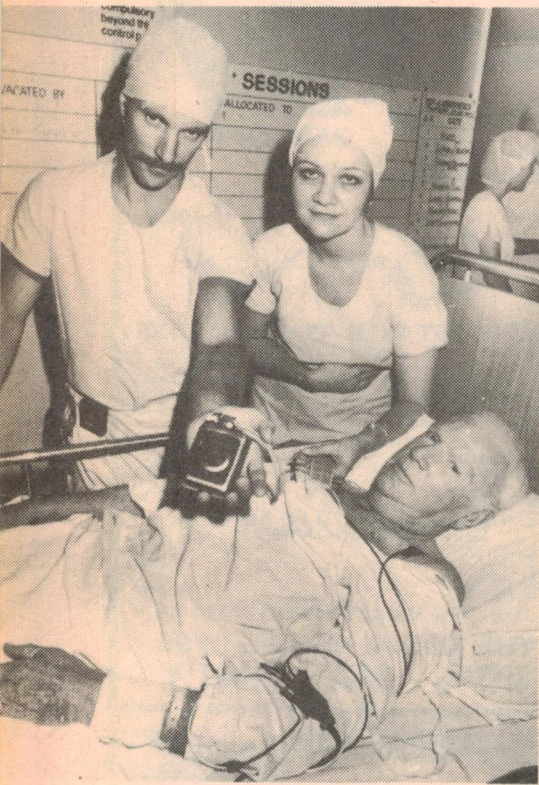

Dr Hellestrand shows the defibrillator before implantation in patient Patrick Gilmour.

## Implantable defibrillator increases the odds for heart patients

Each year, around 30,000 Australians die suddenly from heart failure, caused either by a coronary occlusion (a heart attack) or a disturbance of the electrical rhythm which controls the beating of the heart. One method of treating heart rhythm disturbances is the implantable defibrillator similar to that received by New Zealander Mr Patrick Gilmour.

Patrick Gilmour suffered from ischaemic heart disease and coronary artery disease in which the arteries feeding the heart had narrowed and blocked blood supply through the heart. Prior to the operation to install the defibrillator his heart stopped 13 times and was restarted but he remained prone to ventricular fibrillation, a condition characterised by rapid, irregular heart action that leads to heart failure.

The implantable defibrillator was developed in the United States to restart the heart automatically. It consists of electrodes attached to a metal coil inside

## New kit supplier

Yet another company has emerged to serve the growing kit electronics market. The appropriately named "Kitronics" company is a Melbourne-based mail order house offering a range of projects to the kit constructor.

Managing Director Richard Stott says "We build a sample of every kit we carry, to ensure quality of components and completeness of the sample. This ensures that any shortcomings in quality or constructional methods are eliminated before they reach the customer. Nothing is more infuriating than trying to construct a kit with inferior components so when we build our samples we are constantly on the lookout for ways of improvement".


Kitronics kits are available from PO Box 126, Epping, Vic 3076 or by Bankcard phone order on (03) 439 3591 or (03) 435 0865 after hours.

the heart on a 15cm flexible lead and another lead attached to a flat teflon patch on the exterior wall of the heart. Both leads are linked to electronics contained in an hermetically sealed titanium box sewn into the wall of the abdomen.

The device responds both to the heart rate and the profile of the electrocardiogram waveform detected by a pair of electrodes implanted in the heart. When an abnormal heart rhythm is detected a shock is sent through the heart within 15 seconds to restore the normal heart action.

Electrical activity, however, is only one determinant of heart function. Mr Gilmour's heart eventually failed to respond to the normal electrical rhythm produced by the heart itself. In the final event the electrical rhythm of his heart remained within normal bounds but the mechanical pumping action failed. His death underlined the importance of early diagnosis and treatment of heart disease.

According to Dr Kevin Hellestrand, one of the participants in the two hour operation to implant the defibrillator, the device itself has proved its usefulness. Of those revived after sudden heart failure caused by ventricular fibrillation, some 30 to 40% will die in the first year following the event. In the United States the defibrillator has reduced this to under 5%.

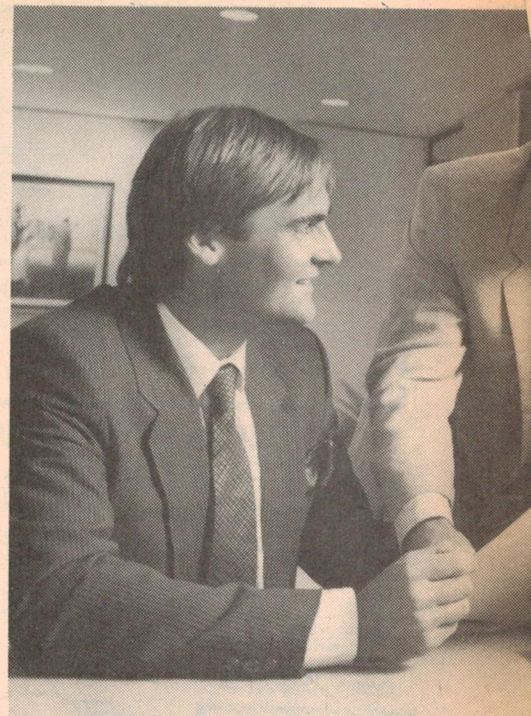

## Austpac adapted for Videotex

Following development work involving Melbourne company Computer Power, Telecom Australia and Elders IXL, Austpac has now been adapted to simplify use by videotex terminals.

The development will benefit the fledgling videotex industry in Australia as it enables the immediate establishment of national videotex networks at reasonable cost prior to the introduction of Telecom's Viatel gateway towards the end of this year.

Users of videotex terminals with simple numeric keypads can now originate calls through Austpac and access videotex host computers as easily and simply as by the present methods using the dial-up voice network.

The new facility - "Austpac - Access to Videotex Systems" was developed by Telecom with assistance from Computer Power and involves changes to Austpac Profile 9, which is now the default for 1200/75 bits per second access.

The changes were developed by Telecom using a Videotex terminal supplied by Visionhire, and the facility was finally tested by Elders IXL, who have 150 videotex terminals distributed throughout rural Australia. These terminals access a DEC VAX system in Melbourne, running Aregon IVS-3 videotex software, both supplied and managed by Computer Power.

The Elders IXL videotex system was the first and is currently the only videotex service in Australia using Austpac for ter-





David Hogg of Computer Power explains the Austpac system to Peter Beischer of Elders IXL farm information services.

terminal access.

The ability of Videotex users to access remote computers via Austpac is a breakthrough in the development of cost effective videotex systems in Australia. Until this development, Elders IXL rural users had been accessing the Melbourne host via a rotary group of 008 INWATS lines, at a cost of \$30 per terminal per hour. Computer Power have calculated that the cost for a typical videotex session using Austpac is approximately \$8 per terminal per hour, a saving of 73% of current national INWATS charges where terminals are more than 50km distant from the host.

## Big response to supplementary broadcasting licence scheme

All 36 commercial television stations located outside mainland metropolitan cities or in Tasmania have formally expressed interest in obtaining an extra, or supplementary, licence, the Minister for Communications, Mr Michael Duffy, has announced. In addition, 86 of the 101 eligible radio stations have formally expressed an interest.

## Volunteer radio station for visually handicapped

Radio station 3RPH Melbourne broadcasts from 8pm to 10.30pm on week nights with rebroadcast material from 10am to 12.30pm Tuesday to Saturday, specially for the blind and handicapped. The station is operated by two full time staff and around 150 volunteers who select material for reading over the air.

## Subscription TV by satellite under consideration

Proposals for the provision of Radiated Subscription Television (RSTV) services are currently being studied by the Government, although no decision has been made on whether such services will be permitted.

Once the Aussat satellites are launched in the second half of 1985, most Australians will be able to receive ABC television. A subscription service transmitted via satellite, however, might be the only way in which viewers in remote areas can receive additional television services, according to the Department of Communications.

Under such a scheme subscribers to RSTV would pay a monthly fee and receive transmissions over the air through a special decoder attached to their television sets. The government has decided that the three large eastern TV networks will not be allowed to direct broadcast, hence the RSTV proposal.

"Two of the major issues for the

The program content covers news, feature and sports stories of special interest to the handicapped, and organisers are hoping to expand the service to operate from 7am to 10pm seven days a week. This would be possible by building the station volunteer staff to at least 75 people. Volunteers are sought to work just a few hours each week, preparing and reading items for broadcast.

3RPH can be heard on 1629kHz, just above the AM broadcast band.

Government to consider when it looks at the RSTV proposals will be whether RSTV could boost Australian film and television production and also have an impact on the development of Australian technology," Mr Duffy, the Minister for Communications, said recently.

If RSTV went ahead, the providers of the service would have to pay an establishment fee plus a levy of 50c a month per subscriber. The levy would be paid into a special fund to encourage production of Australian films and television programs. "The fund guidelines will specify types of production which should be encouraged, for example drama and children's programs," Mr Duffy said.

In February the Government issued guidelines for RSTV proposals which specify that a certain minimum percentage of peak viewing time will be filled by Australian productions. No advertising will be permitted on RSTV services, and general television program standards will not apply — classifications for RSTV programs will be those of the Film Censorship Board, which are significantly broader than those applying to television programming.

The Supplementary Licence Scheme officially began on 1 December 1983 to provide people living outside the mainland capital cities with a more diverse range of radio and television programs.

Under the scheme, existing commercial stations in country areas may apply for a licence to operate a second broadcasting service. However, the Government has stated that it would prefer the establishment of an extra independent service, and supplementary licences will not be issued to existing broadcasters if the Australian Broadcasting Tribunal finds that an independent service is commercially viable and in the public

interest.

"This will ensure that wherever possible an extra independent commercial service is provided," Mr Duffy said. "The Government's aim is to increase diversity of choice in radio and television programming for people in regional areas, without promoting an over-concentration of media ownership in the area."

After applications have been accepted they will be directed to the Australian Broadcasting Tribunal which would if necessary schedule public hearings in the various areas. It is hoped that these will begin in the last quarter of this year.



### Jones criticises "avoidance syndrome"

Scientists suffer from an "avoidance syndrome", said Mr Barry Jones, the Minister for Science and Technology, in an address to new science graduates at Sydney University. He spoke at length on the lack of involvement of scientists in many important areas, including politics and industry and said that he was concerned by the contrast between the "extraordinary growth in power and pervasiveness of products in the physical sciences and the slow, even retarded, social response".

Scientists have generally not been particularly helpful in raising community debate and understanding about the relationship between science and society, the Minister said, and have been "extraordinarily silent" in the debate about the future. He was particularly critical of the tendency to concentrate on immediate work without considering its long term implications.

Scientists also exhibit "avoidance syndrome" with commercial exploitation of scientific discovery, said the Minister. Australia has a poor record in transferring pure research into products and there is only a "slender bridge" between the research community and industrial managers.


Mr Jones outlined five areas for action to overcome the problem, including an increase in the numbers of tertiary graduates in all fields, action to bridge the gap between research and management sectors and the creation of stronger mechanisms for transferring new technologies to industry.

### Red faces department

Due to a printer's error, most of the prices on the Jaycar advertisement, on page 10 of our April 1984 issue, were omitted. We apologise to Jaycar and to readers who may have been inconvenienced.

### UHF Tuner cancelled

Due to a number of technical problems we have been forced to cancel our promised UHF tuner project. We were not prepared to feature a project which would not at least equal the performance of UHF TV receivers and which would have required a difficult adjustment and assembly procedure. We apologise to readers who were looking forward to the project.

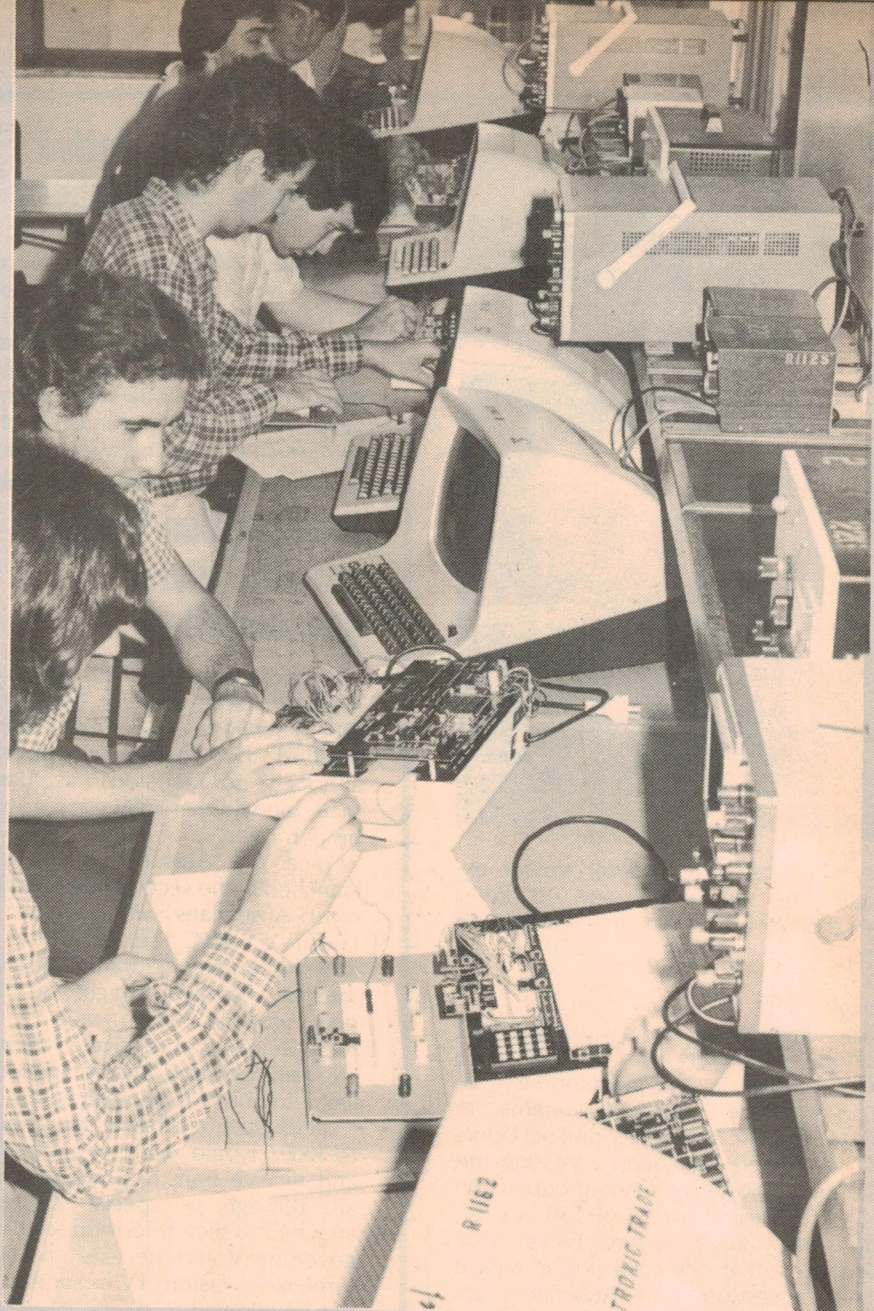

### New electronics labs for Sydney Tech.

The Electronics Division of the School of Applied Electricity has moved to a new location at Sydney Technical College. At a cost of \$2 million, Building L has been refurbished to provide re-designed and re-equipped laboratories and classrooms. The new facilities provide support for over 900 enrolled students per annum.

Training is provided at Trade and Post Trade levels with several special courses also being offered. There are no fees charged for any of these courses, which are available day and night.

Retraining for persons experienced in electronics is available in a wide variety of subjects. Retraining courses

are offered requiring four hours attendance per week for 18 weeks. Special courses are available in basic electronics, two way radio and electronic workshop practices, including printed circuit board techniques.

Various areas in electronics are provided for with courses in digital and microprocessor principles, electronic communications, television principles, sound reproduction, and electronic control principles. As can be seen from the photo above, the courses lay particular emphasis on practical work with the latest electronic equipment.


Courses are also held in other centres in New South Wales. For further information contact: Sydney, Mr K. Harris (02) 217 3400. Ext 3346; Newcastle, Mr J. Horsnell (049) 61 7367; Wollongong, Mr A. Gosnell (042) 29 0499.








# We're No.

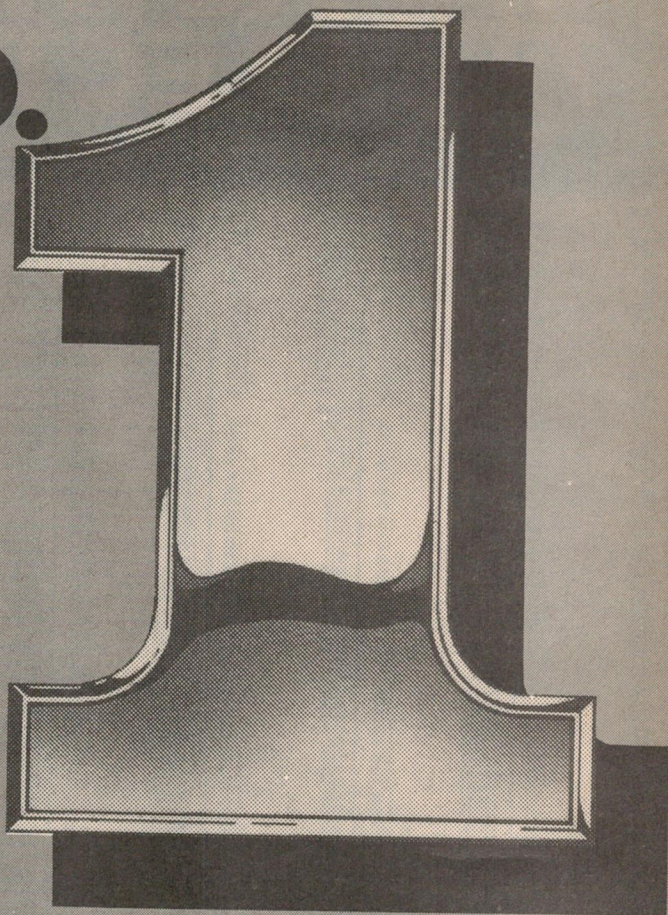

## NOW IN STOCK! ARRL RADIO HANDBOOK '84



This amazing book seems to get bigger each year! This volume contains new projects for 160m, VHF power supplies and lots more!

**\$19<sup>95</sup>**

Cat B-2219

## DICK SMITH'S Semiconductor Data Book

This book contains information on a variety of commonly used devices.

**ONLY \$7<sup>95</sup>**

Cat B-4200



## Magazine File

Magazines are too expensive to throw out. Keep them for later reference with our deluxe binders. Fits EA, ETI, AR, ARA, Your Computer.

**ONLY \$4<sup>50</sup>**



## Transmitting Valves

Type No. Cat No. Price

6146B D-7202 \$24.95


6JS6C D-7204 \$15.95

## 18V 14A Transformer

Massive 18V at 14A continuous... ideal for high rating power supplies. Suits 13.8V 25A pk supplies.

**ONLY \$49<sup>95</sup>**

Cat M-2010



## Cooling Fans

Getting a bit hot under the collar? Use one of these superb rotary fans: FANTastic for any device that needs forced air cooling. Can be mounted to suck or blow.



### Rotary Fan

120 x 120 x 40 mm deep, with mounting holes on 75 mm radius.

**ONLY \$19<sup>95</sup>**

Cat Y-8500

### Mini Fan NEW!

80 x 80 x 25 mm deep. Mounting holes on 51 mm radius.

**ONLY \$19<sup>95</sup>**

Cat Y-8505

Includes finger guard



**NEW!**

## Daisywheel Printer/Typewriter

This typewriter can be connected to your computer as a printer. Prints at 13 cps, choice of 3 pitches, impression control, auto correcting, full tabs and margin settings. Centronics-type interface.

Cat X-3275

**COMING SOON! \$895**



## Multimeter with audible continuity tester

A compact, reliable multimeter with an added bonus: a built-in buzzer for continuity testing! Also has a battery checker PLUS 10A DC range! High sensitivity (20,000 ohms per volt), meter mirrored scale and large banana plugs for sure contact.

Cat Q-1022

**\$29<sup>50</sup>**



## Multimeter & Logic Tester

This is the very first analog multimeter ever with its own built-in Logic Tester! Built-in LED's give instant recognition of 'HIGH', 'LOW' and 'PULSE' states of logic circuits. 18 voltage, current and resistance ranges, with 20K ohm/V sensitivity DC and 8K ohm/V AC. Complete with instructions, batteries and probes.

Cat Q-1026

**\$32<sup>50</sup>**



## Inductive pick-up



Cat C-7300

Suction cap sticks so no electrical connection needed. Ideal for amplifiers, tapes, etc (recording of phone conversations may not be permissible).

**ONLY \$1<sup>80</sup>**

**IT'S THE  
AMAZING  
BICYCLE  
COMPUTER!**




**\$49<sup>50</sup>**

Add a bike computer to your pushbike and you'll really know how well you're doing. Very simple to fit on all types of pushbikes, displays distance, speed, elapsed time, average speed etc. Cat Y-3010

## Xidex quality diskettes

Don't risk loss of valuable computer data by using 'economy' floppy disks - they could cost you a fortune! The new Xidex range of Precision disks offer a level of quality and reliability previously unknown.



**NEW!**  
Single sided, double density HARD sector Cat X-3505 \$4.95  
Single sided, double density SOFT sector Cat X-3510 \$4.95  
Box of 10 Single sided, double density SOFT/s Cat X-3512 \$54.50


## For the short wave listener! MW/FM/SW 9 BAND

Tune into the world with this 9-band receiver. Features tone switch, LED tuning indicator, telescopic antenna, earphone jack and built-in prop stand. Includes earphone, external antenna wire, protective case and full instructions.

Cat D-2837

**BATTERY OPERATED**

**\$119**




## 10A 240V Microswitch

SPDT contacts, 240V DC 10A rating. Ideal for use in burglar alarms, limit switches, etc.

**\$1<sup>95</sup>**

Cat S-1920





# for the hobbyist...

## It's a steal! Dick Smith Wizzard at cost!

Our loss is your gain! We're overstocked with the amazing Dick Smith WIZZARD and must clear excess stock. Hurry! Take advantage of our problems. Stocks strictly limited - Don't miss this amazing 1/2 price offer.



Cat Y-1600

WAS  
**\$295**

**\$139**

**WHILE STOCKS LAST!**

## NEW! Flux Remover

Fantastic for service work technicians and for cleaning up messy solder jobs! 400g spray can

**\$7.95**

Cat N-1055

## Soldering Stand with Magnifier

Heavy base, adjustable clips, solder stand.

**ONLY \$9.95**

Cat T-5710

## LED's, LED's Premium Quality!

Matched brightness, top quality. For those projects whose appearance really matters.

Colour	Size	Cat No.	Price 10 up
Red	3mm	Z-4077	.30¢ .25¢
Green	3mm	Z-4079	.35¢ .30¢
Yellow	3mm	Z-4081	.50¢ .45¢
Orange	3mm	Z-4083	.50¢ .45¢
Red	5mm	Z-4085	.30¢ .25¢
Green	5mm	Z-4087	.35¢ .30¢
Yellow	5mm	Z-4089	.40¢ .35¢
Orange	5mm	Z-4091	.40¢ .35¢
Red High Intensity		Cat Z-4075	.95/90¢

## Infra red beam relay

240V powered, with a 12V DC @ 1A output each time the beam is broken. Can be set for 'instant' and 'intermittent' (outputs five secs. after beam is broken).

Cat L-5050

**GREAT VALUE!**  
**ONLY**

**\$99**



## Low Cost Soldering Iron

A general purpose iron that gives 25 watts of heat very quickly. Stainless steel barrel and copper tip.

**\$9.95**

Cat T-1330

Spare tip to suit.  
T-1312  
\$2.75




## Multi-purpose stand

Adjustable vice, iron holder and spool holder. Leaves both hands free!

Cat T-5700

**ONLY \$29.50**



## NEW! Arlec Supertool

Don't buy an ordinary PCB drill: take a look at the new Arlec Supertool. It polishes, cuts, grinds, engraves, sands, mills & drills! Inc. mains adaptor



**\$39.95**

Cat T-4754

Spare Parts	
Drill bits T-4756	\$4.95
Grinding bits T-4758	\$5.95
Ink Erasers T4760	\$2.95
Pencil Erasers T-4762	\$2.95

## Digital LCD Multimeter BARGAIN!!!

What a special! Fantastic quality LCD digital multimeter with single knob selection (no messy lead swapping!) at a truly bargain price. Huge 10A AC & DC capacity, high impedance and 25 ranges. Normally great value... now fantastadicksagoriferous!

WAS  
**\$79.95**

This month **\$49.95**

Hurry... limited stock



Cat Q 1455

## It's Alarming!



**Horn Speaker**  
All-weather horn speaker with plastic body for long life. 8 ohms impedance, 10 watts rating.

Cat C-2705 **\$10.25**



**Reflex Horn**  
Larger horn with huge rating. For installations where a loud alarm is a must.

Cat C-2718 **\$26.50**

## Fire Bell

Huge 8 inch bell with massive gong, 12 volts operated at 300mA.

Cat L-5280 **\$34.95**



## Window Foil

Adhesive backed aluminium foil for window and door glass. 6.5mm x 32m roll.

Cat L-5200

**\$6.95**

## Reed switch/magnet set


In plastic cases, ideal for aluminium windows; includes mounting holes and screw terminals for wires.

**\$2.75**

Cat L-5210

## Microwave Alarm detector

Invisible microwaves detect any movement in the target area. Works through fibro, plaster, etc.




**ONLY \$95**

Cat L-5000

## Miss out on your Dick Smith Electronics catalogue?

How can you last the rest of the year without it? Rush - do not dawdle - to your nearest Dick Smith Electronics store and they'll swap a brand new, bright shiny Dick Smith Catalogue for one of your old, worn out \$1 notes.

And you'll even get the \$1.00 value back again with our \$1.00 bonus coupon!

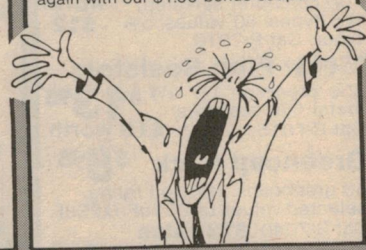


There's a store near you -  
or use our reliable home delivery service

# DICK SMITH ELECTRONICS

See page 98 for address details


Terms available to approved applicants through...



DSE A 741/KT



# ...and No.

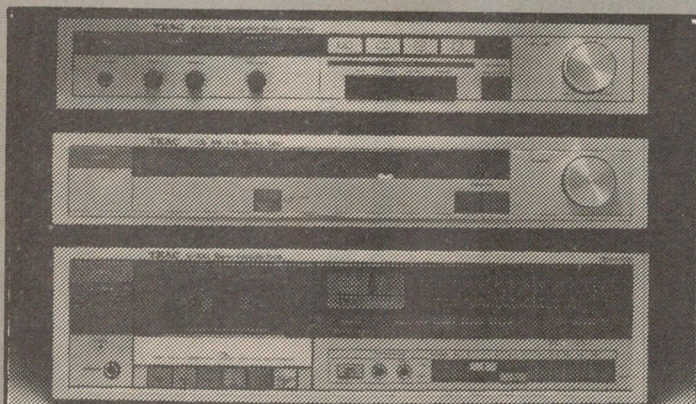

## Teac top performance system!

### Teac A-313: 22W/Ch Integrated Amplifier

Superb quality in a modern-as-tomorrow hi fidelity amplifier. DC coupled for optimum noise and distortion characteristics; 22 watts/channel rating. Suitable for two sets of speakers with A/B/AB switching. Cat A-1310

### Teac T-515: AM/FM Stereo Tuner

The perfect match for the A-313. With superb styling the T-515 is delightfully simple to operate, and even has a built-in recording calibration tone! 'Made for Australia' model with correct Australian FM band (not wrong overseas band!) Cat A-1510

### Teac V-300: Stereo Cassette

And to complete the trio- a superb 'metal' compatible stereo cassette deck with soft-touch controls and large LED peak level meters. Plus features not normally found in the V-300 price range: direct function mechanism, brilliance switch, Dolby B noise reduction, record mute function, independent l/r record level controls and much more! Cat A-3507

**SPECIAL OFFER** NORMALLY \$856  
Buy above three units & get the superb Dick Smith Belt Drive Turntable for only \$12 extra! **SAVE SAVE SAVE!**  
**SYSTEM PRICE \$699**

Buy your components the smart way

## BULK PACKS

### Resistor pack \$5.90

300 computer selected 1/4W types, 60 values, 5% types. Cat R-7010 **worth \$12**

### Metal Film Resistors

300 precision 1% 1/4W metal film resistors. Cat R-7015 **\$18 worth**

### Greencap Pack \$8.95

60 greencaps. 100 volt rating, selected values of .001uF-0.22uF. Cat R-7040 **\$13 value**

### Electrolytic Pack \$6.75

55 single ended electros, 2.2 to 470uF, voltages form 10 to 25. Cat R-7030 **\$13 worth**

### Ceramic Pack \$4.75

Over 60 quality ceramics, none less than 50VW, some as high as 630VW. Selection of range from 10pF to 0.1uF. Cat R-7050 **\$7 value**

## Prototype Boards


No more rats nests! The easy way to build up circuits.

Mini board (size 80x60x8mm)

Cat P-4614..... **\$9.20**

Giant board (size 175x67x8mm)

Cat P-4615..... **\$13.95**



## Electronic Buzzer


Solid state warning, operates from 4-15V DC. Tiny (32 x 14.5mm) with massive 70dB@ 1m output. Cat L-7009



ONLY **\$1.95**

## Casio FX-550 Calculator

Superb, new calculator from one of the world's leading manufacturers, with features you'd expect to pay \$\$\$ more for, like 10 digit LCD, 8 digit mantissa & 2 digit exponent, memory and lots more. The last word in pocket calculators, ideal for high school and university students. Cat Q-3100



Recommended by many leading schools! ONLY

**\$42.50**

## Printed Strip boards

The most versatile board of the lot! Etched copper strips are predrilled and plated ready for solder.

2.54mm spacing x 76mm x 153mm

Cat H-5612.... **\$3.15** (10 up \$2.90)


2.54mm spacing x 76mm x 76mm

Cat H-5614.... **\$1.65** (10 up \$1.55)

2.54mm spacing x 76mm x 153mm

As H-5612 board, but with pre-cut short tracks making it ideal for multi IC work. Plated strips.

Cat H-5616.... **\$3.55** (10 up \$3.25)



## Stackable Parts Drawers

Somewhere to keep all those bits and pieces. Stackable, too: very handy! Two styles:

One drawer per box **\$3.15**

Cat H-2584 Two drawers per box **\$3.15**



## Dick Smith ZIPPY BOXES

Small-UB5(28x54x83mm) Cat H-2755

**\$1.80** (10 up \$1.60)

Medium-UB3 (41x68x130mm) Cat H-2753

**\$2.25** (10 up \$2.05)

Large-UB1 (50x90x150mm) Cat H-2751

**\$2.80** (10 up \$2.55)

Giant-UB2 (60x113x196mm) Cat H-2752

**\$3.99** (10 up \$3.50)




## Adjustable Utility Box

This is a durable, lightweight utility box.

Compartment can be adjusted to suit your own needs. Dimensions: 285 x 40(h) x 170(d)mm.

Cat H-2592

**\$6.75**






# for kits & bits!

## Project Case


A superb case ideal for a large range of projects. Features removable front & rear panels, easy PCB mounting. Size 210x175x55mm



Cat H-2520  
**\$1250**  
(10 up \$11.50)

## Multi-output Solar Cell!

**NEW!**



21st century power!  
Encapsulated cell giving 3, 6 or 9V out at 50mA. Great for solar powered projects etc. complete with reflectors. Cat Z-4842

**ONLY \$2995**

## 19in Rack Mounting Case

Quality black instrument case fits standard 19in racks. Heavy gauge (3mm) front panel. Size 42.5 x 25 x 14cm.



Cat H-2481  
**\$4995**

## SAVE \$70 ON MIGHTY BEARCAT 20/20



Yes! Famous Bearcat 20/20 scanner-the one with the lot including dual power, aircraft band, etc - now reduced by an amazing \$70! Hurry, limited stock. Don't miss it!

was \$499  
**NOW ONLY \$429**

Cat D-2810

Our most popular scanner ever!

## Go anwhere with the FT-290R all mode

And save a bundle! Normally great value at \$429... now our most popular Yaesu 2m set is even better at \$399! All mode, portable/mobile/base set goes where you go. A bargain!

was \$429  
Cat D-2885  
**Now only \$399**



## The Amazing Stereo Simulator II

Wish those old video movies had modern stereo sound? This low-cost gadget turns almost any mono signal into amazingly good synthetic stereo! Cat K-4321



**ONLY \$1995**

## Fluoro Starter

Gives tubes a longer life!

This substitute electronic starter gives you a smooth rapid start EVERY time you switch on. Housed in an old starter case! Outlast conventional starters. Cat K-3082



**ONLY \$450**

## Car Alarm Mk2

Protect your car the easy, low cost way with this great kit. Simple to construct & fit; compare the cost with built-up alarms. Cat K-3253



**ONLY \$2250**

Includes die cast case, terminal block & Alarm sticker.

## Motor speed control

The latest in speed controller circuits, designed to eliminate all the problems of earlier types. Cat K-3081



**ONLY \$2250**

## Microwave Leakage Detector

Microwave ovens are fantastic - but are they completely safe? Yours could be leaking dangerous radiation! Check it out with this handy meter. Needs no batteries. Cat K-3095



**ONLY \$1395**


## New! Build your own Alien Invaders

Wow! You could save the earth from those pesky aliens... and on a kit you built yourself! Multi-level LED display, easy to build & battery operated. Cat K-3393



**\$1595**

## NEW! LET CALLER



Anyone for tennis?

When you play McEnroe, he won't be able to dispute any calls! Portable, battery operated - use on any court with wire rope for net. Cat K-3089

**ONLY \$1995**

## The not so random Breath Tester

Beware boys in blue and booze buses bailing belligerent Barbhams blowing bad breath into bags before banning. Check out our breath tester kit - it could be the answer to your problems! Cat K-3391

NOT LEGAL CHECK

**ONLY \$2995**



Now you can be heard!

## Loud Hailer

A great kit for the kids - their own loud-hailer! Exclusive detachable horn for minimising feedback, battery holder/handle, amplifier and mic module, it's so easy to build and it really works well! Horn can be remotely connected too. Cat K-3507

**TOP VALUE**

**\$2995**




## TV Pattern Generator

An indispensable aid for the serviceman or hobbyist! It gives you three patterns: dot, crosshatch and blank raster. Cat K-3472

**\$2995**

INCLUDES VIDEO MODULATOR



# DICK SMITH ELECTRONICS



See page 98 for full address details



# Sydney's traffic

*Have you ever stopped to think how traffic lights are controlled in a city like Sydney? Most of us regard traffic lights as a nuisance, yet an effective traffic light system is essential in any large city.*

by PHILIP WATSON

At some time or other we have all muttered rude words when halted at a red light while running late for that all-important date or business meeting. But the real enemy is not the traffic light; it is the opposing traffic which is demanding its share of the intersection. And remember, when you get a green light it is normally at the expense of someone else being held by a red light.

The problem of cross traffic at intersections is nothing new. Ever since there have been wheeled vehicles in large cities there has been this potential conflict. Apart from various rules or conventions — major and minor roads, give way to the right, etc — the most effective solution in the past has been the constable on point duty. Unfortunately, while effective, it is also very expensive — so much so that it becomes quite impractical to man every intersection in a moderate size city, and certainly not in one as large as Sydney.

To make matters worse, Sydney has its own special problems. There was very little early planning of the road system, it is hilly and it has an irregular waterfront to contend with, all of which adds up to an erratic road pattern with many curves and bends.

But, apart from special problems, every large city in the world faces the same problem; how to move vast numbers of vehicles into and out of the city in the morning and evening, and through it during the day, with minimum delay and conflict.

Virtually every city has tackled the problem in the same broad manner; by installing various forms of automatic traffic light systems. Depending on the traffic density and the complexity of the road pattern, they are successful to a greater or lesser degree.

## Early systems

The very earliest traffic light systems, in the USA and Great Britain, worked on a fixed time cycle basis, allocating a predetermined time period for each cross

street. Such systems had limitations, not the least of which was the situation where a driver found himself confronted by a red light when there was no cross traffic in sight, and had to sit and wait for the timer to complete its cycle.


The next approach was the vehicle actuated system, using mechanical or pneumatic actuators to sense the presence of a vehicle wishing to enter the intersection. Such systems have the advantage that they can be designed to sense the rate of traffic flow in each direction and modify the timing cycle to favour the heavier traffic flow. Also, during slack periods (late at night) they can respond rapidly to a vehicle's presence, in the absence of cross traffic.

The first traffic signals in Sydney were of the vehicle actuated type. They were installed at the intersection of Market and Kent streets and commissioned on 13 October, 1933. They were, in fact, only on trial and were not officially accepted from the suppliers until after a three month trial period.

Four more sets of signals were installed in 1937 at York and Margaret Streets, City; Clarence and Erskine Streets, City; Pyrmont Bridge Road and Booth Street, Camperdown; and Pyrmont Bridge Road, Wattle Crescent, and Jones Street, Forrest Lodge. From then on installations proceeded at an ever increasing rate. The 1000th set was installed in 1974 at Pittwater and Warringah Roads, Dee Why.

But long before that point was reached traffic management authorities worldwide had become aware of another problem. It is one thing to install vehicle actuated traffic lights to handle one or two busy intersections in a city area, but quite a different proposition when all intersections in the main city thoroughfares need traffic lights.

In these circumstances it is no longer sufficient that each set of traffic lights operates as an island unto itself; some form of co-ordination between traffic lights is essential. Otherwise one set of

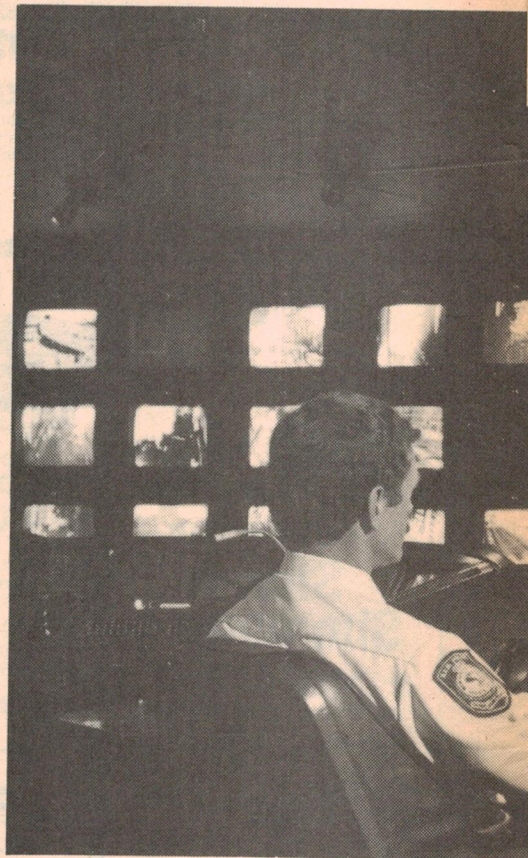

A portion of the SCATS Control Centre showing some of the 32 TV monitors, two of the control consoles, and a graphics display set suspended from the ceiling.

Right: Close-up view of a console showing, right, the monitor screen and, left, the visual display unit. The operator is using the joy-stick control to position the TV camera.

traffic lights can give a green light to an empty street while traffic is banked up against a red light at the previous intersection.


What is needed is some form of co-ordination pattern which will synchronise the lights according to the predominant traffic density — ie, into the city during the morning peak and out of in the evening — and the rate at which it can flow.

Various approaches to this problem were made by traffic authorities, with varying degrees of success, but always seeming to fall short of the ideal. Most schemes were based on a number of fixed traffic programs; programs based



# light system

## *how it works*

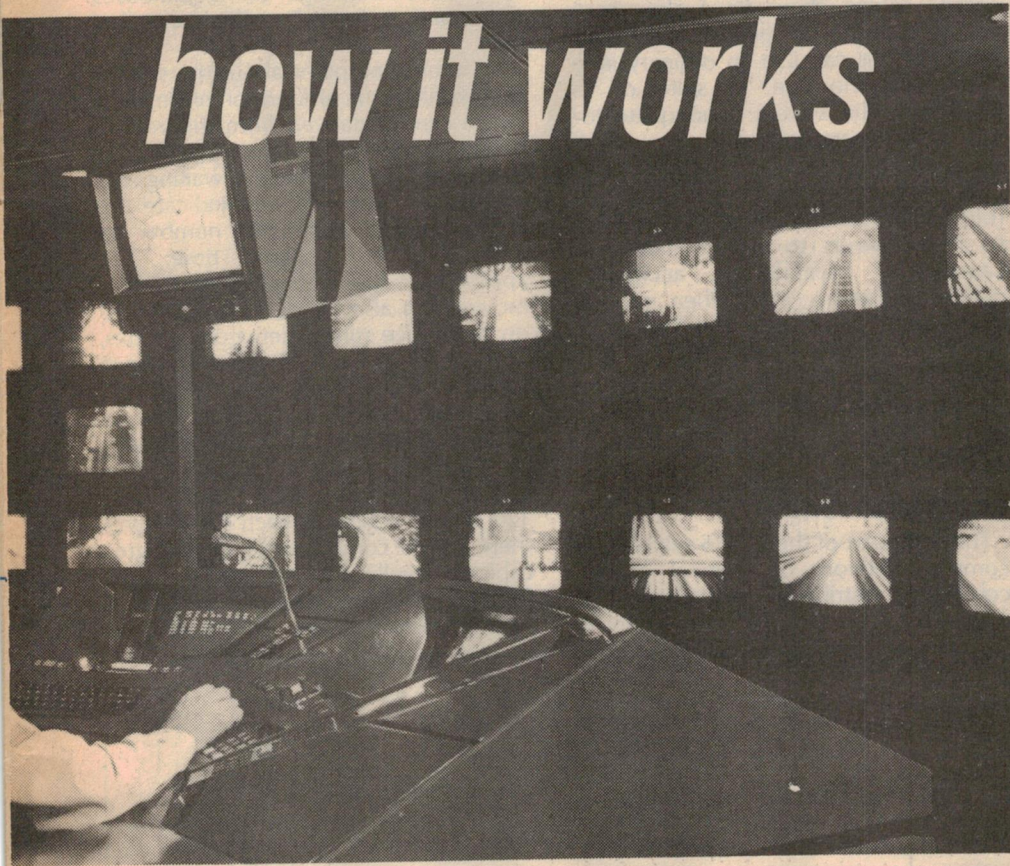


on the average traffic flow in various directions according to the day of the week, time of day, and as many other predictable factors as possible.

To this was usually added a closed circuit TV supervisory system whereby

traffic controllers in a central location could observe the general traffic flow, detect breakdowns or parking violations which were hindering traffic, and take steps to correct the situation.

This concept offered a considerable

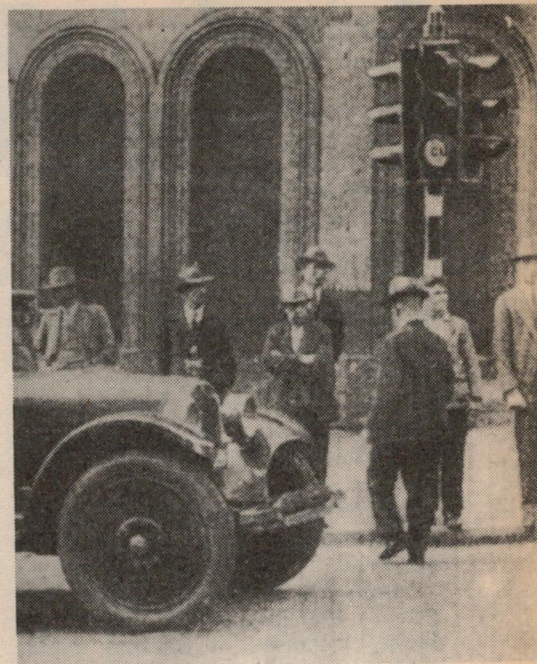

*Sydney's first traffic lights were at the intersection of Kent and Market streets. They commenced operation on 13 October, 1933. (DMR photo.)*

improvement, but still left much to be desired. In practice, it transpired that the actual traffic flow never seemed to really fit the program selected for it. And a sudden unpredictable event, such as a thunderstorm over the beachside suburbs on a Sunday afternoon, could catch the system napping.

Such a system was used in Sydney in the early 60s and, within the limitations already discussed, did a good job at the time. But, as traffic density increased, these limitations became more serious, and those concerned looked for a better way to make maximum use of the limited road capacity.

### **Co-ordinated systems**

The result was our present day system, called SCATS — the Sydney Co-ordinated Adaptive Traffic System. It was developed by a team of traffic control and electronic engineers from the NSW Department of Main Roads and is claimed to be the most advanced system in the world. Proof of this is that other states and other countries have introduced systems based on it.

At the time of writing, SCATS (under different names) has been installed in Wollongong, Newcastle, Melbourne, Adelaide, Perth, and Canberra. Overseas it has been installed in part of Auckland, New Zealand, and a modified system derived from it is in operation in Kuala Lumpur, Malaysia.

The two operative words in the above title are "co-ordinated" and "adaptive". The co-ordination concept has already



# Sydney's traffic light system

been mentioned and the adaptive is almost self explanatory; the system is designed to adapt automatically to changing traffic patterns.

The first approach to a co-ordinated adaptive system was made in 1964, when a TV monitoring system was first introduced into the central business district. The system used a variation of the fixed traffic program concept, the variation being that the officers in the control centre were provided with controls with which they could vary the pattern, according to the conditions they observed on the TV monitors.

The result was a manually operated adaptive system which was reasonably successful, at least initially. Unfortunately, as more traffic lights were brought into the system, and traffic density increased, it became unduly cumbersome. But the effort wasn't wasted; it gave rise to the concept of doing the same job using a computer rather than human operators and, from this, the modern SCATS concept was born.

The computer concept was first implemented around 1970, first with a small group of traffic lights, then progressively expanded until, by about 1975, all the central business district was under its control. Since then it has been expanded to cover the whole of the metropolitan area.

The control centre is in the State Bank Building in Oxford St, Sydney. The most visually impressive part of the centre is a bank of some 32 television screens, fed from a similar number of cameras mounted at strategic points around the city — usually well up on the side of buildings — plus a few from selected suburban sites.

Facing these screens are seven control consoles housing a wide range of operator facilities. Among these is a TV screen on which the operator can display the same image as on any of the 32 screens around the wall. And, with a joystick control, he can pan or tilt the camera, as well as zoom in or out for wide angle or closeup shots.

Two of the suburban cameras are located at bridges; one at the Tom Ugly's Bridge across the George's River, and one at the Ryde Bridge across the Parramatta River. Both these bridges are narrow by modern standards, having only three lanes, and have to be

*The Sydney metropolitan area covered by SCATS showing the regional master computers and the areas each one covers. Note also the City Business District (C.B.D.) and the main computer centre. (DMR map.)*

switched to give two lanes to major traffic flow.

Because of the distances to these cameras, and the high cost of dedicated coaxial cables, they use a slow scan system giving a new picture every eight seconds. This can use an ordinary low-cost telephone line. In spite of its limitations, the system is adequate for this particular application.

But, impressive as the TV system is to look at, it now plays a relatively minor role in the overall traffic control system. Its main use is to detect blockages caused by breakdowns, accidents, parking violations etc. When such a blockage is detected immediate steps are taken by either the Department, using its own towing vehicles, or by private tow-truck operators on contract, or by the police where this is appropriate.


## Computer control

The real heart of the SCATS system is a complex network of regional master computers distributed throughout the metropolitan area. The whole system is


divided into 12 sections, one for the city's central business district, as already described, and 11 throughout the suburbs. Each has its own master minicomputer, that for the central business district being at the Oxford St control centre, and the suburban ones in convenient buildings or blockhouses more or less central to the controlled area.

An interesting point about the system as a whole is the amount of information which can be derived from the vehicle detectors. While their primary purpose is to indicate that a vehicle is waiting at a traffic light, they can also indicate the traffic density, from the number of activations in a given time. The approximate speed at which the traffic is moving can also be determined, based on the space (time) between vehicles, since slow moving traffic tends to bunch and fast moving traffic to open out.

The 11 suburban systems are all autonomous, and work independently of adjacent systems. Each regional master minicomputer may control up to 120 sets of lights. At each set of lights there is a site controller, the familiar grey cabinet usually located on a nearby footpath. Each site controller contains a microprocessor which is linked by a

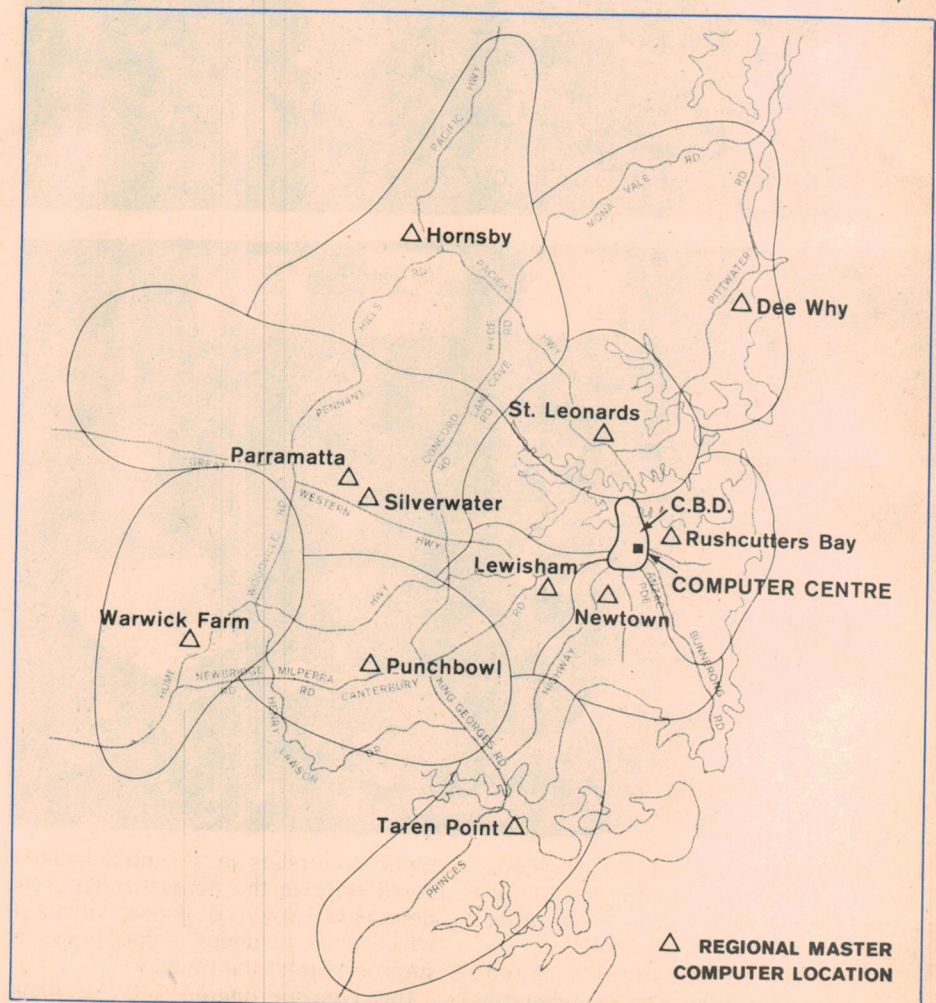



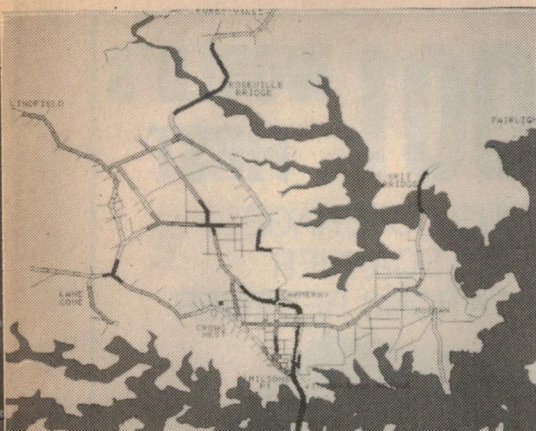

A regional map as drawn by the computer graphics system. It shows the St Leonards region (see main map) and includes the Sydney Harbour Bridge in the bottom centre of the picture (DMR photograph).

Telecom line to the regional minicomputer.


By processing the raw data from the vehicle detectors and pedestrian pushbuttons on the spot, the microprocessor produces a much simplified signal for the regional minicomputer. The microprocessor also generates the various traffic light phases, but initiates them on instruction from the regional master.

Incidentally, the modern vehicle detector is an inductive loop buried in the roadway. The pneumatic type detector was used until about 1968, when the Department introduced the first inductive loops which have gradually taken over since then. They have the advantage that, being buried, they suffer no wear and tear or damage from passing traffic.

The use of on-site microprocessors also makes for a much simpler system, particularly in regard to communication links between the signal site and the regional master. As it is, this can be a single telephone pair whereas, without on-site microprocessors, it would probably need about six pairs, plus a lot of relays and similar equipment.

Each region is divided into a number of sub-systems, consisting of one major intersection and anything from one to 10 minor intersections adjacent to it. These are permanently programmed to work as a co-ordinated group and, under light or moderate traffic conditions, each group operates independently of every other group.

However, under heavy traffic conditions the system automatically "marries" two or more groups to provide a larger co-ordinated network programmed to favour the major traffic flow and clear it as effectively as possible.

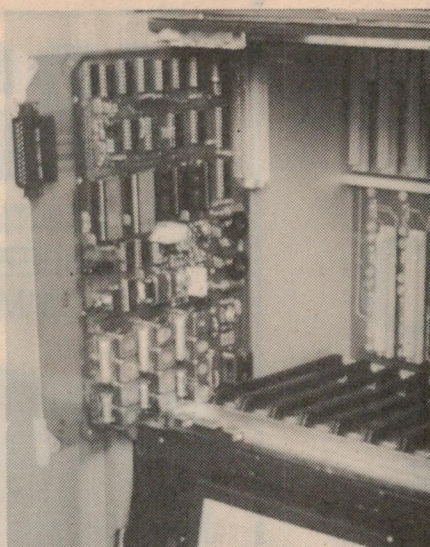

Interior view of an on-site controller, adjacent to a set of traffic lights.

## Failure modes

One risk with a system like this is the possible loss of the line between the on-site microprocessor and the regional master. This could create a chaotic situation, particularly if it involved a major intersection at peak hours. To cope with this, each microprocessor has an alternative mode of operation, called the "fallback" mode. There are several fallback modes, and each site is programmed with one suitable for its location.

For a major intersection, a "fixed time" mode would be employed. This is a prepared program based on the time of day, day of the week, and the average traffic pattern at that time, derived from regularly measured trends. On the other hand, an adjacent minor intersection, involving occasional entry from a side street, would probably fall back to a simple vehicle actuated mode.

When the regional master detects such a line failure, it will make one of several possible decisions, depending on the grade of intersection involved and the fallback mode which it knows it will employ, as well as the traffic density at that time. For the minor intersection just described it would typically do nothing, apart from signalling the failure to the control centre.

For a major intersection, it would typically switch all other major intersections to the same fallback mode, thus co-ordinating the system to the same fixed program (each microprocessor is controlled by a highly accurate clock). Even though the fixed program is less effective than the adaptive program, it is a good deal better than a total failure, and will keep the traffic moving.


Earlier we mentioned two three-lane

# "HEY"

When you're in the market for a car you head for "Auto Alley" —

For you, the electronic enthusiast, tradesmen, hobbyist or just an electronic Nut, we've created "Silicon Alley" — better known as York Street. So no matter what you need in electronics, drop your soldering iron and come on in. (OOP'S switch it OFF first)

## SINCLAIR SPECTRUM HOME COMPUTER



Sinclair ZX Spectrum-16K RAM	\$ 299.00
Sinclair ZX Spectrum-48K RAM	399.00
Sinclair ZX Printer	169.00

## HARDWARE

Spectrum 16k	299.00	Microdrive Blank Cartridges	
Spectrum 48k	399.00	Pack of 4	69.00
Ram Upgrade Kit	110.00	RS-232 Leads	49.00
ZX Printer	169.00	ZX 2 Interface	79.00
Printer Paper Pack		ZX 2 Cartridges	39.00
5 rolls	25.00	Ingersoll 35cm RGB	
Spectrum Microdrives	149.00	Colour video monitor	594.00
ZX 1 Interface	149.00		

## SOFTWARE

Biorhythms	22.50	Club Record Controller	22.50
Space Raider	19.50	Embassy Assault	19.50
Chess	25.00	Cyrus-Is-Chess	27.70
Planetoids	19.50	ZX Forth Language	44.00
Flight Simulation	25.00	Small Business Accts	39.00
Backgammon	19.50	Hungry Horace	19.50
Vu-file	27.50	Horace Goes Skiing	19.50
Vu-calc		Horace and the Spiders	19.50
Spreadsheet	25.00	The Hobbit	44.00
Vu-3D Graphics	25.00	Flippit	27.70
Adventure A, Planet of Death	22.50	Chequered Flag	22.50
Adventure B, Inca Curse	22.50	Cattel IQ Test	38.10
Adventure C, Ship of Doom	22.50	History 1	22.50
Adventure D, Espionage Island	22.50	Inventions	22.50
Reversi	25.00	Music 1	22.50
Collectors Pack	22.50	English Literature	22.50
		Zeus Assembler	38.10
		Monitor/Disassembler	38.10
		Penetrator	22.50

## EDUCATION

### NEW RELEASES

### RETAIL INC

• Cargo	33.00	• Learn to Read 5	35.00
• Glider	33.00	• Early Punctuation	26.00
• Survival	33.00	• Speech Marks	26.00
• Magnets	33.00	• The Apostrophe	26.00
• Learn to Read 1	35.00	• Capital Letters	26.00
• Learn to Read 2	35.00	• Castle Spellorous	26.00
• Learn to Read 3	35.00	• Alphabet Games	26.00
• Learn to Read 4	35.00	• Micro-Prolog	83.50

## LOOKING TO BUY A MULTIMETER?

### NEW MODEL FROM PARAMATERS

(INCLUDES A 12 MONTH WARRANTY)

### MODEL 7040



Low Cost • 3 1/2 Digits • 0.1% Basic DCV Accuracy • 28 Ranges • 2000 Hour Battery Life • Hi-Lo Volt Resistance Tests • Overload Protected on All Ranges • Current Ranges to 10 Amps.

**\$99.00**

These are just a few of the many 100's of up-to-date Electronic items on display at:



**DAVID REID ELECTRONICS LIMITED**

127 York Street, Sydney, 2000  
or Telephone (02) 267 1385



For around  
**20%**  
of what you would  
expect to Pay...



... the KoalaPad Touch Tablet gives you total cursor control, simply and completely.

Simply... because the KoalaPad tablet needs no additional hardware to work with your Apple, Atari, IBM, or Commodore computer. Just plug it in, load either a special KoalaWare program or one of many conventional game or educational programs. And you're ready for a whole new dimension in personal computing.

Completely... because the 4"x4" pad functions as a precision input, pointing and sketching device. Available software defines the pad surface to serve as special keys and multi fire buttons. Allowing you to play games with speed and accuracy.

A whole new dimension will unfold with the KoalaPad Touch Tablet the friendliest innovation in personal computing. Distributed throughout Australia by Ozi Soft Pty Ltd and available now from your local computer dealer.

**Ozi Soft**™

Trade enquiries: 33/8-24 Kippax Street,  
Surry Hills. 2010. Telephone (02) 211 1266.

IMAG2041

# AR2001 WORLD'S FIRST

- CONTINUOUS COVERAGE
- THREE MODE SCANNER
- COMMUNICATIONS RECEIVER



ONLY \$599  
INCL. TAX

## FEATURES:

- 25-550 MHz continuous
- NBFM — for communication
- WBFM — for BC & TV monitoring
- AM — for Air band monitoring
- 20 CH memory
- Priority Channel
- Clock

## SPECIFICATIONS:

Frequency Range:	25MHz-550MHz Continuous		
Search Frequency Increments:	5KHz. 12.5KHz. 25KHz		
Mode:	Narrow band FM Wide Band AM		
Number of Memory:	20 including		
Sensitivity:	Narrow FM	0.3uV	12DB SINAD
	Wide FM	1.0uV	12DB SINAD
	AM	0.5uV	10DB S N
Selectivity:	NFM	7.5KHz @6DB.	20KHz @70DB
	WFM	50.0KHz @6DB.	250KHz @60DB
	AM	5.0KHz @6DB.	10KHz @70DB
Spurious and Image rejection	50DB		
Modulation Acceptance:	NFM	7.5KHz	
	WFM	50KHz	
IF Frequencies:	1st IF 750MHz	SAW Filter	AM 100%
	2nd IF 45.0275MHz	Crystal Filter	3rd IF 455KHz Ceramic Filter
Reference Oscillator	(Synthesiser) Crystal Controlled		
Scanning Rate	Approx 5 Channels per Second		
Search Scanning Rate	Approx 6 Seconds per mega-Hertz		
Scan Delay:	Normal.		Approx. 1 second
	With Delay Option		Approx. 2.5 seconds
Search Delay:	Approx. 2.5 seconds		
Priority Sampling Rate	Approx. 2 seconds		
Audio Output:	1W @10% or less Distortion		
Speaker (Internal):	8 Ohms		
Power Requirements	12V-14V DC		
Frequency and Message Readout	LCD Type		
Size:	138mm Wide x 80mm High x 200mm Deep		
Weight:	1.1 kgs		

DEALER ENQUIRIES WELCOME

**EMONA electronics**


All Mail to: P.O. Box K21, Haymarket, N.S.W. 2000.  
Ph: (02) 211 0531 92-94 Wentworth Ave, SYDNEY, 2000  
MELBOURNE: GFS ELECTRONIC IMPORTS Ph: (03) 873 3777





A view from inside the DMR helicopter, showing the northern approach to the Bridge, and the Opera House. The officer is operating a computer terminal with a radio link to the control centre. (Philips Industries photo.)

Another computer graphics map, this time of a single intersection, also in the St Leonards region. This shows each vehicle detector (numbered rectangles) and indicates its status by colour. (DMR photo.)

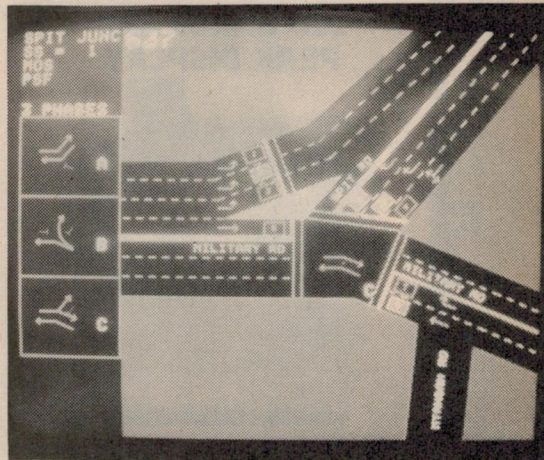

## Sydney's traffic light system

bridges in Sydney's suburbs, one at Ryde and one at Tom Ugly's Point. These can present serious bottlenecks in some peak periods, and the system is programmed to make the best use of their capacity.

The problem is not so serious when there is a predominant flow in one direction. The system simply gives it two lanes and leaves it to the traffic to make the best of it. The real trouble occurs when there is an approximately equal and heavy flow of traffic in both directions, both probably wanting to move at a faster rate than one lane can accommodate.

The approach to this situation is to alternately transpose the one-lane/two lane configuration at frequent intervals — possibly as short as five minutes — so that, on average, each traffic stream is given the equivalent of one-and-a-half lanes. Traffic may still bank up, if it is heavy, but at least the best use is being made of the bridge capacity.

Each regional minicomputer is connected by a telephone line to the control centre in Oxford St. Among other things, this provides a means of monitoring the instantaneous status of that minicomputer, or any individual set of lights connected to it. The information may be displayed in two ways; in tabular form on the console's visual display unit, or as a map.

### Computer graphics

The maps are generated by computer graphic systems and are displayed, in colour, on one of four graphic display sets suspended from the ceiling above the console. The maps can be drawn to three scales: a complete region, a sub-system, of a single intersection. On a

regional display, colours are used to indicate the state of the traffic on major roads; from green for light traffic, through yellow and orange, to red for congestion. Purple signifies that a number of sub-groups have been "married", as previously explained.

Maps for individual intersections show the names of the streets, the location of each vehicle detector loop, and its current status; ie, green if the loop is clear, red if it is activated. When traffic is flowing the frequency with which vehicles activate these loops as they pass over them, the time they take to pass over them, and time between activations provide, collectively, a very good indication of the traffic density and speed.

The regional minicomputer will also raise an alarm at the control centre in the event that a set of signals fails, for any reason. The nearest signals repair team is then directed to the site.

The circuit from the regional minicomputer to the control centre works the other way as well. With it, an operator can override any part of the system down to an individual set of lights. This facility is not normally needed, except in emergencies. Typical would be a major traffic accident requiring ambulance, fire brigade, and police vehicles to reach the scene as quickly as possible.

In such a situation the TV monitors would be used to supervise the city area or, outside this area, a police motor cycle escort may accompany the emergency vehicle, using its two-way radio direct to the control centre to report its approach to each intersection.

Another feature involves the Department's helicopter, which carries a

computer terminal on board, and can, if necessary, directly control an individual intersection via a radio link to the control centre. Again, this would be used only in very special circumstances.

And how effective is the system in practical terms; in moving traffic faster and with fewer stops? Surveys conducted by the Department indicate that, compared with an unco-ordinated system, on a typical urban arterial road, SCATS reduces travel time by 23%, vehicle stops by 46%, accidents by 20% and fuel consumption by 12%. This last figure represents a saving of 60,000 litres of fuel per year for each set of lights.

All of which adds up to a very effective system. The important point about it is that the system itself makes all the decisions, with virtually no human intervention. Such human intervention as does occur is largely supervisory, or to take over in an emergency, such as traffic accidents, faulty or damaged traffic lights etc. As a computer system capable of coping with widely varying conditions, and making "intelligent" decisions to suit, it represents a really significant achievement.

So next time you are halted by a red light, try not to be too impatient; there is a lot of equipment, with a lot of planning behind it, designed to make sure that you get your share of the roadway in the shortest possible time.

In conclusion, the author would like to thank the Department of Main Roads, NSW, and in particular Mr John Longfoot, Engineer Manager, Traffic Control and Emergency Centre, for their co-operation in the preparation of this article.




# QUALITY ALTRONICS PRODUCTS

**\* TOLL FREE PHONE ORDER SERVICE (008 999 007)**

**\* NEXT DAY JETSERVICE DELIVERY** READ ON! ➔

## LED BARGRAPH PEAK DISPLAY

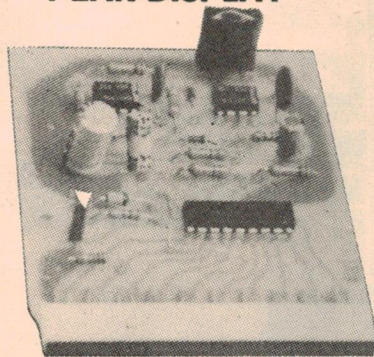

This easy to build level meter uses our exclusively imported LED bargraph module which gives it a very professional finish indeed. Indicates from -21dB to +6dB using a logarithmic scale. **Great Value!**

K 5412..... **\$16.50**

## FERRIC CHLORIDE BEADS 200g

200 gram pack makes 1 litre — a powerful fast etching solution.



H 0800 **\$1.95**

**WAS \$199  
SAVE \$74**



**ONLY \$125**

## FAMOUS VOYAGER CAR COMPUTER

AS REVIEWED  
EA OCT '82 P26-28  
ETI NOV '82 P26

**COMPLETELY  
BUILT AND TESTED**

MADE IN ENGLAND! — QUALITY!

Contains equivalent of thousands of transistors — uses massive custom LSI chip to achieve low price.

Never before has such a comprehensive car performance computer been offered at such a low price! Once again miracle microprocessor technology has enabled us to pass enormous savings on to you!

But don't let the low cost fool you. The "Voyager" car computer is the most comprehensive product that we have seen. No other car computer matches this one at even twice the price! You could buy a \$20,000 Holden and not get a better car computer!

Just check the features. We are sure that you will calculate that the "Voyager" represents outstanding value!

**FEATURES:** ★ Instant fuel consumption in litres/100km and MPG! (most others have only one of the above) just switch from one to the other as you drive along. ★ Instant speed, time and other fuel data. ★ Visual and audible excess speed alarm.

**INSTALLATION:** The "Voyager" comes complete with an unbelievable array of mounting configurations, on dash, under dash or stalk mount. All installation hardware is supplied (even a roll of insulation tape!) as well, of course, as the speed and fuel sensors. A lavishly illustrated installation manual is provided as well as a comprehensive operators manual.

## MICROWAVE OVEN LEAK DETECTOR



### ETI PROJECT

Completely passive project receives microwaves via an antenna which develops a voltage across a detector diode driving the meter.

Monitor your microwave oven with this easy to build kit. All components mount on single PCB, including the meter.

Genuine Hewlett Packard Hot Carrier Diode supplied.

K1724..... (still only) **\$14.50**

## PC BOARD — BLANK


Single sided copper clad.

H 0750 75 x 150 **\$1.25**  
H 0751 150 x 150 **\$2.50**  
H 0752 300 x 300 **\$4.50**

## DALO PEN ETCH RESISTANT INK.


• Simply mark tracks directly on to copper board  
• Allow to dry • Then etch in ferric chloride bath

Makes PC artwork a breeze.



T 0033 .. **\$2.50**

## SHEETMETAL NIBBLING TOOL



Cuts any shape cut out in steel, aluminium or plastic. Very easy to use.

Capacity steel .6mm. Aluminium 1.6mm.

**SENSATIONAL  
VALUE AT**

**\$16.95**

T 2355


## THE DAZZLING MUSICOLOR IV PROJECT



Combination Colour Organ and Light Chaser. Four channel colour organ. Internal micro-phone or connect to speakers for colour organ operation. (The lights connected to each channel pulse in beat to the music proportional to portion of frequency spectrum concerned.) Four chaser modes forward and reverse. Output lamp load capacity a massive 2400 watts — that's 100 party globes. Full instructions and every last nut and bolt included. Great for parties, shop signs, display windows etc.

K5800 ..... **\$89.50**

## ALCOHOL BREATH TESTER



K1583  
**ONLY**

**\$29.95**

(SEE EA  
MAY 1983)

This Great new Kit from EA will be a smash hit with all the smashed people at your next party. Fun to build, Fun to calibrate and Fun to use. More seriously, this unit could save lives.

## INSTRUMENT KNOBS COLOURED CAPS


See our catalog for our full range of superb Instrument Knobs — Haven't got our Cat! — Send \$1.00 for P+P today!

H 0001. . . Red  
H 0002. . . Blue  
H 0003. . . Green  
H 0004. . . Yellow

**60c each  
10 UP . . . 55c**



## IC SOCKETS DIL LOW PROFILE



P 0550 8 Pin  
P 0560 14 Pin  
P 0565 16 Pin  
P 0567 18 Pin  
P 0568 20 Pin  
P 0569 22 Pin  
P 0570 24 Pin  
P 0575 40 Pin

ea.	10+	25+
.18	.15	.10
.20	.18	.15
.20	.18	.15
.30	.25	.20
.50	.45	.42
.60	.50	.47
.45	.40	.35
.65	.55	.45

**SAVE A  
FORTUNE**





**\* 14 DAY MONEY BACK SATISFACTION GUARANTEE**  
**\* ALL AT DIRECT IMPORT ALTRONIC PRICES**  
**DICK SMITH — EAT YOUR HEART OUT!**

**PROFESSIONAL QUALITY  
SOLDER SUCKERS**

Not to be compared with inferior "Hobby types". Saves countless hours in fault finding and repair of complex PCB's.

- SINGLE HANDED OPERATION
- SELF CLEANING PLUNGER
- LONG LIFE TEFLON TIP
- DOUBLE DIAPHRAGM, DUAL O-RING SEAL
- 225mm x 20mm(d) 50mm STROKE
- POWERFUL SUCTION



**NOW \$7.50**

T1240... only **\$11.95**  
 T1241. Replac tip. **\$1.95**

**SOLDER**


200 gram reel, 1mm universal gauge. Suitable for all types of electronic soldering. Resin cored and includes bit saving additive.

T1200 **\$4.95**   **5 UP \$4.50 ea**

**LOOK AT THIS**

**INCREDIBLE SAVINGS**  
**On our Super Popular**  
**National Semiconductor**  
**Data Books**

**SAVE A MASSIVE 40%**

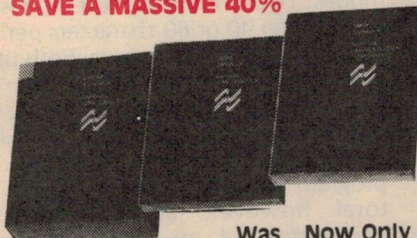

Was Now Only

B1010 LINEAR DATA VOL 1... **\$12.50 \$6.50**  
 B1011 LINEAR DATA VOL 2... **\$12.50 \$6.50**  
 B1015 LOGIC DATA ..... **\$ 9.95 \$8.50**  
 B1030 CMOS DATA ..... **\$11.50 \$8.50**

**BUY THE SET FOR ONLY... \$28**

**LESS THAN \$20**

**\* 370° FIXED TEMPERATURE \* IRON CLAD SOLDERING TIP**

**20W MICRON IRON**


**\* SUPER COMFORTABLE NEOPRENE FINGER GUARD**


- 240 volt
- 370° Fixed Temperature
- High Efficiency patented Heating Element
- Iron clad, chrome plated, long life interchangeable tips.

**WHY PAY OVER \$40?**



T2420..... **\$19.50**  
 Comes supplied with T2420 tip.

**REPLACEMENT TIPS** ..... All one price... **\$2.95**

Micro chisel  
 T 2423..... 1mm 

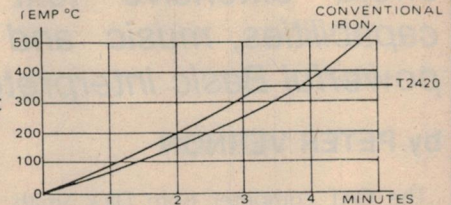


**HEAT UP AND RECOVERY**

Mini chisel  
 T 2424..... 1.5mm   
 Standard chisel  
 T 2425..... 3mm 

**THESE SUPERB TEST EQUIPMENT KITS ALL NOW INCLUDE OUR BRILLIANT H 0480 INSTRUMENT CASE.**

**FUNCTION GENERATOR**



The most essential piece of test gear second only to a good multimeter on any hobbyist's bench is some kind of audio signal generator. This design utilizes the latest circuit techniques to produce stable, low distortion waveforms.

A truly versatile unit at a bargain price.

- 4 digit frequency readout (eliminates tiresome dial calibration) — typical accuracy ± 2% — 3 overlapping ranges x1, x10, x100 — 500 OHM Nominal Output — continuously variable 3MV — 2.5V P-P
- Distortion — sine wave — less than 0.7% @ 1KHz
- Linearity — triangle wave — better than 1% @ 1KHz
- Squarewave rise time — 6V/μs maximum output
- Amplitude stability — better than 0.1 dB on all ranges.

With the exception of the display all components mount on a single PCB making this kit suitable for all constructors.

K2505..... **\$85.00**

**DIGITAL CAPACITANCE METER**



with Deluxe Instrument Case

**NEW DELUXE FINISH**  
 We are pleased to announce the release of the Digital Capacitance Kit housed in our Deluxe H0480 ABS Instrument Case.

This superb Test Instrument Kit now compliments our top selling Digital Frequency Counter and Function Generator Project Kit. Electronics Australia Project Measures capacitance of both polarized and non-polarized capacitors from 1 picofarad to 99.99 microfarads in 3 ranges. Check values of unmarked capacitors, especially those little trimmers that are never coded. Select precise values for filters and timing networks within ease.

**EXCLUSIVE TO ALTRONICS**  
 Each kit includes precision measured capacitors for accurate calibration of each range.

K2521..... **\$55.00**

**7 DIGIT FREQUENCY COUNTER**



**UNBELIEVABLE 0.005% ACCURACY**

- Frequency and Period measurement to 500 MHz (with optional prescaler)
- High Input sensitivity. Professional unit at a fraction of the cost of built up units.
- IC sockets provided throughout
- Low age rate 10,000 MHz XTAL
- Quality ABS plastic case with deluxe Front panel
- Specified LSI

K2500..... **\$119.50**

PRESCALER K2501..... **\$26.00**


DECIMAL POINT K2502..... **\$7.50**

**EASY READING GUIDE TO CP/M 2.2**

As a learning tool — IT'S INVALUABLE  
 As a Reference — IT WILL TAKE PRIDE OF PLACE NEXT TO ANY CP/M SYSTEM

**B9080... ONLY \$41.95**

Devoted primarily to CP/M 2.2 this manual is equally applicable to most other CP/M systems. Cortesi divides the book in two sections, an absorbing, explanatory, tutorial covering setup and operating procedures and a comprehensive reference section.

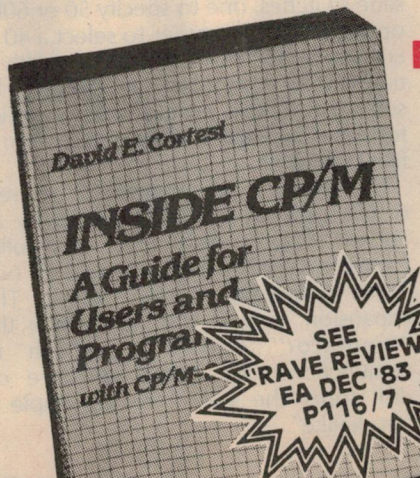

**SEE "RAVE REVIEW" EA DEC '83 P116/7**



# *Electronics Australia reviews the* **Cat Computer**

## **Apple compatible plus extensive graphics**

*Dick Smith Electronics has come up with a winner with the CAT personal computer, a system which offers extensive text and graphics display capabilities, music and sound effects, and a powerful Basic interpreter.*

by **PETER VERNON**

The CAT computer from Dick Smith Electronics is actually two machines in one. In itself it is similar to the Apple II but provides enhanced display capabilities and sound effects and a more extensive Basic interpreter. With the addition of an extra-cost emulator cartridge and disk drive the CAT becomes an Apple II "workalike", able to run most Apple II software.

Manufactured by Video Technology Limited of Hong Kong, the CAT is a big, heavy "all in one" unit with processor, memory and interface electronics packaged in the keyboard console. Dimensions are 486 x 248 x 65mm (W x D x H at rear), sloping to 45mm high at the front of the console. The colour scheme is beige and tan.

A 55 key alphanumeric keyboard and an 18 key numeric pad are provided, along with eight double-size function keys which in conjunction with the SHIFT and CTRL keys give 24 programmable functions. The keyboard is "dished", with the top surfaces of the keys arranged in a concave plane for comfortable typing, and special function keys are picked out in yellow and tan.

Automatic repeat operates on all alphanumeric keys and the programmable function keys are initially defined to allow single-key entry of commonly used Basic statements such as LIST and RUN.

One minor irritation is the positioning of the RUBOUT key above the RETURN key. It is a little too easy to reach for the RETURN key and instead delete a character accidentally.

At the rear of the console is an array of controls and connectors. From left to right (looking from the rear) are the

rocker type power switch, an IEC socket for 240VAC power, a reset button, colour defeat switch, RGB output, composite video output, cassette interface connector, volume control for the internal speaker, a connector for an add-on RS-232C interface, system bus connector and a parallel printer port. An external RF modulator is also available.

The connector at the rear of the CAT console provides an audio output as well as composite video, while when using an RF modulator sound is heard from the speaker of the television set, in addition to the CAT's internal speaker (depending on the setting of the volume control). The "colour defeat" switch eliminates the chroma component of the video signal to provide a clearer picture when the CAT is used with a monochrome monitor.

Additional connectors on the right side of the console are for an expansion interface and a 9-pin D type socket for dual joystick controls. Tucked away underneath the console are two small slide switches, one to specify 50 or 60Hz operation and the other to select a 40 or 80 column display format. The width of the display can also be changed by software — the switch selects which format is operative when the system is first turned on.

The system bus connector at the rear of the console is normally used by an add-on floppy disk drive controller cartridge which allows the use of two 13cm minifloppy disk drives. The expansion port at the right takes the "emulator" cartridge, which in conjunction with special software on disk turns the CAT into an Apple II "workalike".

Given the recent furore over the "Wombat" computer, and the on-going debate about software protection sparked by Apple Computer's attempts to defend its investment, compatibility with the Apple II is no light claim. Prompted by Dick Smith Electronics, the manufacturers of the CAT have gone to some lengths to ensure that Apple copyright (if any) has not been infringed.

### **Features of the CAT**

High resolution (560 x 192) graphics in six colours and bit-mapped 280 x 192 graphics in eight colours, a choice of 40 or 80-column text display in upper and lower case and three-voice sound effects and music capability are the high points of the CAT's capabilities. Couple this hardware with a Microsoft Basic interpreter with support for graphics and sound and the system has a lot of potential.

The Basic of the CAT is an expanded version of that of the Apple II, which was also written by the Microsoft company. There is one notable omission, however, in that the Apple II 40 x 40 "chunky graphics" mode is not available on the CAT. Typing "GR", which on the Apple II enables this mode, causes a syntax error on the CAT.

When it is not emulating an Apple II the CAT provides five video display modes. Two of these are text modes and allow either 40 or 80 characters per line, with 24 lines on the screen. Both upper and lower case characters are supported, although program statements typed in lower case will be converted to upper case when the program is listed. The conversion is not total however, as some of the parameters of program statements remain in lower case and will cause a syntax error when the program is run.

As well as converting all keywords to upper case the Basic interpreter automatically inserts spaces between statements and symbols, making program listings easier to read, although a little disjointed at times.

Using the WIDTH statement the text display can be formatted with any line





length between one and 80 characters, with displays of over 40 characters per line using a special half-size character set. On an inexpensive colour video monitor or converted television set there is not sufficient bandwidth to make these characters legible, and a wider bandwidth monochrome or RGB colour monitor is required to make this display mode useful.

The colour of characters, screen background and border can be altered with the TEXT statement, which takes three parameters, one for each colour selection, chosen from a range of eight.

Colours can also be swapped between characters and background with the INVERSE statement, although some colour combinations are unreadable on a low resolution monitor. Messages on the screen can also be highlighted with

the FLASH statement, which causes text to alternate between INVERSE and NORMAL modes.

In addition to two text modes, the CAT has three graphics modes. The first is an Apple-compatible  $280 \times 192$  resolution display in six colours (including black and white) but the effect of a colour specification varies according to the exact position of a pixel on the screen. Pixels in even-numbered columns are always either blue or magenta while pixels in odd numbered columns are either red or green. Two adjacent pixels, however, are always shown as white.

A second version of this same mode is also available, which limits vertical resolution to 160 points but allows four lines of text to be displayed at the bottom of the graphics screen.

The same resolution with more

colours, is available in a "bit-mapped" mode which is not derived from the Apple II. This mode also has a resolution of  $280 \times 192$  but allows eight colours, with no limitations on how colours are mixed on the screen. Two pixels placed next to each other will retain their individual colours.

A "double resolution" mode is also available, allowing displays of  $560 \times 192$  pixels. Colour combinations are the same as for the Apple-compatible  $280 \times 192$  mode display mode.

In practice, the bit image graphics mode results in the most pleasing displays. The limitations on the use of colour imposed by low and double resolution modes mean that the colour of an arbitrary line cannot be guaranteed and that coloured shapes will be incomplete.



# Cat Computer

Note that except for a four line text area at the bottom of the graphics display screen, text and graphics cannot be mixed. When a graphics program does not perform as expected the computer often remains in the graphics mode, giving the user no indication of what has gone wrong. Returning to the text mode requires typing "TEXT", without the benefit of seeing what you type, or pressing Function key 4 (defined as "TEXT" by default).

We tested the CAT on a colour television set converted for direct video entry and on the same set using an RF modulator and found that there was insufficient resolution to allow the 80 column characters to be legible. Colours were also "washed out", lacking in saturation, and the fine detail of some displays was lost.

We also tried an RGB video monitor, an AMUST unit made available by Dick Smith Electronics. This monitor connects to the RGB video connector at the rear of the console, and although small (28cm diagonal, 20 x 14cm usable area) provided a far superior picture. Colour displays were bright and fully saturated and details of the picture were crisp and clear. At around \$700 though, the use of an RGB monitor adds considerably to the cost of the CAT system.

## Basic statements and functions

The Microsoft Basic of the CAT is compatible with that of the Apple II but includes extensions to enhance the capabilities of the system. Program listings intended for the Apple II can be typed in as is and will run as specified, except for the "chunky graphics" mode.

SHLOAD, DRAW, XDRAW, ROT and SCALE support the "shape table" feature. Graphics shapes defined as a series of vectors can be stored in memory and reproduced at any point on the screen in Apple-compatible high resolution and CAT "double resolution" modes. Before

drawing the shape can be rotated and/or scaled, and shapes can also be erased and re-drawn elsewhere for animated effects. Shape tables can also be saved on cassette or disk and re-loaded as required.

Points and lines can also be plotted on the screen with the HPOINT statement. A pair of coordinates as parameters to this statement sets a single point, while HPOINT with two pairs of coordinates separated by "TO" will draw a line. Multiple lines can be drawn with a single statement by adding further coordinate pairs, as follows;

```
HPOINT 0, 0, TO 279, 191, TO 0, 191  
TO 0, 0
```

The task of graphics programming is further eased by statements such as DRAW SCIRCLE, DRAW HSQUARE and PAINT. Outlines of circles, arcs, rectangles and ellipses can be drawn with a single statement with the H prefix, while equivalent statements with an S prefix draw solid shapes. The PAINT statement is also available to fill irregular shapes with colour. It takes parameters specifying the point where PAINTing is to begin, the colour to be used as fill and the colour of the boundary at which PAINTing is to stop.


In addition to the graphics enhancements the CAT offers expanded

sound effects and music capabilities. The original Apple II design allows only "single bit" sound activated by the BEEP statement. One bit of a particular memory location is connected to a small amplifier and internal speaker and is toggled on and off to create square waves with a frequency depending on the rate of switching.


While it is possible to produce music in this way, the amount of work required is out of all proportion to the effects produced. The addition of a separate sound generator chip in the CAT is therefore a welcome development to those unconcerned with Apple compatibility.

Two versions of the SOUND statement control the three channel sound generator. The first version uses numbers between 1 and 63 to specify the pitch of each note, the duration, volume and sound channel to be used. Only one channel at a time can be activated with this version of the statement.

The second version of SOUND uses letters of the alphabet to specify notes over a seven octave range. The tempo, length and volume of any note can be specified, and more than one sound channel can be activated simultaneously. Each note is specified as one of A, B, C,

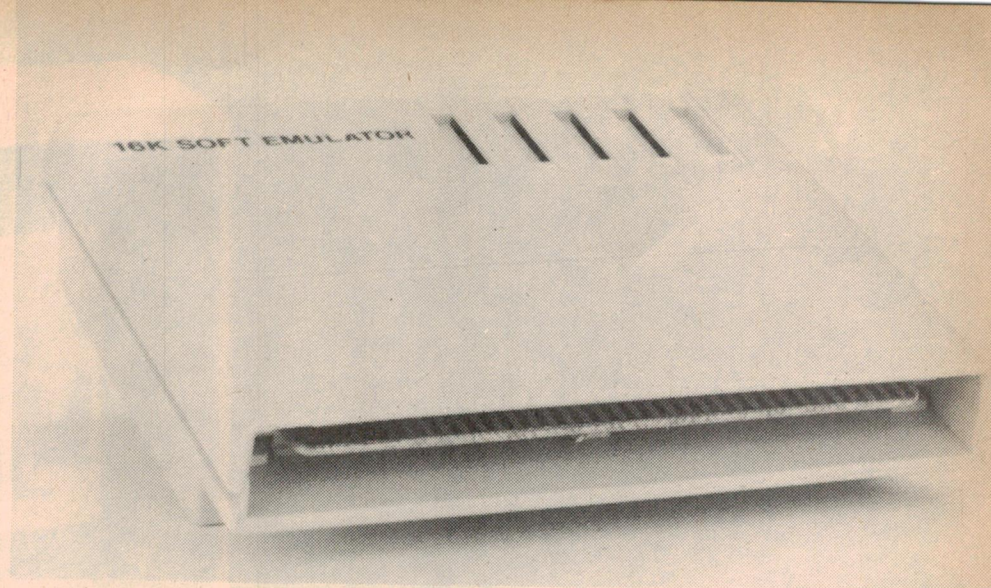


*The emulator cartridge provides 16K of RAM to store Apple-compatible software.*

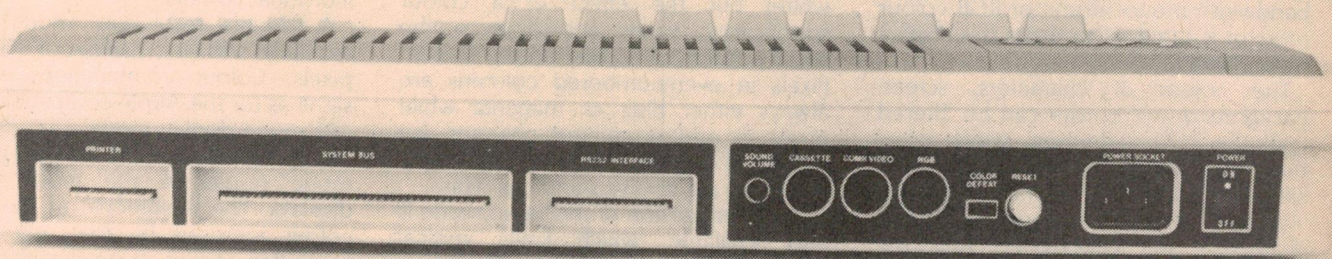

*At the rear of the CAT console is an array of connectors including a printer port, expansion bus and two video outputs.*



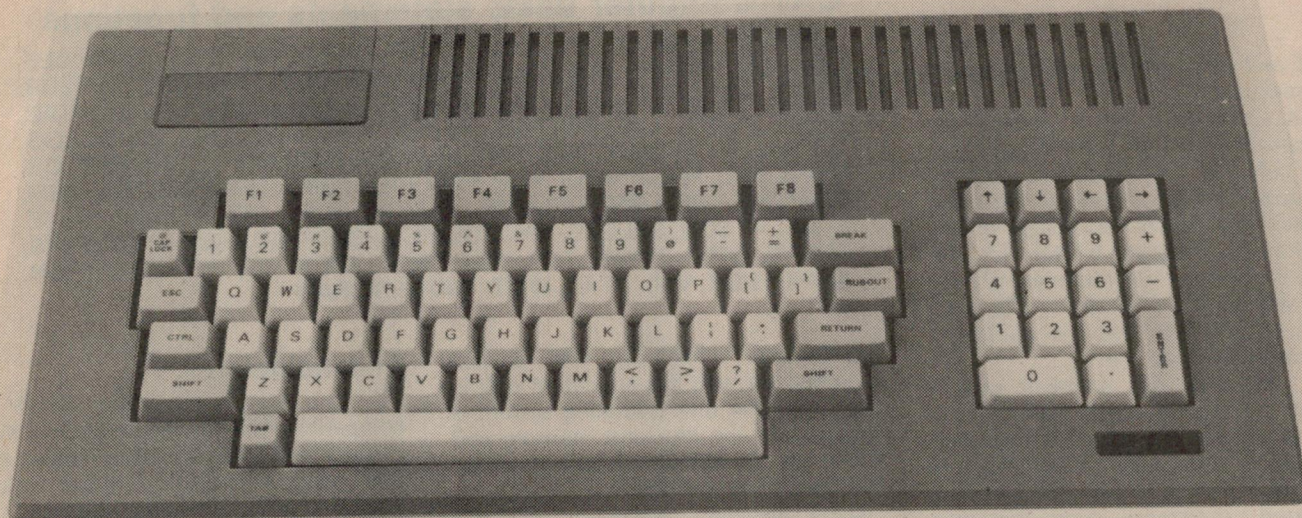

The CAT personal computer is an "all in one" unit with a keyboard and a numeric pad well-suited for prolonged use.

D, E, F, G in one of seven octaves, and optionally, as either sharp or flat.

SOUND C4 for example, produces the note middle C.

Percussion, phasor sounds and other effects can be produced with the NOISE statement, which controls a separate sound channel and allows either random ("white noise") or periodically varying waveforms with one of four predominant tones. Volume is specified as one of 16 levels between 0 (off) and 15 (maximum).

Duration of the sound is specified in increments of 1/50th second, using a parameter between 1 and 255. Longer noise effects are produced with two or more statements in succession.

Any of the graphics display pages of the CAT can be reproduced on an Epson type dot matrix printer using the Basic command PRINT SCREEN. This function is designed to work with the MX-80 and similar printers, but not the Seikosha GP-100 series, which use a differently configured print head.

Program editing features are not as extensive as those of some other machines, and appear over-complicated. They are not mentioned in initial copies of either manual accompanying the machine, but books on the Apple II are applicable. At the time of this review revised manuals were in preparation.

Variable names in CAT Basic can be up to 40 characters long, a boon to programmers who like to write self-explanatory code. All numeric variables are stored to nine-digit accuracy, and there is no provision for designating particular variables as integers or double precision.

Use of machine language routines is

## CAT specifications

Processor	6502 at 2MHz.
RAM	48K, 64K in emulation mode.
ROM	32K, partly overlaid by emulator.
Interfaces	Cassette port, games port, parallel printer port, expansion port, system bus, optional RS-232C.
Display	Text: 40 x 24 lines; 80 x 24 lines. Graphics: 280 x 192, 560 x 192.
Sound	Three voices, six octave range, programmable noise.
Software	24K Microsoft Basic in ROM; machine language monitor; Apple II compatible Basic on emulator disk.
Documentation	Under revision at time of review.

well-supported. The "Ampersand" command (&), causes a Basic program to jump to a machine language routine starting at address \$03F5 (hex). Naturally, a machine language routine must be stored in memory before the statement is used or the results will be extremely unpredictable.

The CALL statement is also available, allowing a more flexible use of machine code from Basic. CALL takes a variable which represents the (decimal) address of a machine language subroutine. The ROM-based "kernel" routines of the CAT, including a machine language monitor program, can be activated with the statement CALL -151. Machine language subroutines can also be entered with the USR statement, which causes a jump to a machine language subroutine pointed to by an address stored in locations 000A-000B.

The built-in machine language monitor program allows the contents of memory to be examined and altered and machine code programs to be entered and run, although there is no mention of this feature in the manuals accompanying the machine.

## Software and expansion

Dick Smith Electronics has tested around 400 programs for the Apple II which will run on the CAT either with or without the emulator cartridge. A list of these programs is available on request.

By far the largest proportion of this list are games programs, with the spectacular graphics familiar to admirers of the Apple II. Games such as Crisis Mountain, Zaxxon, Microsoft's Flight Simulator, Missile Defence and all the Scott Adams Adventures run without the emulator. Others such as Three Mile



# Cat Computer

Island and Olympic Decathlon require the emulator.

Note that there is at present no software available for the CAT as such. None of the commercially available programs take advantage of the extra graphics and sound capabilities of the machine. A program written for the Apple II computer will run in exactly the same way on the CAT and would need to be modified to use the additional features of the machine.

We were however supplied with a demonstration disk which highlights the special capabilities of the CAT and each computer comes with a cassette copy of the same software. Additional purpose-designed programs may become available if independent software suppliers decide that the market is worthwhile.

Hardware expansion is at present limited to the disk controller cartridge, emulator and an RS-232C serial interface. The single expansion bus connector of the CAT is required for the emulator cartridge, while the external disk controller cartridge plugs into a bus connector at the rear of the computer. The RS-232C serial interface connects to its own port at the rear of the console.

The emulator cartridge is a bank of 16K RAM which can be switched in and out of circuit. It is equivalent to the Apple "language card" or other 16K memory expansion boards, and is supplied with a disk containing the DOS and copies of two Apple II compatible Basic

## CAT Computer Basic statements and functions

ABS, AND, ASC, AT, ATN, CALL, CHR\$, CLR, CONT, COS, DATA, DEF, DEL, DIM, DRAW, END, EXP, FLASH, FN, FOR, FRE, GET, GOSUB, GOTO, HCOLOR=, HGR, HGR2,3,4,5,6, HIMEN, HOME, HPLLOT, HTAB, IF, IN, INPUT, INT, INVERSE, LEFT\$, LEN, LET, LIST, LOAD, LOG, LOMEM, MID\$, NEW, NEXT, NOISE, NOT, NORMAL, ON, ONERR, OR, PAINT, PDL, PEEK, POKE, POP, POS, PR#, PRINT, READ, RECALL, REM, RESTORE, RETURN, RESUME, RIGHT\$, RND, ROT=, RUN, SAVE, SCALE=, SGN, SHLOAD, SIN, SOUND, SPC, SPEED, SQR, STOP, STR\$, STORE, STEP, SWAP, TAB, TAN, TEXT, THEN, TO, R TROFF, TRON, USING, USR, VAL, VTAB, WAIT, WIDTH, XDRAW.

interpreters. When the CAT is first switched on with the emulation disk in the drive, the disk operating system is loaded into the emulator memory and the user is asked to select either standard or integer Basic.

Some programs definitely need the additional facilities provided by the emulator. Unfortunately for the user there is no way of determining beforehand whether a program which is not on the DSE list will need the emulator.

Even with the emulator, not all Apple II programs will run on the CAT although the odds are good. Of 140 programs tested by one Dick Smith Electronics staff member, only one was found to be incompatible with the CAT emulator combination. Those programs which make extensive calls to the lesser used machine language monitor subroutines of the Apple II give the most trouble.


Sandy's Word processor and 80 column Visicalc for example, run when the emulator is fitted, but the Zardax word processor will not.

## In conclusion

If you want a machine which is compatible with the Apple II and which is supported by a reputable retailer, the CAT with emulator is good value. Readers will have to decide for themselves whether Apple compatibility is important to them and how much effort they are prepared to put into collecting and testing software for the system.

The best points of the CAT are its quality design and presentation, colour graphics and sound capabilities and powerful Basic interpreter. Even without Apple compatibility it is a personal computer worthy of note.

The CAT computer costs \$699, with the emulator cartridge an additional \$99. A controller cartridge for two disk drives costs \$149, with half-height 13cm disk drives to suit at \$349 each. The RS-232C interface is \$129, and a pair of joysticks is available for \$34.50. An Apple-compatible CAT with one disk drive is thus \$1296 including the emulator, disk operating system and Basic.

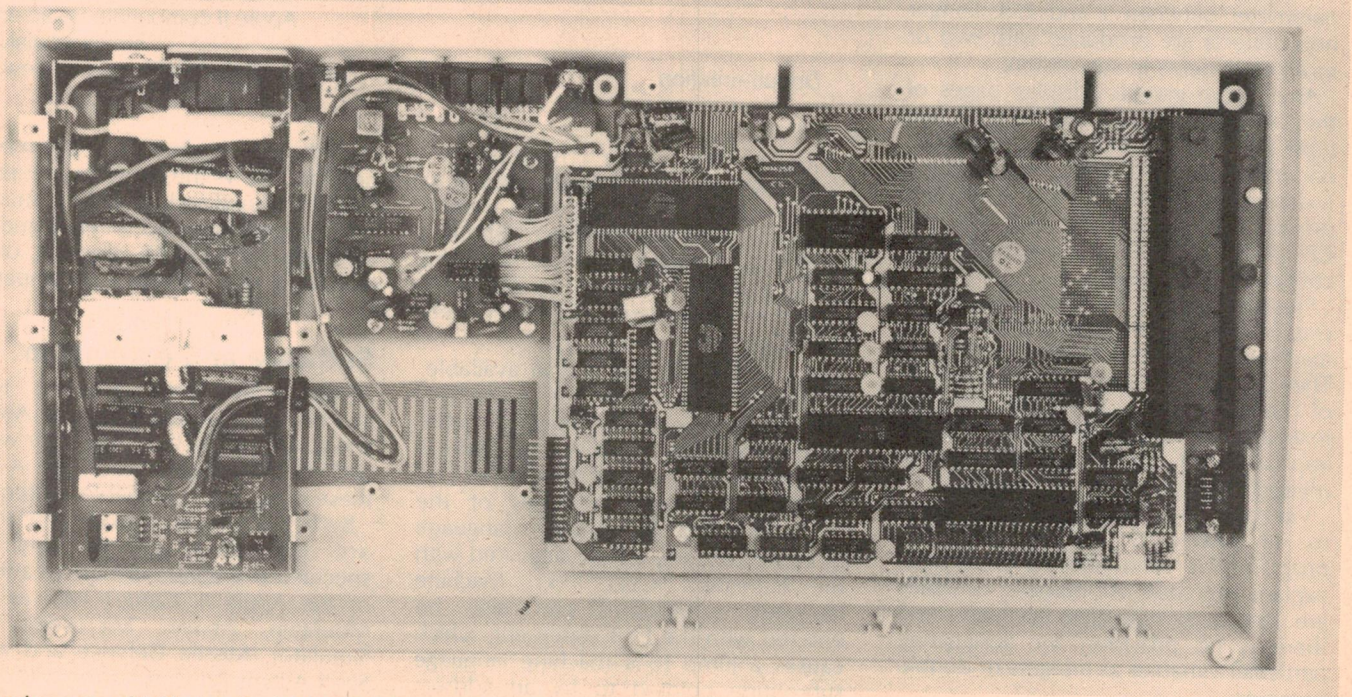

*Extensive use of LSI circuits in the CAT keeps the chip count low. Note the separate power supply board.*



# YES!


- \* WE DO HAVE STOCK OF ALL ADVERTISED ITEMS.
- \* WE DO HAVE A FAST BANKCARD MAIL-ORDER SERVICE.
- \* WE DO HAVE AN AUSTRALIA-WIDE USER BASE.
- \* WE HAVE OUR OWN ENGINEERING DIVISION.
- \* WE HAVE BEEN IN THE COMPUTER INDUSTRY FOR OVER TWO YEARS.

## CONDOR

At last it's here! — the CONDOR is fully compatible with the IBM-PC at a fraction of the price — check out the features of this fully-configured business system!


- 16 bit 8088 processor running at 4.77 MHz.
- 128K RAM—expandable on-board to 256K.
- Twin Matsushita 320KB disc drives (640KB total).
- 1 x RS232 serial communication part.
- Real-time clock with battery backup.
- Fully detachable slim-line keyboard with 95 keys including 8 separate cursor control keys.
- Centronics parallel interface.
- Graphics—320 x 200 color, or 640 x 200 b/w.
- Monitor—capable of driving RGB, color or b/w monitors.
- Comprehensive user manual.

CONDOR uses the superb MS-DOS 2.0 operating system and will run the countless packages designed to run under MS-DOS such as Lotus 1-2-3, Multiplan, Wordstar, Visicalc, DBASE II, CopyIIPC etc. CONDOR will also run CP/M-86 and associated software. Software supplied with CONDOR includes MS-DOS 2.0 (licensed by Microsoft Corp.).



SECOND SHIPMENT  
DUE EARLY MAY


**\$3490**



## MULTIFUNCTION BOARD

For IBM-PC or compatible computer

- 64K-256K RAM
- Centronics printer interface
- RS232 Port (2nd RS232 optional)
- Real time clock with battery backup
- As used in CONDOR computer

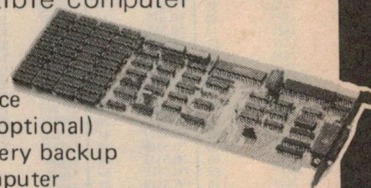


FREE — start-of-day routine to transfer real time clock to MS-DOS clock

**\$549**

## SLIM DISC DRIVES

- \* ALPS mechanism.
- \* Metal Band positioner.
- \* 13 or 16 sector.
- \* No-contact write protect.
- \* Super-quiet operation.
- \* M.T.B.F. 8000 hrs.
- \* Dimensions 60x151x250mm.
- \* Includes cable, case and manual.




Apple II compatible

UNBEATABLE VALUE AT **\$290**

## DM-1202 12" AMBER MONITOR

Finally! a full size AMBER monitor for under \$200!  
Forget that eye strain from staring at a tiny green screen.


- \* Rugged steel cabinet.
- \* Input signal:  
1 ± 0.2v pp composite video.
- \* Video response 18MHz.
- \* 12" C.R.T. 90° deflection. Amber.
- \* Highresolution — easily handles Videx 80-column.
- \* Suitable for all popular computers.



**only \$199**

## APPLE II Accessories

Z80 (CP/M) Card	\$59
RS-232 Card	\$63
Epson Printer Controller (with cable)	\$69
Disc Controller	\$54
80 Column Card	\$89
Joystick	\$19

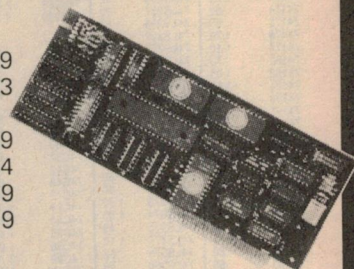


## APPLE POWER!

— has your Apple power supply given up?

THIS ONE won't!

- \* Thumping 60 watt rating.
- \* Fuse protected.
- \* No cooling fan required.

**\$89**

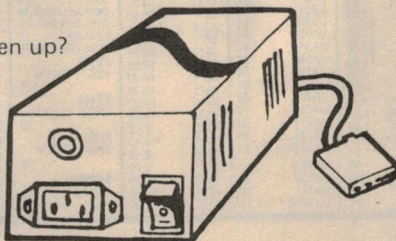

ALL PRICES  
INCLUDE SALES TAX



# Eagle

**Eagle Electronics Computer Centre**  
83 Princes Hwy., St. Peters. (cnr. Short St.)



P.O. BOX 161, ST. PETERS, N.S.W. 2044, AUSTRALIA. TELEPHONE: (02) 516 4540

Errors and omissions excepted



## MAIL ORDER

## MAIL ORDER

## MAIL ORDER

Why buy from a mail order only house  
when we have two shops for convenience  
and a highly efficient mail order service?

5% off for order over \$100  
10% off over \$500; 12% off over \$1000

7400	74L527	.40	74F139	1.58	74C373	2.60	4518	1.00	LF398	3.95	UA747	98	8292	35.00	IN4001	05	BF459	51	2N3906	20	2.2UF/63V	.19
7400	74L530	.40	74F151	1.58	74C374	2.50	4519	1.00	LF398H	6.50	UA1458	50	8293	25.80	IN4002	05	BF469	80	2N4032	40	3.3UF/25V	.19
7402	74L533	.40	74F153	1.58	74C375	2.50	4520	1.00	LF398H	6.50	UA1458	50	8293	25.80	IN4002	05	BF469	80	2N4032	40	3.3UF/25V	.19
7404	74L537	.40	74F158	1.58	74C376	2.50	4521	2.00	LF398H	6.50	UA1458	50	8293	25.80	IN4002	05	BF469	80	2N4032	40	3.3UF/25V	.19
7406	74L540	2.50	74F159	1.58	74C377	2.50	4522	1.00	LF398H	6.50	UA1458	50	8293	25.80	IN4002	05	BF469	80	2N4032	40	3.3UF/25V	.19
7407	74L542	.40	74F161	1.58	74C378	2.50	4523	1.00	LF398H	6.50	UA1458	50	8293	25.80	IN4002	05	BF469	80	2N4032	40	3.3UF/25V	.19
7408	74L544	.40	74F162	1.58	74C379	2.50	4524	1.00	LF398H	6.50	UA1458	50	8293	25.80	IN4002	05	BF469	80	2N4032	40	3.3UF/25V	.19
7410	74L547	.40	74F163	1.58	74C380	2.50	4525	1.00	LF398H	6.50	UA1458	50	8293	25.80	IN4002	05	BF469	80	2N4032	40	3.3UF/25V	.19
7411	74L548	.40	74F164	1.58	74C381	2.50	4526	1.00	LF398H	6.50	UA1458	50	8293	25.80	IN4002	05	BF469	80	2N4032	40	3.3UF/25V	.19
7413	74L549	1.50	74F165	1.58	74C382	2.50	4527	1.00	LF398H	6.50	UA1458	50	8293	25.80	IN4002	05	BF469	80	2N4032	40	3.3UF/25V	.19
7414	74L551	.40	74F166	1.58	74C383	2.50	4528	1.00	LF398H	6.50	UA1458	50	8293	25.80	IN4002	05	BF469	80	2N4032	40	3.3UF/25V	.19
7416	74L554	.40	74F167	1.58	74C384	2.50	4529	1.00	LF398H	6.50	UA1458	50	8293	25.80	IN4002	05	BF469	80	2N4032	40	3.3UF/25V	.19
7417	74L555	.40	74F168	1.58	74C385	2.50	4530	1.00	LF398H	6.50	UA1458	50	8293	25.80	IN4002	05	BF469	80	2N4032	40	3.3UF/25V	.19
7420	74L573	.40	74F170	1.58	74C386	2.50	4531	1.00	LF398H	6.50	UA1458	50	8293	25.80	IN4002	05	BF469	80	2N4032	40	3.3UF/25V	.19
7421	74L574	.40	74F171	1.58	74C387	2.50	4532	1.00	LF398H	6.50	UA1458	50	8293	25.80	IN4002	05	BF469	80	2N4032	40	3.3UF/25V	.19
7423	74L575	.40	74F172	1.58	74C388	2.50	4533	1.00	LF398H	6.50	UA1458	50	8293	25.80	IN4002	05	BF469	80	2N4032	40	3.3UF/25V	.19
7425	74L576	.40	74F173	1.58	74C389	2.50	4534	1.00	LF398H	6.50	UA1458	50	8293	25.80	IN4002	05	BF469	80	2N4032	40	3.3UF/25V	.19
7426	74L583	.40	74F174	1.58	74C390	2.50	4535	1.00	LF398H	6.50	UA1458	50	8293	25.80	IN4002	05	BF469	80	2N4032	40	3.3UF/25V	.19
7427	74L585	.40	74F175	1.58	74C391	2.50	4536	1.00	LF398H	6.50	UA1458	50	8293	25.80	IN4002	05	BF469	80	2N4032	40	3.3UF/25V	.19
7430	74L586	.31	74F176	1.58	74C392	2.50	4537	1.00	LF398H	6.50	UA1458	50	8293	25.80	IN4002	05	BF469	80	2N4032	40	3.3UF/25V	.19
7432	74L590	.60	74F177	1.58	74C393	2.50	4538	1.00	LF398H	6.50	UA1458	50	8293	25.80	IN4002	05	BF469	80	2N4032	40	3.3UF/25V	.19
7437	74L592	.55	74F178	1.58	74C394	2.50	4539	1.00	LF398H	6.50	UA1458	50	8293	25.80	IN4002	05	BF469	80	2N4032	40	3.3UF/25V	.19
7438	74L593	.40	74F179	1.58	74C395	2.50	4540	1.00	LF398H	6.50	UA1458	50	8293	25.80	IN4002	05	BF469	80	2N4032	40	3.3UF/25V	.19
7440	74L595	.60	74F180	1.58	74C396	2.50	4541	1.00	LF398H	6.50	UA1458	50	8293	25.80	IN4002	05	BF469	80	2N4032	40	3.3UF/25V	.19
7442	74L596	.60	74F181	1.58	74C397	2.50	4542	1.00	LF398H	6.50	UA1458	50	8293	25.80	IN4002	05	BF469	80	2N4032	40	3.3UF/25V	.19
7444	74L597	.40	74F182	1.58	74C398	2.50	4543	1.00	LF398H	6.50	UA1458	50	8293	25.80	IN4002	05	BF469	80	2N4032	40	3.3UF/25V	.19
7445	74L598	.40	74F183	1.58	74C399	2.50	4544	1.00	LF398H	6.50	UA1458	50	8293	25.80	IN4002	05	BF469	80	2N4032	40	3.3UF/25V	.19
7446	74L599	.40	74F184	1.58	74C400	2.50	4545	1.00	LF398H	6.50	UA1458	50	8293	25.80	IN4002	05	BF469	80	2N4032	40	3.3UF/25V	.19
7447	74L600	.40	74F185	1.58	74C401	2.50	4546	1.00	LF398H	6.50	UA1458	50	8293	25.80	IN4002	05	BF469	80	2N4032	40	3.3UF/25V	.19
7448	74L601	.40	74F186	1.58	74C402	2.50	4547	1.00	LF398H	6.50	UA1458	50	8293	25.80	IN4002	05	BF469	80	2N4032	40	3.3UF/25V	.19
7450	74L602	.40	74F187	1.58	74C403	2.50	4548	1.00	LF398H	6.50	UA1458	50	8293	25.80	IN4002	05	BF469	80	2N4032	40	3.3UF/25V	.19
7451	74L603	.40	74F188	1.58	74C404	2.50	4549	1.00	LF398H	6.50	UA1458	50	8293	25.80	IN4002	05	BF469	80	2N4032	40	3.3UF/25V	.19
7454	74L604	.40	74F189	1.58	74C405	2.50	4550	1.00	LF398H	6.50	UA1458	50	8293	25.80	IN4002	05	BF469	80	2N4032	40	3.3UF/25V	.19
7470	74L605	.40	74F190	1.58	74C406	2.50	4551	1.00	LF398H	6.50	UA1458	50	8293	25.80	IN4002	05	BF469	80	2N4032	40	3.3UF/25V	.19
7472	74L606	.40	74F191	1.58	74C407	2.50	4552	1.00	LF398H	6.50	UA1458	50	8293	25.80	IN4002	05	BF469	80	2N4032	40	3.3UF/25V	.19
7473	74L607	.40	74F192	1.58	74C408	2.50	4553	1.00	LF398H	6.50	UA1458	50	8293	25.80	IN4002	05	BF469	80	2N4032	40	3.3UF/25V	.19
7474	74L608	.40	74F193	1.58	74C409	2.50	4554	1.00	LF398H	6.50	UA1458	50	8293	25.80	IN4002	05	BF469	80	2N4032	40	3.3UF/25V	.19
7475	74L609	.40	74F194	1.58	74C410	2.50	4555	1.00	LF398H	6.50	UA1458	50	8293	25.80	IN4002	05	BF469	80	2N4032	40	3.3UF/25V	.19
7476	74L610	.40	74F195	1.58	74C411	2.50	4556	1.00	LF398H	6.50	UA1458	50	8293	25.80	IN4002	05	BF469	80	2N4032	40	3.3UF/25V	.19
7477	74L611	.40	74F196	1.58	74C412	2.50	4557	1.00	LF398H	6.50	UA1458	50	8293	25.80	IN4002	05	BF469	80	2N4032	40	3.3UF/25V	.19
7478	74L612	.40	74F197	1.58	74C413	2.50	4558	1.00	LF398H	6.50	UA1458	50	8293	25.80	IN4002	05	BF469	80	2N4032	40	3.3UF/25V	.19
7479	74L613	.40	74F198	1.58	74C414	2.50	4559	1.00	LF398H	6.50	UA1458	50	8293	25.80	IN4002	05	BF469	80	2N4032	40	3.3UF/25V	.19
7480	74L614	.40	74F199	1.58	74C415	2.50	4560	1.00	LF398H	6.50	UA1458	50	8293	25.80	IN4002	05	BF469	80	2N4032	40	3.3UF/25V	.19
7481	74L615	.40	74F200	1.58	74C416	2.50	4561	1.00	LF398H	6.50	UA1458	50	8293	25.80	IN4002	05	BF469	80	2N4032	40	3.3UF/25V	.19
7482	74L616	.40	74F201	1.58	74C417	2.50	4562	1.00	LF398H	6.50	UA1458	50	8293	25.80	IN4002	05	BF469	80	2N4032	40	3.3UF/25V	.19
7483	74L617	.40	74F202	1.58	74C418	2.50	4563	1.00	LF398H	6.50	UA1458	50	8293	25.80	IN4002	05	BF469	80	2N4032	40	3.3UF/25V	.19
7484	74L618	.40	74F203	1.58	74C419	2.50	4564	1.00	LF398H	6.50	UA1458	50	8293	25.80	IN4002	05	BF469	80	2N4032	40	3.3UF/25V	.19
7485	74L619	.40	74F204	1.58	74C420	2.50	4565	1.00	LF398H	6.50	UA1458	50	8293	25.80	IN4002	05	BF469	80	2N4032	40	3.3UF/25V	.19
7486	74L620	.40	74F205	1.58	74C421	2.50	4566	1.00	LF398H	6.50	UA1458	50	8293	25.80	IN4002	05	BF469	80	2N4032	40	3.3UF/25V	.19
7487	74L621	.40	74F206	1.58	74C422	2.50	4567	1.00	LF398H	6.50	UA1458	50	8293	25.80	IN4002	05	BF469	80	2N4032	40	3.3UF/25V	.19
7488	74L622	.40	74F207	1.58	74C423	2.50	4568	1.00	LF398H	6.50	UA1458	50	8293	25.80	IN4002	05	BF469	80	2N4032	40	3.3UF/25V	.19
7489	74L623	.40	74F208	1.58	74C424	2.50	4569	1.00	LF398H	6.50	UA1458	50	8293	25.80	IN4002	05	BF469	80	2N4032	40	3.3UF/25V	.19
7490	74L624	.40	74F209	1.58	74C425	2.50	4570	1.00	LF398H	6.50	UA1458	50	8293	25.80	IN4002	05	BF469	80	2N4032	40	3.3UF/25V	.19
7491	74L625	.40	74F210	1.58	74C426	2.50	4571	1.00	LF398H	6.50	UA1458	50	8293	25.80	IN4002	05	BF469	80	2N4032	40	3.3UF/25V	.19
7492	74L626	.40	74F211	1.58	74C427	2.50	4572	1.00	LF398H	6.50	UA1458	50	8293	25.80	IN4002	05	BF469	80	2N4032	40	3.3UF/25V	.19
7493	74L627	.40	74F212	1.58	74C428	2.50	4573	1.00	LF398H	6.50	UA1458	50	8293	25.80	IN4002	05	BF469	80	2N4032	40		



# "BIG BOARD II"

**Over 1,000 sold**

Jim Ferguson, designer of the "Big Board" distributed by Digital Research Computers, has produced a stunning new Computer, "Big Board II". It has the following features:

## 4 MHz Z80-CPU AND PERIPHERAL CHIPS

The Ferguson computer runs at 4 MHz. Its monitor code is lean, uses Mode 2 interrupts, and makes good use of the Z80-A DMA chip.

## 64K DYNAMIC RAM + 4K STATIC CRT RAM + 24K E(PROM OR STATIC RAM

"Big Board II" has the three memory banks: the first memory bank has eight 4164 RAMs that provide 60K of user space and 4K of monitor space. The second memory bank has two 8Kx8 SRAMs for the memory-mapped CRT display and space for six 2732 As, 2Kx8 static RAMs, or pin-compatible E(PROMs, the third memory bank is for RAM or ROM added to the board via the STD bus. Whether bought as a bare board, a full kit, or assembled and tested, it comes with a 450nS2732A EPROM containing the monitor.

## MULTIPLE-DENSITY CONTROLLER FOR SS/DS FLOPPY DISKS

The new Ferguson single-board computer has a multiple-density disk controller, it can use 1793 or 8877 controller chips since it generated the signal with TTL parts. The board has two connectors for disk signal with 34 pins for 5.25" drivers, the other with 50 pins 8" drives.

## VASTLY IMPROVED CRT DISPLAY

The new Ferguson SBC uses a 6845s CRT controller and 8002 Video Attributed controller to produce a display that will rival the display of quality terminals. Characters are formed by a 5 x 7 dot matrix on 15.75 KHz monitors and 7x9 dot matrix on 15.75 KHz monitors. The display is user programmable with the default display 24 lines of 80 characters.


## STD BUS CONNECTOR

The Ferguson computer brings its bus signals to a convenient place on the PC board where users can solder a DSTD, bus cards can be plugged directly into it, and it can as well be connected by bus cable to industry-standard card cages.

## A Z80-A S10/0 = TWO ASYNCHRONOUS/SYNCHRONOUS SERIAL PORTS

## TWO Z80-A CTCs = EIGHT PROGRAMMABLE COUNTERS/TIMERS

The new Ferguson computer has two Z80-A CTCs. One is used to clock data into and out of the Z80-A S10/0, while the other is for systems and application use.

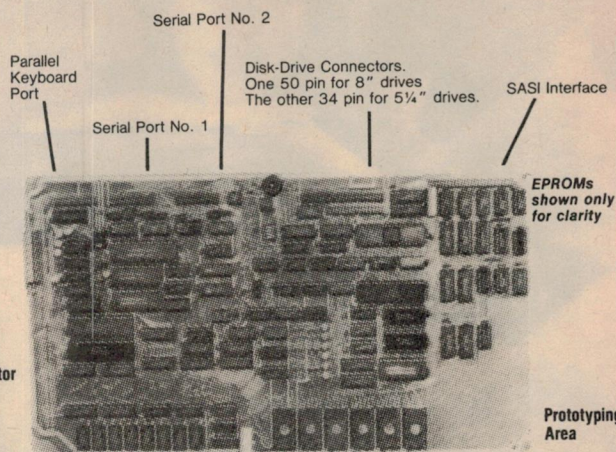

## PROM PROGRAMMING CIRCUITRY AND SOFTWARE

The new Ferguson SBC has circuitry and drivers for programming 2716s, 2732(A)s, or pin-compatible (E) EPROMs. Software \$25 extra.

## CP/M

CP/M with Russell Smith's CB10S for the new Ferguson computer is available for \$230. + TAX  
The CB10S is available separately for \$65. + TAX  
Actual board size: 39.6cm x 22.2cm. 5 inch B10S being developed. Approx price \$95. + TAX

## Kit Price

**\$695 inc tax Less 10% for 3+**

**\$895 Assembled and Tested**

# NEW SINGLE BOARD PRODUCTS AND PRICING

## THE 6809 "UNIBOARD"™ SINGLE BOARD COMPUTER KIT

PERFECT FOR COLLEGES, OEM'S, INDUSTRIAL  
AND SCIENTIFIC USES!

**64K RAM! DOUBLE DENSITY  
FLOPPY DISK CONTROLLER!**


FEATURES THE POWERFUL, THIRD GENERATION, MOTOROLA 6809  
PROCESSOR!

Many software professionals feel that the 6809 features probably the most powerful instruction set available today on ANY 8 bit micro. Now, at last, all of that immense computing power is available at a truly unbelievably low price.

### FEATURES:

- ★ 64K RAM using 4116 RAMs.
- ★ 6809E Motorola CPU.
- ★ Double Density Floppy Disk Controller for either 5-1/4 or 8 inch drives. Uses WD 1793.
- ★ On board 80 x 24 video for a low cost console. Uses 2716 Char Gen Programmable Formats. Uses 6845 CRT Controller.
- ★ ASCII keyboard parallel input interface. (6522)
- ★ Serial I/O (6551) for RS232C or 20 MA loop.
- ★ Centronics compatible parallel printer interface. (6522)
- ★ Buss expansion interface with DMA channel. (6844)
- ★ Dual timer for real time clock application.
- ★ Powerful on board system monitor (2732). Features commands such as Go To, Alter, Fill, Move, Display, or Test Memory. Also Read and Write Sectors. Boot Normal, Unknown, and General Flex™.

PC BOARD IS  
DOUBLE SIDED, PLATED THRU  
SOLDER MASKED, 11 x 11-1/2 IN.

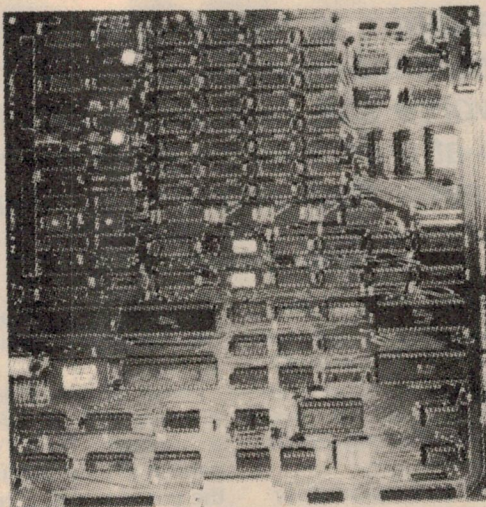

BLANK PC BOARD  
\$199.95 + tax  
WITH PAL'S, AND  
TWO EPROMS.

FOR 5-1/4 OR 8 INCH  
SOURCE DISKETTE  
ADD \$25 + tax

\$599.00 incl tax  
COMPLETE KIT!  
FULLY SOCKETED.

ALL OPTIONS ARE  
STANDARD. NO  
EXTRAS TO BUY!

## YOUR CHOICE OF POPULAR DISK OPERATING SYSTEMS:

FLEX™ from TSC	\$209
OS9™ from Microware	\$289
Specify 5-1/4 or 8 Inch	

**48-50 A'BECKETT ST, MELBOURNE 3000 VIC**

**PHONE (03) 347 9251**

Mail Order Delivery Instructions: Minimum Pack and Post \$3.00 for Australia Post. Please allow extra for bigger orders and Certified, Airmail or Registered Post. Minimum order is \$5.00. Please address orders to Mail Order Department, PO Box 235, NORTHCOTE, 3070, VICTORIA. PHONE (03) 481 1436.





Philips "Trendset" features what they describe as the "ultra-modern monitor look".

Another revolutionary idea from Matsushita: a projection type portable receiver/monitor, smaller, lighter and more economical to operate than a conventional design.



# TECHNOLOGY IS CONSTANTLY ON THE MOVE...

*We get frustrated, at times, when something we've just purchased is superseded by a new model or, worse still, by a new idea. But it's unavoidable at a time when technology is expanding faster than at any time in history.*

by NEVILLE WILLIAMS

It's not so long ago that a colour television receiver was a marvel enough in itself — the fulfilment of John Logie Baird's dream from the 1920s. But in the last decade, modern-day inventors have found many roles for the glowing screen other than mass entertainment.

It is being used to display captions for viewers with impaired hearing; information received via off-air teletext, or obtained by phone line access; the readout from a domestic computer, or maybe a computer in another city or another country; full-colour graphics derived mathematically or hand-drawn; graphics for electronic games;

information, lyrics or still pictures from the tracks of compact audio discs. And so on.

These new developments, plus the provision of hifi-stereo sound, are all set to change the TV/video marketing pattern in Australia from now on. Over the past few years, television sales have centred around small receivers, bought as a second set, but this is only half the picture, according to Heacliffe Teal, Director of Vesa Wholesale, Australian distributors for the Blaupunkt range of receivers from Bosch (West Germany). He says:

"Now, with the introduction of stereo

sound and receivers that cater for such new technology as teletext and/or caption TV, we are set to see the replacement of primary household sets. This will result in a dramatic increase in sales of 63cm models."

Based on their experience in West Germany, Bosch/Blaupunkt expect that a significant proportion of new 63cm receivers sold will be up-market models with such features as full remote control, two-channel sound for stereo or bilingual programs, easy adaptability for teletext and possibly videotex, access for audio and video systems, etc.

In keeping with this, the local distributors have announced the release of a new range of modern Blaupunkt domestic receivers (pictured). Two have 53cm (diag) screens, two have 63cm screens, while the fifth and top-of-the-range model has a 63cm screen plus a self-contained multi-head VCR.

All include stereo (or two-channel) sound circuitry, plus dual loudspeakers and provision for connection to an external hifi system and to external audio/video accessories. All have full-function infrared remote control units, with provision to control both picture and sound, and all are readily adaptable to teletext and, in some cases, to videotex as well.

[For details of the Blaupunkt range of receivers, contact: Weston Communications Group Pty Ltd, 2nd Floor, 31 Coventry St, Sth Melbourne, 3205. Phone (03) 690 7404].

## Receiver/monitors

While manufacturers other than Bosch have announced — or will be announcing — self-contained, high technology receivers, another quite different trend is emerging: the "monitor" concept. It assumes that many



householders will ultimately want to group their video and hifi equipment to form a single "entertainment centre", with quality loudspeakers to handle all sound and a quality monitor or VDU (visual display unit) to provide the picture.

Sony was one of the first into this field in Australia, with their "Profeel" range of video monitors, announced in the early part of '82. They had no in-built tuner but the picture circuitry could handle video from external sources, irrespective of standard: PAL, SECAM or NTSC.

About the same time, for those with higher ambitions and a bank balance to match, Sony were offering their VideoScope projection system — virtually a video monitor with a home-movie size screen.

In mid '83, Sharp released three receiver/monitors aimed directly at the consumer market and setting the style for other models to follow. Reviewed in our July '83 issue, they comprised a 13cm (diag) all-purpose portable and two deluxe domestic models with 34cm and 38cm screens. As the term receiver/monitor implies, they could be used either as self-contained receivers or interconnected by audio and video cables to peripheral equipment, in the role of a monitor.

As yet, not many viewers have actually

implemented the idea of a domestic entertainment centre but the concept of a TV set as a piece of equipment rather than a piece of furniture is certainly gaining ground. Philips new "Trendset" range is evidence of this, with sales literature which describes it as "featuring the ultra-modern monitor look" in traditional silver-grey or in other colours, if preferred.

In a larger monitor format, Philips have their "Match-line" receiver which is similar in concept and appearance to the Sony Profeel.


Philips have also released a new range of domestic television receivers which incorporated teletext and stereo sound. Apart from these features, the new Philips receivers represent a departure

from previous designs in that there are few controls on the sets themselves and a cordless remote control lets the user select any function including all teletext functions.


Philips sets will also feature direct video and audio inputs and outputs, stereo headphone socket and direct RGB inputs for high quality graphics presentation when using computers or video games.

## Digital processing

A video monitor or receiver/monitor can be designed around conventional TV receiver circuitry, with appropriate concessions to styling, possibly tighter performance specifications, and provision for direct access to internal

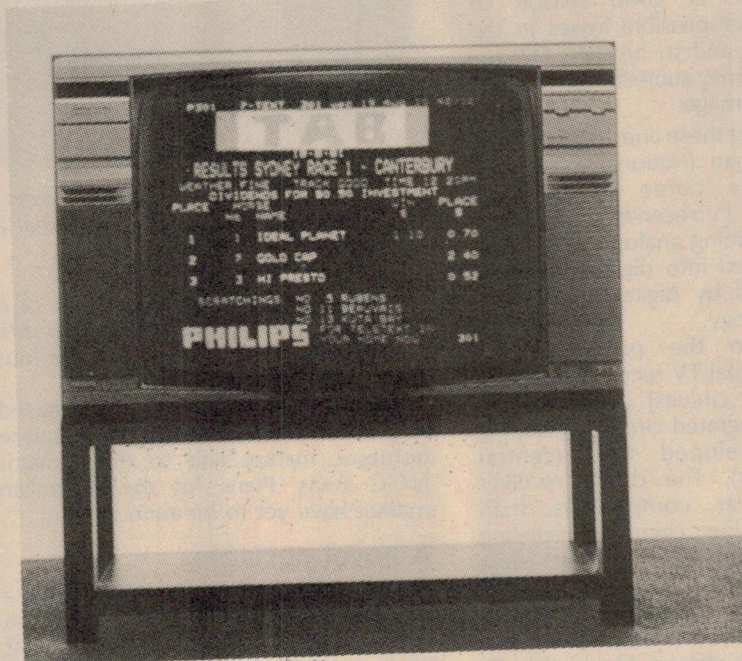

Above & left: this new generation 63cm set from Philips features stereo sound, RGB inputs, teletext and a full-function remote control.

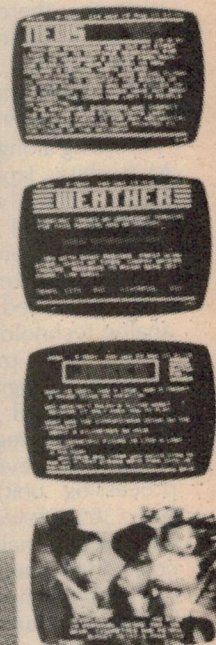

Below right: featuring digitally-based signal processing, this developmental receiver/monitor from Matsushita represents a complete departure in TV receiver design.





# TECHNOLOGY IS ON THE MOVE...

video (and audio) circuitry. The mere ability to inject signals at video level rather than via an RF modulator can markedly improve image quality, particularly when displaying computer graphics. This was very evident in our evaluation of the Sharp models, mentioned earlier.

While the ultimate quality from a monitor or receiver/monitor will be limited by the field, line, resolution and chrominance standards of all current TV systems, there is good reason to minimise further possible losses in the video circuitry and to be alert for any technique that may subjectively enhance the on-screen image.

Working along these lines, engineers at Matsushita, Japan (National Panasonic) have recently come up with a developmental TV receiver (pictured) in which the incoming analog video signal is first converted into digital form and then processed by digital rather than analog technology.


According to the press release, Matsushita's digital TV receiver uses two ICs (integrated circuits) and four LSIs (large scale integrated circuits) including a newly developed CPU (central processing unit). The digital receiver has 30% fewer components than equivalent analog circuitry, reducing cost and increasing reliability. Matsushita claims that digital processing gives a "crisper, cleaner image due to a reduction in spots, screen flickering and colour saturation effects". (At the time of writing we are not sure just what is the level of these improvements and what they will mean to the average viewer).

No less to the point, they say, the digital approach makes it very much easier to include provision for teletext and videotex and to provide input/output facilities for VCRs, home computers, hifi systems and other facets of component video.

The remote control system which has been developed along with the digital TV receiver uses an 11-bit digital signal system which is theoretically capable of controlling up to 2048 functions. It can very easily control all the functions of the receiver, with ample spare capacity to control the peripheral equipment as well.

It would be a matter of knowing which buttons to push!

Further to demonstrate the versatility of the digital system, the Matsushita receiver can superimpose a second full-colour video image on the main image,

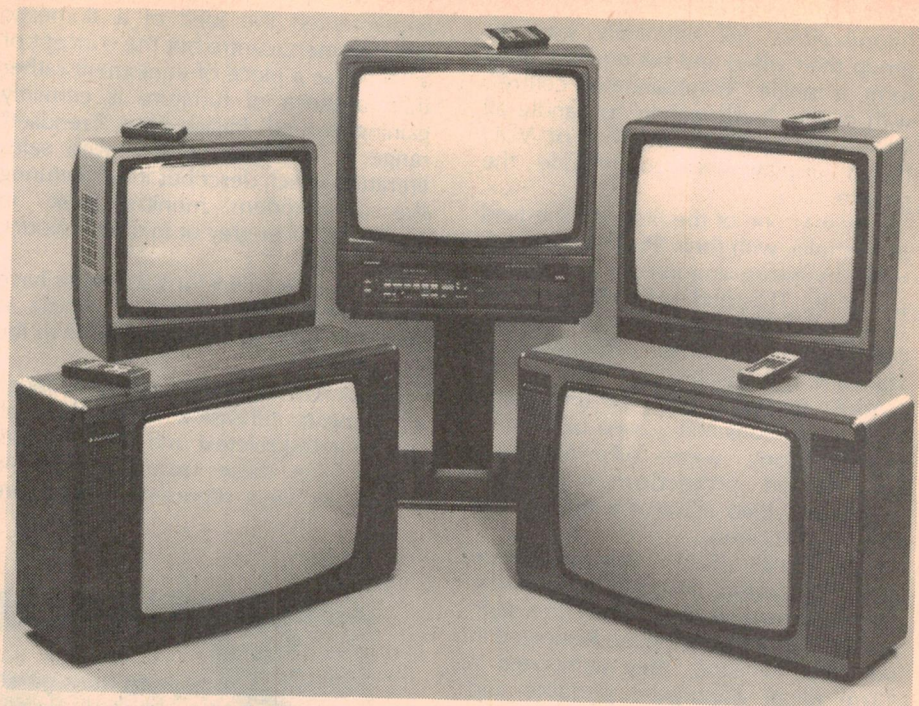

*The new range of Blaupunkt receivers feature full function IR remote control, two-channel sound, provision for external audio/Video connections and adaptability for teletext and videotex.*

allowing the viewer to keep track of a second program. The 15cm inset picture can be moved at will to any of the four corners of the 50cm screen.

Initial release of the digitally based receiver/monitor will be to the Japanese domestic market and to other major NTSC areas. Plans for the Australian market have yet to be announced.

## A novel portable

What if tomorrow's customer wants a small, compact receiver/monitor, for use in the office, or a hotel room? Matsushita's backroom team have been working on that, too. They have come up with a portable projection type unit with a 16cm (diag) screen, which folds down and collapses into a case measuring 250mm x 310mm x 85mm (W x D x H) and weighing 3kg. It can be used as a normal TV receiver but can double as a display terminal for video signals and information, including teletext and videotex.

Based on the technology of Matsushita's large-screen projection TV system, the new developmental portable uses three 5cm projection tubes for red, green and blue images and a flat, rectangular screen with a Fresnel/lenticular surface. It can operate from an AC or DC supply or from rechargeable batteries, drawing a mere 12 watts.

Matsushita point out that conventional colour TV receivers, providing a picture of comparable size from a single colour tube, end up twice the size, twice the weight and draw twice the power.

This receiver, too, is planned for initial release in Japan, with no commitment as yet to a version for Australia.

## 8mm video cassettes

Right now, the hottest issue on the world video scene is Kodak's intention to release a camcorder (single-unit video camera/recorder) during the current year, using 8mm cassette tape. While designed primarily for portable use, it would have a companion mains-powered cradle and a tuner/timer to permit its use as a domestic VCR.

The Kodak announcement gained credence from the fact that the equipment is being produced in Japan by Matsushita (National Panasonic) with the special metal particle or evaporated metal tape coming from TDK. In addition, both RCA and GE have announced that they will take up the format, although it may have been more a statement of intention than an immediate commitment.

It remains to be seen whether Kodak will be able to move as quickly as planned, and how the remainder of the industry will react. Present indications are that most manufacturers will stay with the existing formats, as originally intended, and simply leave it to Kodak to do the spadework on 8mm — until they feel that the time is ripe to move in.

However, Kodak and anyone else who moves in too soon, face the risk that the standards consensus could fall apart, with the dissidents making a bid for supremacy with a later, higher technology variant.



# MAY DAY MAY DAY

## Prices Head for Crash Landing!!

**1 pole/10position  
thumbwheel  
switches**

Around 1/3 normal cost. Top quality  
Stolec design. Thousands of uses.  
Grab them while they last.

**\$2.25 each  
10 for \$20.00**

**IC Clearance**

DP 8212N Normally  
\$3.40, Now **\$2.50**  
Z80A/PIO Now **\$5.00 \$4.50 10up**  
Z80A/SIO Now **\$11.00 \$9.90 10up**  
Z80A/DART and Z80A DMA Now  
**\$11.00 \$9.90 10up**  
2114LP2 (low power) **\$1.50 each,**  
**\$1.30 10up**  
2764-4 **\$13.00, \$11.00 10up**

**New Shipment of  
Textool ZIFs**

Plenty of stock!!  
24 pin **\$11.50**  
28 pin **\$14.00**

**Quality DIP Switch  
at Tiny Price**

These superb German DIP switches  
at a grab 'em price. Normal or  
hermetically sealed available (please  
specify). Limited stock so get them  
now!!

**\$2.25 each,  
\$2.00 10up**

**Scoop Purchase on  
Incredible  
Wallphones**

Normally selling for \$26.95 (RRP  
\$49.95). Look at the features:

- ★ Pushbutton Keyboard
  - ★ Mute Button
  - ★ Last number radial
  - ★ Ringer silencer
  - ★ Lead and plug
  - ★ Includes wall bracket
- Very few left at this price

**only \$14.95**

Note: Not Telecom  
Approved.

**Fantastic TI TIL308  
display - Amazing  
features**

This incredible display chip has  
thousands of uses and at this price  
you can afford to use them for  
experiments. 27" red 7 segment  
display with built in counter logic  
and BCD input. Left hand decimal  
point

**\$1.75 each, COMPLETE  
\$1.50 10up WITH DATA**

**Quality LEDs at  
Grabbable Prices!!**

Super quality 3mm LEDs from  
Stanley at clearout prices. Only in  
bags of 100 at this mad price.

**12 Digit LED  
Display - Experi-  
menter's Delight**

These superb 7 segment displays  
have thousands of uses. Each digit is  
7 segment with right hand decimal  
point. Eight inputs for segments and  
12 inputs for digits (cathodes).  
Anodes are internally connected.  
They were selling for \$1.50 each.  
Reduced this month - grab 'em  
now!!

**only \$1.00**

**DATA INCLUDED**

**240V AC Open  
Frame Motors -  
going fast**

These motors are fantastic value.  
Thousands of uses. Grab one while  
you've got the chance!!

**only \$2.00**

**Bargain  
Displays**

Litronix red single digit displays.  
Now drastically reduced to clear.  
Lite pipe construction, type DL-750  
common cathode. Character height  
.630" 7 segment D.P. left. Forward  
voltage (typ) 3.4V, 20mA

**70¢ each,  
10 for \$5.00**

**Scoop of AA NiCads**

Complete with solder tags, high  
quality Japanese 'Powersonic'  
brand. 500mAh. **\$2.30,**  
Normally \$2.95  
This month only:

**\$2.00  
10up**

**Scoop on 'Grain of  
Wheat' Lamps**

We are selling these amazing lit-  
tle lamps for only 10% of their  
original price. 12V/60mA and a  
tiny 5 1/2mm h. igh by 2 1/2mm wide.  
Perfect for miniature projects,  
modelling etc.

**\$10 per 100**

**Micro Switches  
at Micro Prices!**

Top quality Cherry Brand Micro-  
switches at giveaway prices.  
15A/250V AC rating. Normally  
open contact with lever.

**75¢ each 10 for  
\$6.00**

**14 and 16 pin  
IC Sockets**

Get your hands on these top quality  
AMP low profile IC sockets at a  
fraction of their normal price.

**10 for \$1  
100 for \$9**

**.1 ohm/7 watt  
Resistors**

Grab these top quality resistors.  
Great for power supplies, amps etc.  
Fraction of the normal price, while  
they last.

**10 for \$4.00**

**Monster  
Trimpot Pack**

100 mixed values and types.  
Normally selling for 30 to 50¢ each!  
Grab a pack or two and save!!

**only  
\$5.00**

**EA and ETI Project  
PCB - grab 'em**

We now stock the full Acetronics  
range of PCBs for EA and ETI  
projects. Phone for best prices  
around.

**100 metre rolls of  
Speaker Cable  
Deal of a Lifetime**

Grab a few rolls of speaker cable.  
Normally selling for \$12.00 each.  
Get them now and save!!

**Callers Only only \$8.00**

**Monster  
Tagstrip Pack**

50 assorted tagstrips. Thousands of  
uses. Some of our opposition are  
selling these for \$1.00 each! They  
must be kidding!!

**\$2.50**

**Fluke Meter  
Prices Slashed**

**U.S. made precision at  
Japanese copy prices.**

If you've been looking for a digital  
multimeter, you'll know Fluke are the  
best. We are the only company in  
Australia to discount Fluke. Now you can  
afford a quality U.S. made precision  
instrument for no more than a  
hobbyist's meter.

**Fluke 73**

- ★ Unique Digital PLUS  
analogue display
  - ★ 0.7% basic DC accuracy
  - ★ 10A current range
  - ★ Full autoranging
  - ★ All ranges protected to  
1000V dc, 750VAC,  
resistance ranges to 500V
  - ★ 3200 count resolution  
(bettered only by 4.5 digit  
meters). Eg You see 24.05V  
instead of 24.0V and 220.3V  
instead of 220V
  - ★ Power down and  
self check with 'OK Chip'.
- Battery life better than  
2000 hours.

**Normal price \$129.00**

**Sheridan  
price**

**\$99.00**

**SHERIDAN ELECTRONICS**

164-166 Redfern Street,  
Redfern NSW 2106.  
Phone (02) 699 5922.  
Mail Orders to PO Box 229  
Redfern NSW 2016

**Mail Charges:**

\$5.00-\$9.99 ..... \$3.50  
\$10.00-\$24.99 ..... \$4.00  
\$25.00-\$49.99 ..... \$6.00  
\$50.00-\$99.99 ..... \$7.00  
\$100.00 or over ... \$8.00

**Trading Hours**  
Mon-Fri ..... 9am-5.30pm  
Thurs. .... 9am-7pm  
Saturday ..... 9am-12noon


Note: We accept both Bankcard  
and American Express. However we  
cannot give quantity discounts on  
credit card purchases or account  
orders. Minimum for account orders  
is \$50.00  
Minimum order is \$6.00.

**All prices include  
sales tax.**



**WE'RE WELL  
VERSED IN  
VALUE VIDEO**

(SAY THAT QUICKLY!)

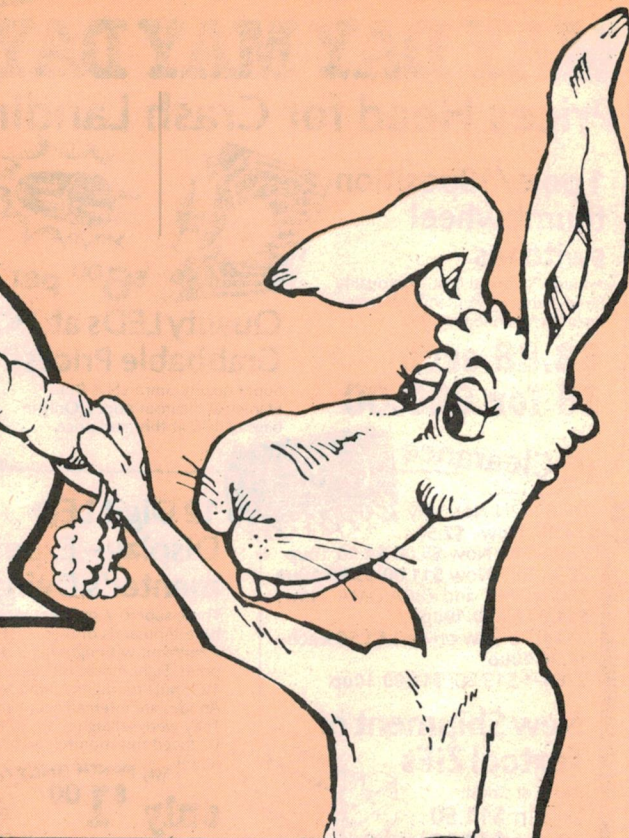

**DON'T BUY JUST AN ENHANCER!**



**The  
DICK  
SMITH**

## Video Processor

Far more than JUST an enhancer! This incredible processor enhances, stabilizes, amplifies and modulates as well... Latest imported design is a boon when dubbing, restoring detail normally lost in the process. But it also includes a stabiliser for tapes with 'Copyguard' eliminating the often associated annoying rolling.

Plus it has a video distribution amplifier so you can feed up to 3 other recorders or monitors AND its built-in modulator allows you to watch the enhanced picture during playback on any ordinary TV (great for A/B comparison). Incredible? Wait until you try it: it's even better!

Cat Y-8510

**WHAT A BUY!**

**\$129<sup>95</sup>**

**Fantastic stereo sound from your  
mono video with this kit!**

## Stereo Simulator Mk II

Wish those old video movies had modern stereo sound? This low-cost gadget turns almost any mono signal into amazingly good synthetic stereo!

SEE EA APRIL 1983

**\$19<sup>95</sup>**

Cat K-3421

**EASY TO BUILD COMPLETE WITH INSTRUCTIONS**



## It's got everything! Video to Video Cable

Having trouble with video leads? No more! This incredible video lead pack will match ANY video to ANY video with its unique plug & socket system. Cat W-1287



**\$19<sup>95</sup>**

## Top quality, top name 3 hour Video Cassettes

Huge bulk purchase of famous name video tapes allow this ridiculous price. Not those imported 'cheapies' which can do a lot of damage to your heads - these tapes are top quality!

BETA Agfa Cat C-3415

Polaroid


Video



**\$12<sup>50</sup>  
ea**

## BNC to BNC Cable

2 metres quality 75 ohm coax fitted with BNC plugs at each end. Suits many of the VCR's available. Why make one and risk shorts when it's already done for you? Cat W-1285



**\$6<sup>95</sup>**

5 up... \$5.95

**DICK SMITH ELECTRONICS**



**See page 98 for full address details.**



# TECHNOLOGY IS ON THE MOVE...

There could well be room for such a move because the consensus standards, as used in the "Kodavision" equipment, are essentially an extension and a refinement of existing VHS/BETA technology, offering similar results from a smaller package.

Mr E. G. Woods, Managing Director and Chief Executive Officer of Kodak (Australasia) Pty Ltd described the picture quality available from the 8mm system, in terms of colour, sharpness and hue, as "excellent" and "at least equal to that from the half-inch systems".

Noel Proudfoot, of Eastman Kodak's Photographic Technology Division gave much of the credit for the reduced dimensions to the use of metal particle or evaporated metal tape, both of which offered a potential data packing density from 30% to 50% greater than present oxide tapes. With high-precision amorphous metal heads, this permitted the same order of information retrieval, as for the present system, but with narrower tracks and at a scanning speed of 3.8m/s, which is much lower than either VHS or BETA.


## An 8mm audio format?

This brings me to another intriguing development — a high quality stereo sound recorder using the self-same 8mm metallised tape video cassette.


In mid '82, in company with a number of other technical journalists, I visited Matsushita's VCR factory in Osaka, Japan. At the time, we were probing to find out what we could about 8mm video but, like most other manufacturers at the time, Matsushita were not very forthcoming.

During the conference, I suggested that an 8mm video cassette might prove very suitable for high quality audio recording. With their SV-P100, National were already recording top quality audio on a standard VHS cassette. It should be possible to obtain equivalent performance from an 8mm system, with the advantage that the cassette was of more convenient dimensions — much the same, in fact, as an existing compact audio cassette.

The Matsushita engineers were at their inscrutable best, even when my query was raised again later. I was left in doubt as to whether they hadn't thought about it, or whether they didn't want to admit to anything. Perhaps it was simply inappropriate for a video engineer to get involved in audio recording; that was the

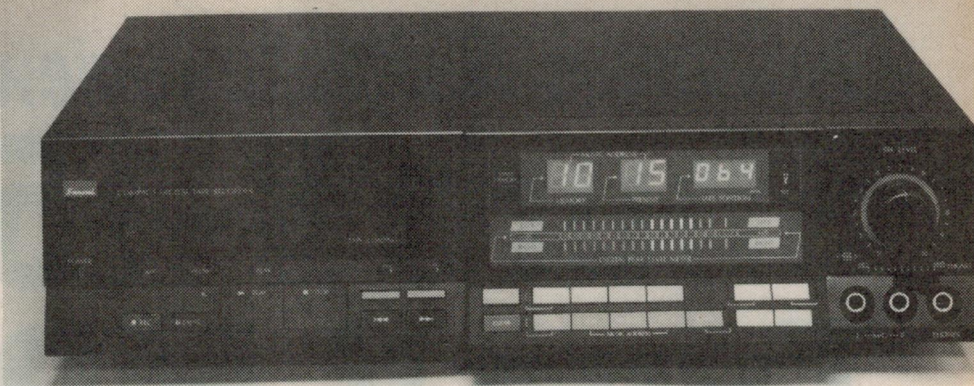

First exhibited at the Japan Audio Fair, this prototype Sansui Compact Digital Tape recorder (CDT) is a logical extension of 8mm video technology.

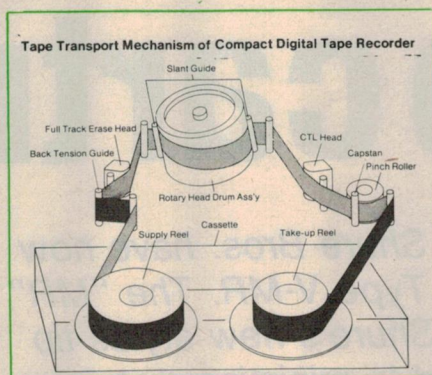

The Sansui CDT audio recorder would appear to use a normal 8mm M-loading video tape drive but run at half normal drum and tape speed to give a 3-hour play/record time.

concern of another factory, elsewhere in the city!

Later on, I put the idea to Bill Andriessen of BASF (Germany) who admitted that it made a lot of sense. However, he pointed out that there was quite a gulf between European and Japanese thinking on a future audio tape format. In general, the European companies preferred something about the size of the compact cassette. It was big enough to handle and label conveniently, without being too big. The Japanese seemed more inclined to something about the size of the microcassette; why make anything larger than you strictly have to?

Now, out of the blue, Sansui have come up with a developmental prototype of the very thing I have been talking about — a high quality stereo audio recorder, using a standard 8mm video cassette. They have christened it the Sansui CDT (Compact Digital Tape) recorder.

An accompanying diagram of the tape traverse mechanism suggests a scaled down version of the VHS system, basically similar to that used in 8mm video recorders. The only dimensional reference is to a drum diameter of 40mm but deduction suggests that, for

audio recording, the mechanism is being run at half the normal NTSC speed (ie, at 900rpm) thereby preserving the normal track width but doubling the playing time: ie, from 90 minutes to 180 minutes for an evaporated metal cassette.

(An option which Sansui mention without elaboration is that of operating the recorder in long-play mode, giving a record/play time of six hours).

A feature of the system is that it allows the program to be cued to 1/30-second accuracy for subsequent editing, programmed play, etc. Provision has been made to give each segment an absolute address, which the unit can locate on its own initiative.

Sansui admit that, in terms of random access, tape cannot rival disc, but their CDT system does allow the tape to be scanned at 200 times the normal speed. Automatic Edit Listening is also available when the user simply wants to fast-forward over unwanted segments, commercials, etc.

The prototype CDT (pictured) is an interesting hybrid between a video recorder, audio recorder and CD player, with front loading, a variety of Play/Record/Pause and tape traverse pads, microphone and headphone jacks, recording control and level indicator, plus buttons for editing and programming, and readouts for memory, tape position, etc.


No specifications are given in terms of actual performance but Sansui refer to it as a modern example of PCM recording suitable for either professional or amateur use.

Sansui claim that the CDT is the first unit of its kind. It will be interesting to see whether it also turns out to be the last or whether other manufacturers take up what would appear to be a very logical spin-off from 8mm video technology. If they do, hifi buffs may gain access to a deck exceeding the versatility of a compact cassette player and rivaling the performance of compact disc.



*Electronics Australia review*

# Shure V-15 Type V-MR photo cartridge

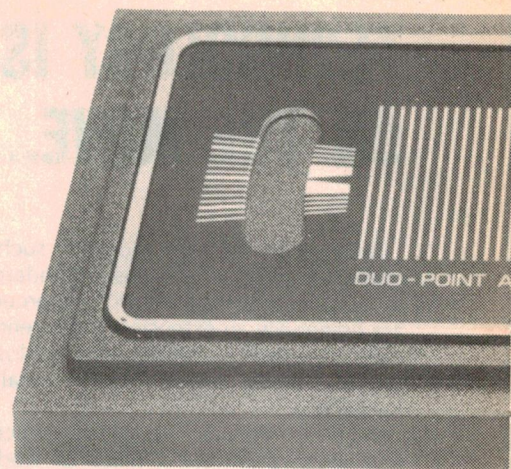

*Refining the ultra-refined, Shure Bros. have now released the Model V-15 Type V-MR. The "MR" stands for "micro-ridge", Shure's new stylus tip geometry which is claimed to minimise distortion and record wear.*

To anyone who has not purchased a quality cartridge for a few years, buying the new Shure V-15 Type V-MR is certain to be a satisfying experience. You don't just get a cartridge locked into some fancy but useless plastic package. Instead, Shure has put together a complete installation package which will enable the user to get the very best from his or her purchase.

Shure's alternative to a useless rosewood box or solid block of perspex is a rather strange oblong package with a

"technical look" about it. Taking the lid off is a bit gimmicky — it's a bit like getting one of those childproof pill containers uncapped. You rotate this circular recessed knob and the lid unclips to reveal the cartridge and other bits.

Actually the cartridge is mounted in a thoughtful way, as pictured at the top of the page. The cartridge body is held by a saddle-clamp arrangement while the stylus assembly is secured in a separate holder. This is a good idea because it

minimises the chance of damage to the delicate stylus assembly while the cartridge body is unbolted and mounted in the tonearm headshell.



It turns out, when you detach the cartridge body from the baseplate, that the baseplate itself is an integral part of the installation kit. It is Shure's duo-point alignment gauge. This is used to align the cartridge correctly for minimum tracing distortion.

Normally this is done by first making sure that the cartridge is mounted parallel to the headshell centre-line (which is difficult since headshells do not carry guide marks) and then sliding the cartridge back or forth to get the correct stylus overhang (over the turntable spindle). This last step can also be difficult with some tonearms which will not move all the way to the centre of the platter. Shure has a different and better approach with its duo-point alignment gauge. Shure has found that if the cartridge is aligned so as to be tangential to the record groove at radii of 66 and 120.7mm, minimum tracing distortion results.



The duo-point gauge meets these criteria. Interestingly, when the cartridge is set with the gauge it may well be quite out of square with the headshell.

The installation procedure is as follows: First, detach the cartridge body and mount in the tonearm headshell. Shure supply a range of plastic screws and matching soft plastic nuts which slide into key-ways on the cartridge body. These go some way towards making the task reasonably straightforward but when all is said and done it is still a fiddly job when you're all thumbs and shaky.

Then you insert a dummy stylus into

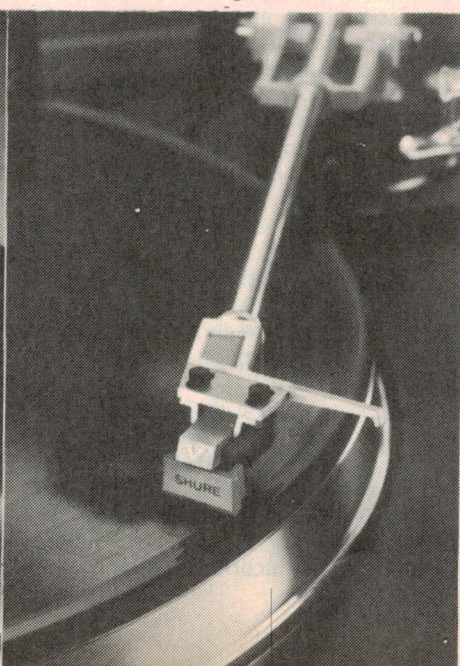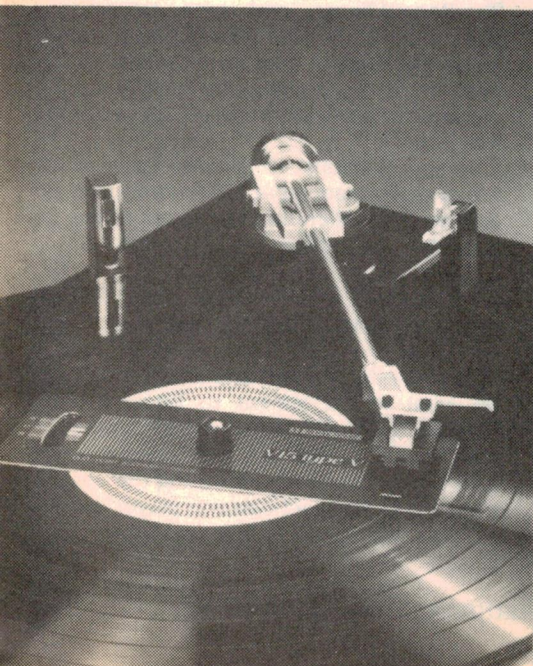



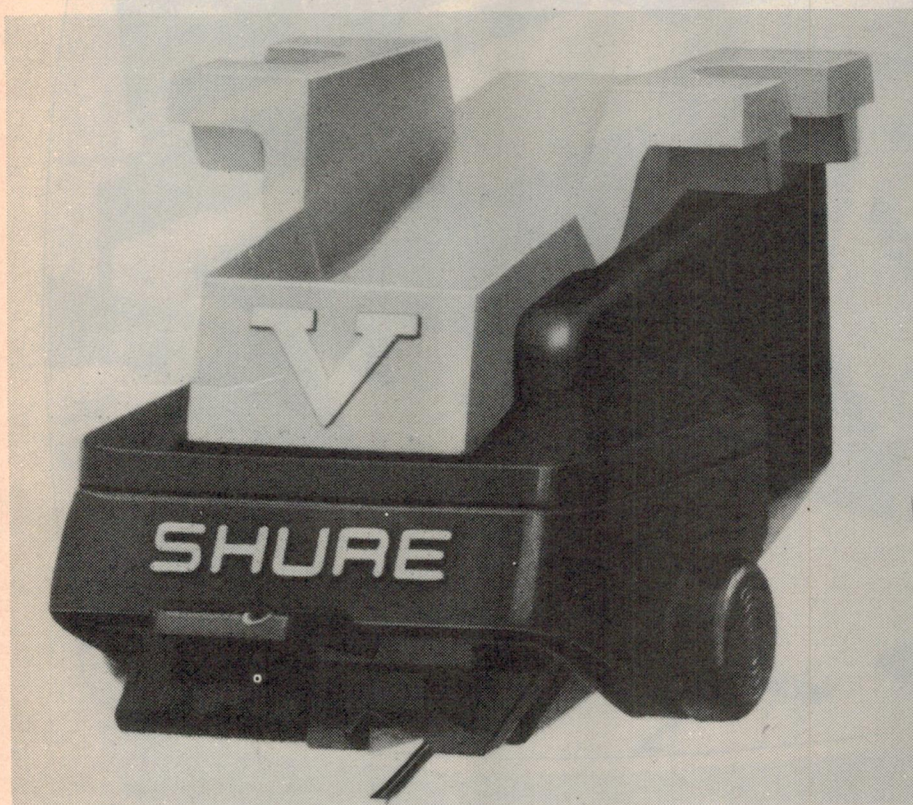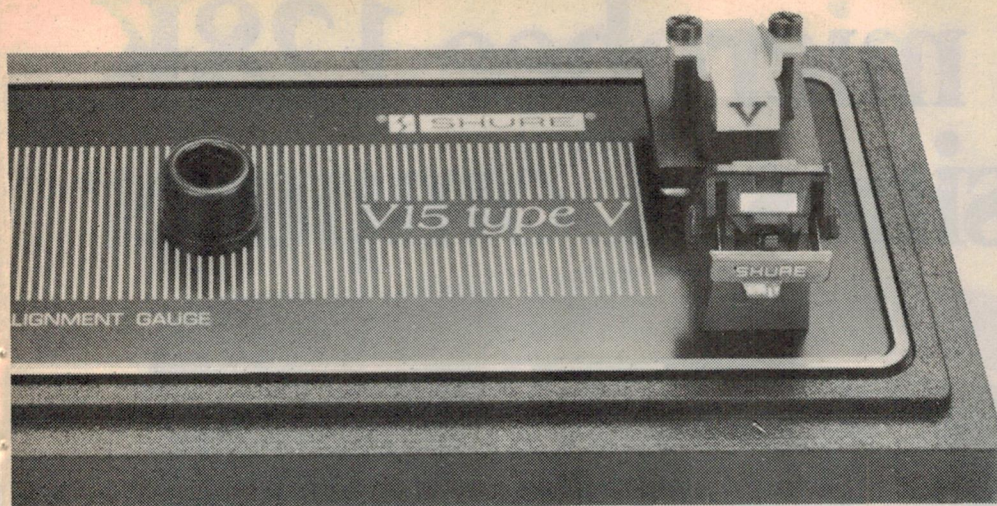

the cartridge body and fit the headshell into the tonearm socket. Shure refer to the dummy stylus as the "Alignment stylus" and it is used to ensure that the cartridge body is correctly aligned (ie, square and parallel) to the record surface.

Ensuring that the cartridge is square-on to the record surface is the tricky bit. Most tonearms have a small screw adjustment to the socket which allows the headshell to be rotated slightly to achieve this. The rub is that it is often very difficult to shift this screw and make the adjustment. Shure provide an alternative in the form of plastic shims to pack up one side of the cartridge.

With that step complete, the duo-point alignment gauge comes into play. This is first placed with its centre holes over the turntable spindle. The cartridge fixing screws are loosened off and the

cartridge body (minus the stylus) is pressed down into the special nest in the gauge. The cartridge screws are tightened and then the whole assembly lifted up and the gauge placed so that its elongated hole is placed over the turntable spindle. Again the cartridge is readjusted to bring the alignment mark in line with the spindle.

After that, the tonearm must be balanced and the tracking force set to 1.5 grams. This actually gives a stylus tracking force of one gram since the Shure stabiliser brush exerts 0.5 grams on the record surface. The brush performs three functions: removes dust particles from the record groove, conducts away static charges and damps out arm resonance.

This last factor is probably the most important since it enables quite ordinary tonearms to give a sterling performance

with the Shure cartridge. With an undamped tonearm, small ripples in the record surface can excite the arm resonance and lead to quite drastic mistracking, to the point of groove jumping. With the Shure stabiliser brush in operating position such ripples are tracked without any problems.

In fact, we found the tracking performance of the Shure V-15 Type V-MR to be the best we have ever experienced. Whether Shure have modified the stylus suspension as well as the profile of the stylus geometry we do not know but it turned in a superlative tracking performance, all at an effective tracking force of one gram. In this respect, no other cartridge can touch it. The V-MR tracked all our test discs without problems.

The claimed frequency response was a little harder to verify. Shure include a computer-printed test sheet with each V-15 cartridge and the sheet for our sample showed the response to be within 1dB over the range from 1kHz to 20kHz. At first we could not get within coo-ee of that. Shure recommend a capacitive load of 250pF in parallel with 47kΩ but note that 100pF to 400pF capacitance will cause negligible change from the optimum. We found the opposite.

Unless the load capacitance due to the connecting cables and preamp load is close to 250pF or less, the frequency response will not be to specification. In fact it can vary by as much as 3dB, depending on where the electrical resonance is placed by the shunt capacitance. Within that constraint, the Shure cartridge came very close to having a response within 1dB from 20Hz to 20kHz.

On the other hand, we had no great difficulty in confirming the printout figures for separation between channels: 26.5dB left channel and 32dB right channel, at 1kHz. The equivalent figures at 10kHz were 24.7dB and 21dB. Nowhere was it less than 15dB. Cartridge waveform was good, particularly on square waves where it was near perfect.

Okay. So what did it sound like? Quite simply, it sounded superb. There was no question that it was and is, one of the finest, if not the finest, cartridge available. In every respect, the Type V-MR performs flawlessly. On strings it is very sweet, without overdoing it in the slightest and it is smooth and very defined in bass regions too. What more can we say?

Unfortunately, the Type V-MR does not come cheaply. Recommended retail price is \$576 while the replacement stylus is \$260. Further details can be obtained from high fidelity retailers or from the distributors, Audio Engineers Pty Ltd, 342-344 Kent St, Sydney. (LDS).



NEW  
RELEASE

# microbee 128K Small Business Computer



“microbee  
is the biggest  
success story  
of Australian  
computer  
design and  
manufacture”

Now just released, **microbee 128K dual drive Small Business Computer**, priced at only \$2245 with popular programs from the world's best known software houses and a friendly 'user interface', appealing to beginners and experts alike.

A total package deal for the serious computer user, the **microbee SBC** comes with world class software such as **WORDSTAR** (accounts for 50% of the Australian wordprocessing market), **MicroSoft MULTIPLAN** (The 3rd generation spreadsheet), **MicroSoft BASIC**, and the powerful **MICROWORLD** packages such as **TELCOM 2** (networking to other computers either directly or through a **MODEM**), **Disk BASIC** and **Disk WorkBee**.

The special user interface called 'B-Shell' allows the use of industry standard software, while being much 'friendlier' than most CP/M systems. 'ICONS' are used to select commonly used programs. **INIT** and **TRANSFER** programs simplify 'housekeeping' function. A comprehensive **HELP** system is also supplied.

The CP/M 2.2 operating system fully

utilises the capabilities of the 128K SBC. Automatic disk caching increases program speed by 50%. 'M-drive' software allows 65K of RAM to be used as a fast disk. **SETDRIVE** allows other disk formats such as **KAYPRO**, **IBM**, **OSBORNE** to be read.

In its review of the leading Australian computer manufacturers in October 1983, **Australian Micro Magazine** claims:

**"microbee is the biggest success story of Australian computer design and manufacture, and the only Australian attempt to get into the demanding consumer market.**

... it is listed on IDC's market predictions for this year."

**BUNDLED SOFTWARE**  
**microbee 128K Small Business Computer** comes complete with

'bundled' software from the world's best known Software Houses.

**SYBIZ Business Package and Database** (including Accounting, Pay Roll and Report Generator); **CP/M 2.2 Operating System**; **Wordstar 3.3** word processor by **Micropro**; **Multipan 1.0** spread sheet by **Microsoft**; **BASIC 80** by **Microsoft**; **Microworld Disk Basic**; **Wordbee**; **Telcom 2 Communications Package**; **Disk Utilities**; **Help Files**.


All programs are supported with easy to use condensed manuals and help files on the disks. Ask about the **microbee** training courses . . .

**Manuals Supplied:**— **microbee** disk manual (describes use of CP/M utilities and system specification); **Microworld BASIC**; **Microsoft BASIC**; **Microsoft Multipan**; **Wordstar Reference and Training Manual**; **Wordbee User Guide**.







# A complete, cost-effective, professional solution



**MULTIPLAN — Spreadsheets**



**SYBIZ — Accounting**



**WORDSTAR — Wordprocessing**



**ICON — Graphic Identification**

"Compare the features of microbee's Small Business Computer with any other computer at this price. microbee features include:—


**microbee 128K Small Business Computer-Z80A** operating at 3.375 Mhz, 128K bytes of dynamic RAM, 2K bytes screen and graphics RAM, 8K bytes of system firmware controlled with specially designed memory management unit. High resolution 512 x 256 PCG graphics, programmable parallel and serial ports.

Operating system	CP/M 2.2 with M/driver.
User interface	Disk caching
Wordprocessing	B-Shell
Spreadsheet	WORDSTAR 3.3
Accounting, Pay Roll etc.	MULTIPLAN 1.05
BASIC	SYBIZ Business Package
PCG high res. graphics	MICROSOFT, MICROWORLD
Communications	512 by 256 pixels
Terminal emulation	TELCOM 2
Serial Port RS232	ADM 3A/TELEVIDEO
Parallel Printer Port	INCLUDED
Internal loudspeaker	INCLUDED
Disk Drive Capacity	2 by 400 kbytes (FORMATTED)
MONITOR	AMBER/INCLUDED


Basic system price includes microbee 128K, Dual Drive Unit, microbee AMBER monitor, 'bundled' software, manuals and sales tax

**\$2,245**

**"Incredible 128K microbee Small Business Computer opens new opportunities for convenient disk based business applications"**

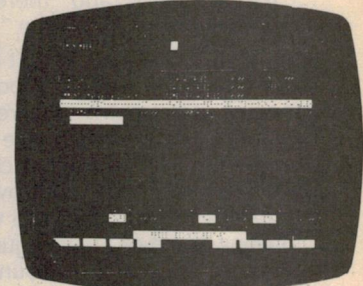

**SYPAY — Payroll Calculations**

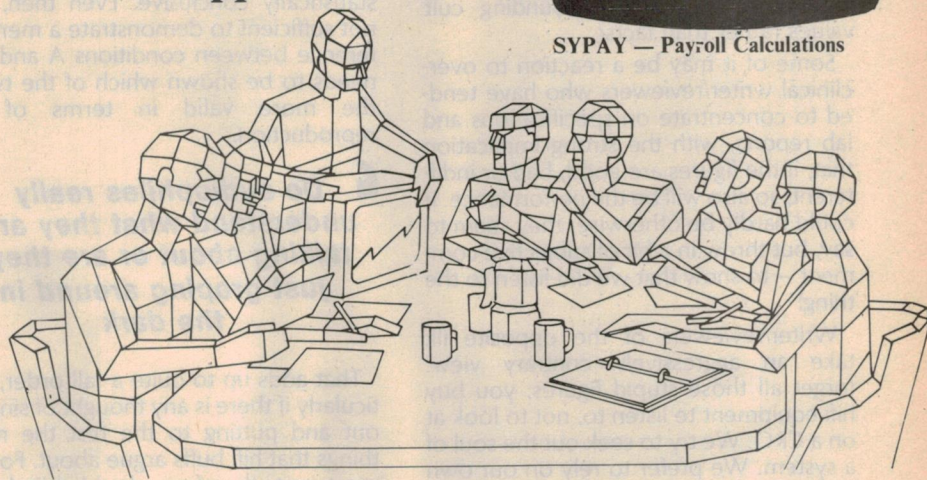

## microbee computer centres

1 Pattison Ave,  
Waitara 2077.  
Phone (02) 487 2711

729 Glenferrie Rd,  
Hawthorn 3122.  
Phone (03) 819 5288

141 Stirling Highway,  
Nedlands, Perth.  
Phone (09) 386 8250

Coolman Court,  
Weston A.C.T. 2611.  
Phone (062) 88 6384

151 Unley Road, Unley,  
S.A. 5061. (08) 272 1384

455 Logan Road,  
Stones Corner,  
Qld 4120

Koala Crescent,  
West Gosford 2250.  
(043) 24 2711

### Authorised Dealers in:—


**NSW:** Carlingford,  
Coffs Harbour, Concord,  
Hurstville, Lismore,  
Sydney, Waterloo,  
Wauchope  
**VICTORIA:**  
Glen Waverley,  
Melbourne.  
**QUEENSLAND:**  
Aitkenvale, Cairns,  
Milton.

**SOUTH AUSTRALIA:**  
Adelaide, Edwardstown,  
Port Lincoln.

**WESTERN AUSTRALIA:**  
Mount Tom Price.

**TASMANIA:**  
Launceston

**ACT:**  
Belconnen, Weston.

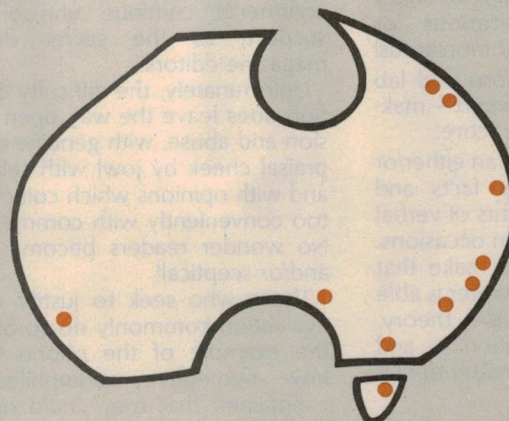

**Shops and Dealers  
Australia wide**



**DIRECT ORDERS**  
PHONE (02) 487 2711  
TELEX AA72767

**APPLIED  
TECHNOLOGY  
RETAIL PTY LTD**



**microbee**



# It's enough to turn a bloke into

Fair dinkum! Some of the articles being published these days in overseas hifi magazines are over the odds. They are expressed in language so emotive and so extravagant that it discredits the very points the respective writers are trying to make. As a result, one tends to note the articles while rejecting them as the stuff of which agnostics are made.

I am aware, of course, that the term "agnostic" normally carries a religious connotation but my dictionary assures me that, in a more general sense, it can also describe one who asserts: *"... the relativity and therefore the uncertainty of all knowledge."*

It would not be too difficult to end up in that frame of mind after looking over some of the items in recent hifi magazines. Where does the truth lie amongst all the extravagant claims, the speculation and the controversy. Do audiophiles really understand what they are talking about or are they just groping around in the dark; expounding cult values rather than facts?

Some of it may be a reaction to over-clinical writer/reviewers who have tended to concentrate on specifications and lab reports, with the strong implication that, if the figures are good, bad or indifferent, so also will be the performance. It could hardly be otherwise, they seem to say, but throw in a bit of subjective comment — to show that we did listen to the thing!

Writer/reviewers of the opposite ilk take an aggressively contrary view: forget all those stupid figures; you buy hifi equipment to listen to, not to look at on a CRO. We try to seek out the soul of a system. We prefer to rely on our own trained, golden ears to tell us whether the sound is truly magical, magnificent or mesmeric; musical, meritorious or modest; mediocre, murky or monstrous!

In this context, specifications and lab tests are downgraded or ignored — making a point and evening the score.

Personally, if I had to make an either/or choice, I'd rather interpret facts and figures than some of the flights of verbal fancy that one encounters on occasions. But I prefer not to have to make that choice; it is much better if a writer is able to assemble all the evidence — theory, measurement and observation — and present it in a reasonably matter-of-fact way.

Laboratory measurements have the advantage that they can be standardised, can be used to specify performance

parameters, and can be verified by anyone having the necessary equipment. They acquire a basic credibility as a result. But do they tell the whole story? Unfortunately, some react as if they did; realistically, they should be seen as valuable objective evidence, to be considered alongside subjective impressions.

The problem about subjective opinion alone is that, while it can be (and often is) expressed with great conviction, it cannot be substantiated by anything short of double-blind testing, carefully set up, independently controlled and statistically conclusive. Even then, it is not sufficient to demonstrate a mere difference between conditions A and B; it needs to be shown which of the two is the more valid in terms of hifi reproduction.

**“ Do audiophiles really understand what they are talking about or are they just groping around in the dark ”**

That adds up to quite a tall order, particularly if there is any thought of singling out and putting to the test the many things that hifi buffs argue about. For the most part, therefore, double-blind tests remain in the “too-hard” basket and the arguments continue unresolved — I suspect, to the secret delight of magazine editors!

Unfortunately, the difficulty of verification does leave the way open to confusion and abuse, with genuine critical appraisal cheek by jowl with self-delusion and with opinions which coincide rather too conveniently with commercial gain. No wonder readers become confused and/or sceptical!

Those who seek to justify subjective evaluation commonly do so by quoting the example of the phono turntable: how perceptive audiophiles stoutly maintained that they could hear a difference in the “sound” of quality turntables, even though engineers kept insisting that the units were virtually iden-

## FORUM

Conducted by Neville Williams

tical in their essential properties: speed and speed regulation, wow and flutter, rumble, hum field radiation and so on.

Did not the boffins ultimately discover that sound quality was indeed being affected by acoustic feedback from the loudspeakers to the cartridge by way of the turntable, the mat and even the disc itself? Did they ultimately not have to admit that we (the golden-ear set) had been right all along?

While I suspect that the tale of the turntable may be somewhat over-simplified, I would nevertheless like to draw a couple of points from it:

Firstly, subjective observations did lead to a logical technical explanation and to methods by which the effect could be displayed and evaluated in the laboratory. It is reasonable to assume that other subjective observations should follow the same process, provided they are valid. A subjective observation which continues to defy any tenable explanation must itself remain suspect.

The other point is that, because one subjective observation has been verified, it does not follow that all the others are in some way validated. Each still has to be proved or disproved on its merits.

What brought all this to mind was an article by David Wren in the December '83 issue of the English hifi magazine “HiFi Today”: “Absolute wire and Randall Research lead”.

I gather that “Absolute” cable is intended for loudspeaker connections and, from the description, is rather like a jumbo-size flat TV ribbon. It contains a pair of 720-strand “high purity” copper conductors, each about 7mm in diameter, sheathed and held apart by cream-coloured PVC insulation, to form a flattish cable about 20mm wide. According to David Wren, it is much to be preferred to the well known “Monster” cable but, at £3.25 per metre, costs about the same.

Now I don't hold any special brief for Monster cable or for some of the claims that have been made for it, but the direct comparison and other remarks which followed, I found highly intriguing, to say the least.



# an audio agnostic!

But first, the background:

It is a fact that resistance, capacitance and inductance in loudspeaker leads can absorb audio power or otherwise affect operation of the system. Conventional wisdom is to use a twin pair to each loudspeaker (so that inductive effects tend to cancel), not too closely spaced (to limit capacitance), not too thin (to limit resistance) and certainly no longer than strictly necessary (to limit all three).

As a rule of thumb, it is commonly accepted that the DC resistance of the leads and connections should not exceed 5% of the DC resistance of the loudspeaker system. Depending on the cable run, this requirement might be satisfied with the thickest available lamp cord but it is preferable to seek out

**“Because one subjective observation has been verified it does not follow that all others are in some way validated”**

heavier gauge twin cable intended for automotive use, or produced expressly for loudspeaker connections. With that kind of lead and a normal domestic 8 ohm system, losses are generally reckoned to be negligible.

However, acting on the professed opinion that “negligible” isn’t good enough, a number of companies have marketed deluxe loudspeaker cables — usually at a “deluxe” price. And, lest prospective purchasers be left in any doubt as to their possible merit, they are commonly credited in publicity material with producing a quite startling improvement in sound quality — a claim that sits oddly alongside the supposedly “negligible” losses occasioned by less pretentious (and less costly) cable.

To kill or to over-kill; that is the question!

While I have kept my money in my pocket, I will say this: with its heavy multistrand twin conductors, Monster cable should be able to impart to a hifi system whatever benefits might accrue from the use of extra-low resistance loudspeaker cables. I seriously question how much scope would be left for still further subjectively significant improvement.

But David Wren has no such reservation.

Based, presumably, on subjective judgment and the memory of what the cables sounded like before he changed them over, the improvement with “Absolute” cable was described as “im-

mediate and worthwhile”. This held true, so he says, with loudspeaker runs as short as two metres.

Come on now! Two metres?

While one should not, perhaps, defile subjective judgment with talk of mathematics, it would be an interesting exercise to work out the magnitude of the DC resistance, AC resistance (including skin effect), inductance and capacitance involved in two metres or ordinary heavy-duty loudspeaker cable, of Monster cable, and of Absolute cable. Then, having done so, to note the differences between them and to form some judgment as to their possible effect on system behaviour when feeding a load with as much internal DC resistance, AC resistance, inductance and capacitance as a domestic loudspeaker.

Nor do David Wren’s further remarks alleviate my problem in accepting his verdict. On the contrary, they add to it. He says:

*Against the Monster, for instance, Absolute wire is far lower in coloration. Monster has a certain “plummy” thickness which tends to rob the sound of attack and clarity. The Absolute wire has better bass extension coupled with greater definition throughout the bass and mid frequencies. Couple this with more open, sparkling upper mid and you have a far more airy, ambient sound stage and a greater sense of presence.*

*... the cost of Absolute wire can be justified in the most modest of installations.*

Taken at face value (how else should they be taken?) those remarks claim a clearly audible advantage for Absolute cable in terms of overall sound quality, over most of the audio spectrum, and a freedom from the “plummy thickness” that allegedly characterises Monster cable.

As I said before, without holding any brief for Monster cable, I know of no technical reason why it could possibly impart a “plummy thick” sound to a typical hifi system and I know of no reason, either, why a competitor’s cable should not only obviate the plummyness but impart an all-round improvement in quality as per the description — even with a cable run as short as two metres.

It would be a pity not to conclude David Wren’s final pronouncement on Absolute loudspeaker cable:

*It interferes less with the signal than any other, allowing through more of the wanted information naturally, with less of the crunge.*

Crunge? What’s crunge?

Don’t know, old boy, but it sounds monstrous. Must take steps to get rid of it ... Absolutely!

At this point, I can well imagine an august audiophile somewhere, leaning back in his leather chair and fixing me with eyebrowed stare and the stem of his briar pipe:

“You seem to have forgotten one thing: Absolute cable is directional and that can make all the difference!”

In fact, I haven’t forgotten it; I simply wanted to talk about it separately.

When I first read about directional cables, I looked at the date of the magazine to check whether it happened to be the April issue. Surely it was a gag? But no; the writer appeared to be deadly serious; almost breathlessly so.

Listening tests had verified, he said, that there was a right way and wrong way to feed audio signals along connecting cables. Swap the cables around, and you could hear the difference. Taking advantage of this discovery, certain cables were being marketed with the input and output ends clearly marked. They must be installed so that the signal travels from input to output.

Going a step further, someone — I think it was someone else — referred to the practice as “sexing” cables, a term that seemed quite odd until I remembered

**“Crunge? What’s crunge? Don’t know, old boy, but it sounds monstrous. Must take steps to get rid of it ... absolutely”**

that, for decades, the industry has been specifying male and female connectors of one kind and another.

Tut, tut!

That first explanation of directionality seemed to rest on the idea of an audio signal moving, as some kind of an entity, from point A to point B. It suggested that the writer’s technical knowledge extended about as far as a simplified block diagram, drawn with arrows to show signal routing through a system. That’s about all the arrows do show!

What is actually conveyed by signal cables is an electrical current — and not a direct current, at that. It is an alternating current which is all the time reversing its direction of flow at an audio rate. If the proponents of the directional cable concept are going to convince this writer, for one, they will need to start off with a more credible explanation of what they’re on about.

A cable is directional in respect to what?

But that’s only the beginning. I may have missed it, of course, but I have yet to come across any responsible technical



# NEW KITS FOR THIS MONTH

## CAR BURGLAR ALARM \$70



EA MAY 84


## PROGRAMMABLE LIGHT CONTROLLER \$180



EA MAY 84


## STRESS METER \$29

BATTERY EXTRA

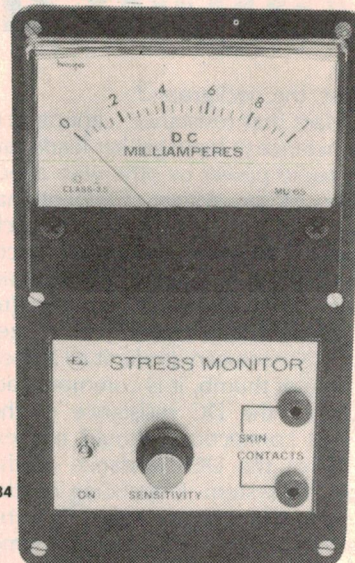


EA  
MAY 84

## TV PATTERN GENERATOR \$67.50

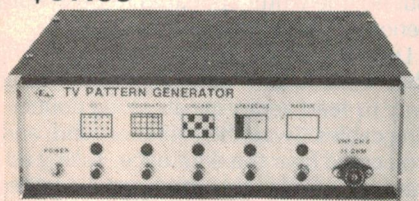


Anyone wishing to obtain the maximum performance from a colour TV receiver needs a pattern generator. Why not build this completely new design which provides five separate patterns: dot, crosshatch, checkerboard, grey scale and white raster.

## LCR BRIDGE \$149

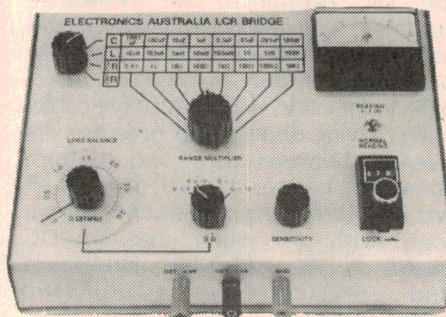

EA APRIL 84


## ETI 477 MOSFET MODULE \$63.50

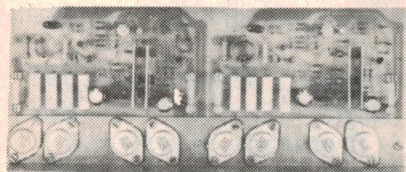

Remember the great ETI 5000 power amp. With this module as the hub of the ETI 5000 and a transformer you get an amazing power output of 150W RMS.

Plus Power Supply (No Trans) \$49.00  
Plus Transformer \$39.50

## VCR SOUND PROCESSOR \$57

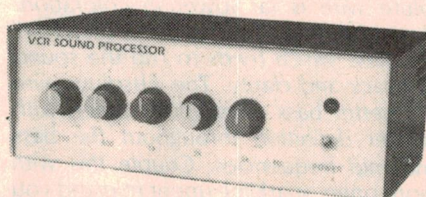

EA APRIL 84

## HEADPHONE AMPLIFIER \$28



EA MARCH 84

## TRANSISTOR ASSISTED IGNITION \$34.50

EA November 79




## AUDIO TEST UNIT FOR CASS DECKS \$47.50



EA October 81

## MIXER PREAMP TRANSFORMER \$26.50

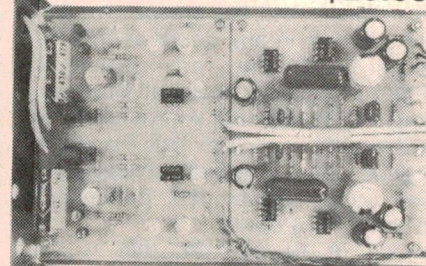

Easy construction and versatile operation, this Preamp was for coupling with the 300W "Brute" Power Amp. ETI 467 July 80


## MUSICOLOR IV \$84.00



Add excitement to parties, card nights and discos with EAs new Musicolor IV light show. This is the latest in the famous line of Musicolors and it offers features such as four channel "Color Organ" plus four channel light chaser, front panel LED display, internal microphone, single sensitivity control plus opto-coupled switching for increased safety. EA August 81


## BIPOLAR TRAIN CONTROLLER \$34.50

EA December 80

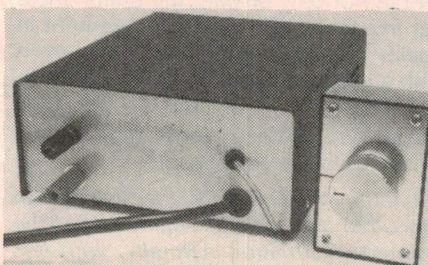

## CRYSTAL MARKER \$34.50 (INC 1MHZ X)

ETI 157 October 81

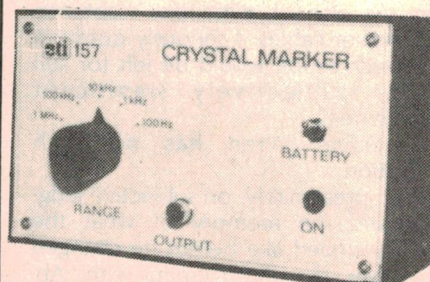



speculation as to how a cable gets to be directive in respect to whatever it's supposed to be carrying! At best, one finds broad references to the molecular structure of metals, impurities, semiconductor effects, and so on, leading to the assertion that, one of these days, the reason will emerge why signals travel better through wire this way, rather than that way.

In the meantime, they just do!

The fact of the matter is that, over the past several decades, there has been urgent, concentrated world-wide research into solid-state physics that has added enormously to our knowledge of material and current flow and spawned a huge array of components. But there has been no hint from that source, that I know of, of anything that would support the idea of directionality in signal cables.

And what of the cable manufacturers themselves? It seems strange that, after a century or more of producing cables for all manner of things, including audio distribution for some very discerning users, the discovery of supposed directivity in respect to analog audio signals should be left to an in-group of audiophiles using a mere few metres of connecting lead.

Is the property incidental to production — which way the metal is drawn through the dies, for example? Does the degree of "directionality" vary from batch to batch? How do the makers of Absolute and other "directional" cables determine which way round each individual batch should be made up for sale? By the way it is spooled? By some sort of electrical measurement? By golden-ear "testing"?

These are logical questions and it is not too much to expect logical answers before reaching for one's cheque book — sorry bankcard! The desirability of adequate, well-made, well-insulated, well terminated cables I understand. The need for good connection arrangements I understand. The merit of gold-plated contact surfaces I understand.

But directionality? I have yet to be enlightened.

Unfortunately, David Wren's article isn't of much help in this respect either. He seeks to bolster the case for the subjective evaluation of audio signal cables by injecting into the middle of it the now customary reference to the sound of turntables, referred to earlier. He observes:

*"... But nowadays most people realise there are great differences to be heard, even if they can't be measured."*

It's a pity to have to spoil a good story but, as I have pointed out, the effect has long been identified as having to do

mainly with acoustic feedback from the loudspeakers, through the turntable, etc, to the stylus. It has been set up in labs, observed on CRO screens, photographed, plotted, written about in technical magazines and thoroughly digested. It is one of the problems which CD players are credited with having eliminated.

The actual statement about cables reads thus:

*"Now I know that many people still dismiss sonic differences in cables as being all in the mind — if you can't measure a difference it's not there, is it? ... Ask any computer or long distance telecommunications engineer and you'll find they're quite clued up on cable technology and such aspects as to how twisting wires and material purity, in-*

**It seems strange that the discovery of supposed directivity in cables should be left to an in-group of audiophiles**

*...ulating materials, etc, can influence results. It's not black magic to them."*

There's only one thing wrong with the above statement: it doesn't support the writer's case!

**Many people still dismiss sonic differences in cables, etc:** Correct; and they'll continue to do so until they're given a credible reason to think otherwise.

**Computer and long distance telecommunications engineers are clued up about cables, etc.** Correct again. Technical handbooks have multiple chapters on cables, transmission lines, etc. Libraries have multiple textbooks on the subject. Engineers specialise in aspects of it. But, because they are so "clued up", I would expect them to be the hardest people of all to convince about anything out of line with theory.

The purveyors of deluxe and directional cable would have it made if they could only find someone from that area

able to produce a rigorous engineering paper validating their claims. It would be a sensation.

Until that happens, you'll just have to accept somebody's unsupported word for it all — or else acquire some very special equipment of your own. As David Wren puts it:

*"All you need, dear reader, is a pair of receptive ears!"*

Is that all? No, I would like to add one further observation.

I am no longer taken aback by references in the super cable case to twisted leads, skin effect, insulation, Litz wire and other ideas borrowed, rightly or not, from radio frequency technology but I was not prepared for a letter in the February '84 issue of "Hi-Fi News & Record Review".

A Mr D. Swann of Leeds, Yorkshire, professes to have tried and proved something that would presumably outperform either Monster or Absolute cable. They both use copper as the conductor and therein lies the problem.

Prompted by an earlier reference in the same journal, Mr Swann connected his Wharfedale Linton loudspeakers to the amplifier by means of lead tubing and lead wire. He appears to be particularly impressed by the lead tubing because even lead wire is slightly compromised by the insulation which wraps the surface along which the audio signal travels.


Says Mr Swann:

*"I compared my Lintons after I had tubed them with PWB lead tubes and the difference was audibly much better; as good, in fact, as changing for better speakers."*

As an audio cynic and an audio agnostic from way back, I can't help but indulge in the following imaginary scenario:

Mr D. Wren, the "Absolute" champion, questioning the opinion of Mr D. Swann and being politely told:

*"All you need, dear David, is a pair of receptive ears!"*

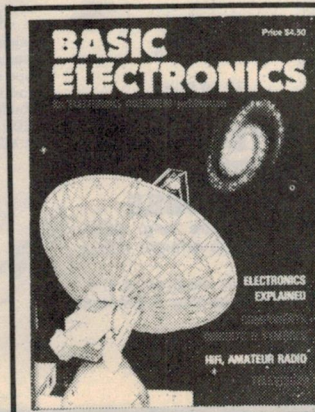

## Basic Electronics

**For the beginner, or for the hobbyist as a reference book and almost certainly the most widely used manual on basic electronics in Australia.**

It is used by radio clubs, in secondary schools and colleges, and in WIA youth radio clubs.

Begins with the electron, introduces and explains components and circuit concepts, details the construction of simple receivers. Separate chapters on test instruments, servicing amateur radio, audio techniques, stereo sound reproduction.

Available from "Electronics Australia", 57 Regent St, Chippendale 2008. PRICE \$4.50 OR by mail order from "Electronics Australia", PO Box 163, Chippendale 2008. PRICE \$5.40.



**NEW**

# CIVILIZATION DISCOVERS XIDEX.



Like the discovery of fire, Xidex Precision Flexible Disks herald a new era for civilization.

They are the most advanced and durable disks technology has produced and far exceed all known industry standards world-wide. Even the disk jacket is 33% thicker than the industry standard for greater protection from contaminants, and extended handling.

Xidex 5 1/4" disks carry a 10-year warranty. They are guaranteed 100% error-free and 100% precision made. Jaycar is proud to announce that we have been appointed distributors of the incredible 'XIDEX' range of computer mass storage media.

The decision to stock Xidex is in keeping with Jaycar's philosophy of keeping only prime quality products where possible. What other floppy carries a 10 YEAR WARRANTY and 100% error-free guarantee??

You can buy a floppy for up to \$2.00 less than the Xidex - but do you REALLY save? What is your time worth if you waste hours because of disk errors due to dud floppies?


Cat. XC-4770

**1-9 Disks - \$5.95 each**

**Box of 10 \$55.00**

(PICTURE OF OUR MANAGING DIRECTOR  
HOLDING XIDEX FLOPPY)

**NEW LOW PRICE**

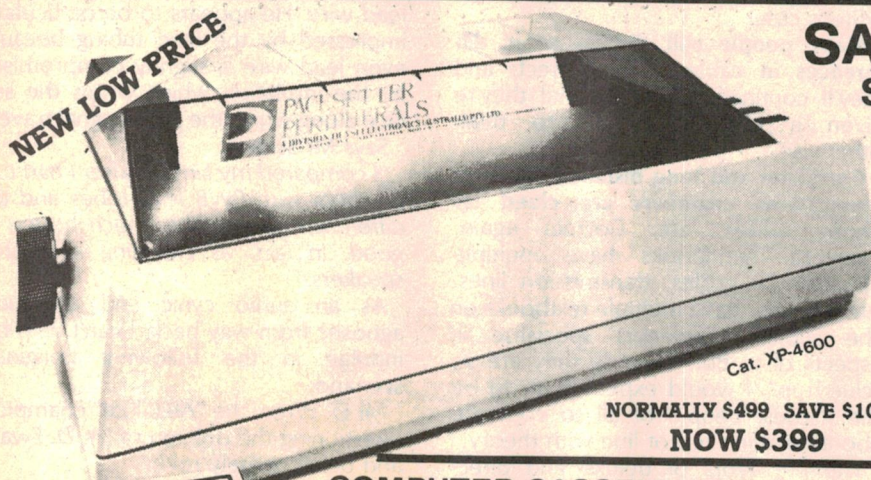

## SAVE \$100 SUPER 80/AMUST DP80

MASSIVE SCOOP PURCHASE has enabled us to bring you a quality 80 CPS Matrix Printer at our lowest price ever! We expect these to sell **FAST** so get in **EARLY** to avoid disappointment!

Your "Super 80" printer will enable you to print letters, reports, graphics generated pictures, etc. and importantly for the programmer Hard copy of program listings.

Operating under software control from any general purpose micro-computer the Super 80 features 13 different print types including emphasized (LETTER QUALITY). Bidirectional print action ensures smooth, quiet operation.

228 ASCII CHARACTERS, HANDLES 4" to 10" PAPER - STANDARD CENTRONICS INTERFACE  
Cat. XP-4600

**NORMALLY \$499 SAVE \$100  
NOW \$399**

### COMPUTER CASSETTES

Exceptionally good quality, leaderless blank cassettes in the usual plastic cases.

	C10	
Cat. XC-4710	1-9 \$1.20	10 up \$1.10
	C20	
Cat. XC-4715	1-9 \$1.30	10 up \$1.20
	C30	
Cat. XC-4720	1-9 \$1.50	10 up \$1.40

### AT LAST! "CENTRONICS" PRINTER CABLE FOR MICROBEE

At last a ready-built cable (1 metre long) which enables you to plug your MicroBee straight into a Centronics-type printer! Cable assembly includes interface electronics (74-LS123) in the rear of the Centronics plug. A Cannon 'D' plug is at the other end.  
Cat. XP-4650

**\$49.95**


**NEW!!!**

### Low Cost DATA CASSETTE Player

- Mains or battery operated
- Special instructions for loading instructions into computer
- Tape counter - A MUST!
- Works as audio recorder/player as well
- Inbuilt condenser microphone
- LED recording indicator!



**STAGGERING  
VALUE!!  
ONLY  
\$39.95**

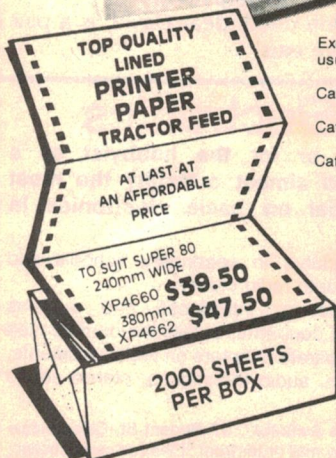

**STOP PRESS!! NOW OPEN ALL DAY SATURDAY (CONCORD STORE ONLY)**



**ONLY  
\$59.95  
NEW**



## FLOPPY DISK STORAGE CASE

Fantastic price breakthrough. A must for serious P.C. users. Will take up to 50 x 5 1/4" floppies in sets of 10. Compartments lift up and lock in place for easy identification of disk files. ABS resin case. Dimensions: 400mm long 180mm wide by 170mm high. Translucent plastic lid. Quality!  
Cat. XC-4780

## NEW! SPEAKER/EQUIPMENT CABINET FITTINGS

Jaycar has expanded its range of hardware for road cabinets, speaker and other equipment enclosures.

**HEAVY DUTY STRAP HANDLES**  
Overall length 250mm. Will lift a maximum weight of 50kgs! Ideal for speakers, amps, etc. English made.  
Cat. HS-8020


**ONLY \$5.95**



## PLASTIC LOCKING CORNER PIECE

Heavy duty plastic moulded corner fitting featuring male/female inserts. These are designed to fit together so that pieces of equipment (the same size) can stack up and lock together. Ideal for speaker boxes.  
Cat. HM-3826

**ONLY \$1.75 ea 10 up \$1.55 ea**




## ETI644A DIRECT CONNECT MODEM

See ETI Jan '83!!

Ref. ETI October 1982

Two models (i) Short form which contains ALL PCB components as specified by ETI (BEWARE!!). The genuine ETI PCB with plated-thru holes, solder mask and component overlay is supplied. We also supply at NO EXTRA CHARGE a full set of quality IC sockets. A must with plated-thru PCB - remember this when making comparisons.

(ii) Full kit. Includes: all of the above plus 12V plug-pack, case, switch and LED bezel and Cannon DB-25 RS-232 connector. Makes a complete stand-alone modem. • Capable of a range of Answer/Originate operating modes • Selectable Baud rate • Software controlled • Uses new patented technique • More reliable and faster than most acoustic modems.  
Arlec transformer as used in this project only \$22.00



## NEW MODEL

SHORTFORM KIT  
Cat. KE-4600

**ONLY \$169**

COMPLETE KIT  
Cat. KE-4601

**ONLY \$199**

## JOYSTICKS


These quality units are the self centering type with heavy duty suction cups which definitely keeps it in place. It has silver plated switch contacts, a pistol grip and is super responsive.

Cat. XA-5630 without plug

**\$19.50**

Cat. XA-5610 suit MicroBee

**\$29.50**



## HEAVY DUTY BAR HANDLES

Very robust design where strength coupled with an airtight design is desirable. As used in "Marshall" amps. Cutout hole size 119 x 221mm.

Cat. HS-8010

**\$11.95 10 up \$10.95 ea**

## PLASTIC FOOT

Moulded in tough yet resilient plastic. Enables you to slide heavy equipment across most floors without damaging the floor. 37mm diameter, one screw fixing.  
Cat. HP-0830



1-9 10 or more

**60¢ 55¢**

## METAL CORNER FITTING

Similar to HM-3826 except that it is made out of pressed steel nickel plated. As used on road cases, vinyl covered amps, speakers etc. Will take massive punishment!  
Cat. HM-3822 (Not illustrated)

**ONLY \$1.75 ea 10 up \$1.55 ea**


## TILT-BASE FOR MONITORS

Now you can mount your monitor on a swivel/tilt base to maximise the viewing angle (and reduce glare) of your computer monitor.

Until now tilt bases were expensive or only fitted to expensive monitors. Now you can have one in your home for under \$30!!!

Cat. XM-4540

**NEW**

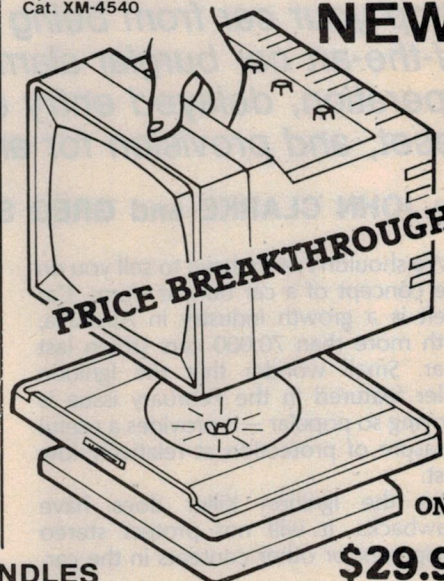

**ONLY**

**\$29.95**



## SON OF CHEAP VIDEO

This sequel to *The Cheap Video Cookbook* provides a complete video display system which you can build for as little as \$7. Likewise, transparency display can be created for under \$1 by using a video circuit called "The Snuffler" which is completely described in Chapter 2. This book makes cheap video even cheaper!  
224 Pages. 5 1/2 x 8 1/2, soft.

Cat. BS-0604 ..... **\$15.95**

**Jaycar**

Incorporating  
**ELECTRONIC AGENCIES**

**SYDNEY**

SHOWROOMS

117 YORK STREET - PHONE: (02) 264 6688 and (02) 267 1614

**CARLINGFORD**

TELEX: 72293

Cnr. CARLINGFORD & PENNANT HILLS ROAD - PHONE: (02) 872 4444

**CONCORD**

115 - 117 PARRAMATTA ROAD - PHONE: (02) 745 3077

**HURSTVILLE** 121 FOREST ROAD - PHONE: (02) 570 7900

## NUMBER 1 FOR KITS

POST AND PACKING CHARGES  
\$5 - \$9.99 (\$1.50) \$10 - \$24.99 (\$3.20)  
\$25 - \$49.99 (\$4.50) \$50 - \$99.99 (\$6.50)  
\$100 - \$199 (\$8.00) Over \$199 (\$10)

"Free INSURANCE for Road & Registered Post over \$200"

All heavy or bulky items (over 20kg.) sent Comet Road Freight \$12.00 anywhere in Australia.

SHOP HOURS CARLINGFORD, CONCORD & HURSTVILLE  
Mon - Fri 9am - 5.30pm: Sat - 9am - 12pm: Thurs night 8.30pm (Not Concord)

SHOP HOURS SYDNEY  
Mon - Fri 8.30am - 5.30pm: Sat - 8.30am - 12pm: Thurs night 8.30pm

MAIL ORDERS AND CORRESPONDENCE: P.O. Box 185, Concord, 2137



Mail Order  
By

**BANKCARD**  
Via Your Phone

**STOP PRESS!! NOW OPEN ALL DAY SATURDAY (CONCORD STORE ONLY)**



Keep thieves at bay: install our new

# *Deluxe Car Burglar Alarm*

*Stop your car from being stolen. This new state-of-the-art car burglar alarm features keyswitch operation, delayed entry and exit, automatic reset, and provision for an auxiliary battery.*

by **JOHN CLARKE** and **GREG SWAIN**

We shouldn't really have to sell you on the concept of a car burglar alarm. Car theft is a growth industry in Australia, with more than 70,000 cars stolen last year. Small wonder that the Ignition Killer featured in the February issue is proving so popular — it provides a useful measure of protection at relatively low cost.

But the Ignition Killer does have drawbacks. It will not protect stereo equipment or other contents in the car,

nor does it have an alarm to frighten the thief away. And while it will fool most joyriders, it will not stop a determined "professional" for too long.

By contrast, a properly designed and fitted car burglar alarm provides "front line" defence. It will sound an alarm if an attempt is made to gain access to the vehicle and this by itself is usually sufficient to deter the thief. Common practice is to add to the deterrent effect by fitting the vehicle with prominent

warning stickers and a flashing dash panel lamp.

When we described the Ignition Killer project, we were quick to point out the drawbacks of many commercial car burglar alarms. In particular, we pointed out that many could be disabled simply by cutting the horn wires from underneath the vehicle or by disconnecting the battery.

For sure, it's possible to install commercial alarms that will frustrate all but the most professional thief. The trouble is, they usually cost an arm and a leg. Most sell for between \$200 and \$400 fitted although there are units that you install yourself for around the \$100 mark.

The unit described here will set you back no more than about \$70 but that's not to say that it's a cheap and nasty design. On the contrary. It includes a range of features normally found only on expensive commercial units and has a few more tricks besides.


## **Ten commandments**

What features should be included to produce an effective car burglar alarm? In the "Open Road" for December 1983, the NRMA briefly surveyed a number of commercial units and gave a list of "Ten commandments". Let's take a look at these:

1. The alarm should protect all doors, bonnet and boot at least.
2. It should operate instantly when the boot is opened and when the bonnet lock is released.
3. Air horns or a siren should be used, rather than the car's horn.
4. The alarm should be set from inside the vehicle or by an electronic key — not by a key or tumbler switch from outside the vehicle.
5. Entry delay should be between five and 10 seconds.
6. The alarm should cut out the ignition system.
7. If the alarm obtains its power from the battery, the wiring should be direct





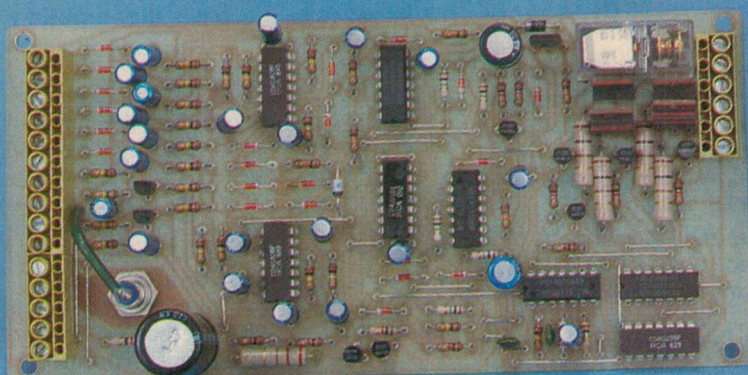

and should be positioned so that it cannot be reached from under the vehicle.

8. Horns or sirens, and the wiring to them, should be placed so that they cannot be tampered with through the grille or from under the vehicle.

9. The alarm duration should be about two minutes, with automatic cut-out and reset.

10. Window stickers should indicate that the vehicle is carrying an alarm system, but not the make or type.

The NRMA survey covered some 27 different alarm systems. Of these, the best units only complied with the first eight conditions.

By contrast, this new EA design can meet all the above requirements except for the sixth. We'll have more to say about that later. Other features include a flashing dash panel lamp, keyswitch operation, an auxiliary battery (optional), and provision for tow-away protection. It can protect external driving lights and will instantly trigger if the ignition is switched on or if the leads to the car's battery are cut (provided, of course, that an auxiliary battery is fitted).

### Inputs and options

The key to the versatility of this alarm is that the inputs are designed to detect a change of state. It does not matter

whether an input is normally pulled low or tied high, or whether the input is open circuit. If there is any change on the input (ie, from 0V to +12V or vice versa), the alarm will trigger.


There are eight inputs in all, two providing 10-second delayed triggering and six providing instantaneous triggering. The delayed inputs monitor the doors and an optional ultrasonic movement detector (to be described later), while the six instant inputs monitor the boot, bonnet, external driving lights, ignition system and the vehicle battery.

When triggered, the alarm drives a separate horn-type loudspeaker for a period of two minutes and causes the hazard lights to flash on and off. At the end of the two minute alarm period, the unit automatically resets and rearms itself.

Several different techniques are used to trigger the alarm. The doors are protected by monitoring the courtesy light switches, the bonnet by fitting a spring-loaded switch adjacent to the bonnet catch, and the boot by fitting a mercury switch to the bootlid (a measure that also provides protection against tow-away). The ignition and battery inputs simply detect the presence or absence of voltage, while the driving lights are protected by monitoring the filaments.

There are other options. For example, some readers may prefer to forget about tow-away protection and monitor the bootlid by making a connection to the switched side of the bootlight. Other readers might prefer to protect the bonnet using a reed switch and magnet assembly. It's really up to the individual as to just how inputs 1-6 are used.

*Below is the prototype alarm, ready for installation.*

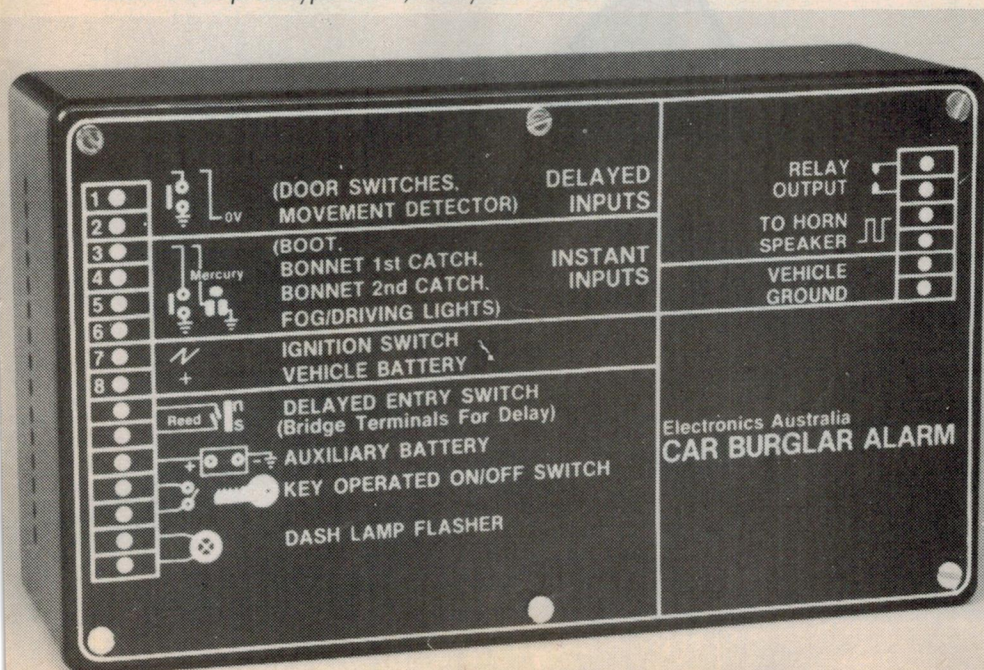



# Deluxe Car Burglar Alarm

What about the ignition cutout requirement referred to earlier? While we did not fit this feature directly to our car burglar alarm, we do recommend that readers also install the Ignition Killer. In fact, we believe this to be a far better scheme since the Ignition Killer can act independently as a last line of defence should the alarm be disabled.

## Easy operation

While it's nice to have a lot of fancy features, a good car burglar alarm must also be easy to use. This design meets that requirement. When leaving the vehicle, all the driver has to do is turn the alarm on using the key operated on/off switch. He then has 10 seconds to leave the vehicle during which time the dash panel lamp remains fully lit to indicate that all inputs are disabled.

At the end of the exit period, the dash panel lamp flashes to indicate that the alarm is armed.

Entering the vehicle is just as easy — for the driver, that is — although we have included a rather clever “wrinkle” in the delayed entry input circuitry. Essentially, the reader has two options.

The first option is to bridge two terminals on the alarm to provide for normal delayed entry. This gives the driver 10 seconds to open the car door and switch off the alarm. As before, the dash panel lamp remains fully lit during this procedure.

The second option is to fit a reed switch across the two terminals instead of linking them. The delay circuitry will now operate only if the reed switch is momentarily closed. If the switch is not closed, the alarm will trigger instantly when the car door is opened.

In practice, the reed switch can be glued to the inside of the windscreen immediately adjacent to the pillar or the dashboard. Or it could be hidden in the external mirror surround or some other suitable location. To enter the car, the driver simply uses a small magnet to momentarily close the reed switch. He then has 10 seconds to open the car door and switch off the alarm as before.

## How it works

At first glance, the circuit may seem quite complicated, comprising as it does eight CMOS ICs, 14 transistors, 25 diodes and associated components. But while there may seem to be quite a few components, the circuit can be simplified by breaking it down into six basic sections: input circuitry, alarm timer, delayed exit timer, delayed entry timer, dash lamp flasher, and horn speaker driver circuitry.

The action starts with the eight inputs

at the lefthand side of the circuit. As can be seen, these all have a fairly similar circuit configuration with each input circuit built around an exclusive-OR gate, or XOR gate for short.

Basically, the output of an XOR gate is high only when one input is high and the other is low, and is low otherwise. We have used this characteristic to derive a positive-going pulse whenever there is a change in the input state.

To achieve this, one input of each XOR gate is connected to the other input via an RC delay circuit consisting of a 100k $\Omega$  resistor and a 10 $\mu$ F capacitor. Thus, when the input signal changes state, one input of the XOR gate changes state immediately while the other is delayed from making this change until the 10 $\mu$ F capacitor charges to about 8V. The result is a positive-going 100ms output pulse.

Note that some of the 10 $\mu$ F capacitors are tied to the positive supply rail while the remainder are tied to ground. This was done to simplify the printed circuit board (PCB) layout and in no way alters the operation of the circuit.

Inputs 1-6 are all tied to the +12V rail via 100k $\Omega$  pullup resistors, while the 1 $\mu$ F capacitors provide decoupling to prevent false triggering. Normally, the trigger switches are open circuit and inputs 1-4 are held high. If a switch closes (as when a door is opened), the input is pulled low and the corresponding XOR gate produces a 100ms pulse.

Inputs 5 and 6 function in similar manner except that they are normally held low by the driving light filaments and are pulled high if the ground connection is broken. The corresponding XOR gate then produces a 100ms pulse as before. Diodes D1-D6 prevent damage to the XOR gates in the event that a positive voltage higher than their own supply is applied to the inputs.

Voltage sensing inputs 7 and 8 use transistors Q1 and Q2 to switch the inputs of XOR gates IC2d and IC2b between the high and low states. In the case of the ignition input (7), Q1 is normally off and the inputs to IC2d are high. When the ignition is switched on, Q1 turns on and pulls the input signal to IC2d low.


Q2 works in reverse fashion. It is normally biased on by the battery voltage but turns off if the battery leads are cut.

The outputs of IC1a and IC1b are fed to diode OR gate D7 and D8, and then applied to the data input of D-type flipflop IC3b. Likewise, the outputs IC1c-IC2d are connected to the data input of IC3a via diodes D9-D14. Note that both data inputs are normally tied low via a 10k $\Omega$  resistor.


Here's how this circuitry works. A D-type flipflop has two complementary outputs designated Q and  $\bar{Q}$ . When the Reset input is low, the Q output will follow the Data input at the positive edge of the clock waveform. In other words, if the Data input goes high, the Q output will also go high when the next positive going clock pulse is received.

IC3a is the alarm timer. Its clock signal is gated by IC4b which has its pin 5 input connected to  $\bar{Q}$ . Thus, when  $\bar{Q}$  is high, IC4b inverts the clock signal and passes it

*Alarm accessories (clockwise from top): barrel-type keyswitch, spring-loaded automotive switch, mercury switch, reed switch and bezel lamp.*

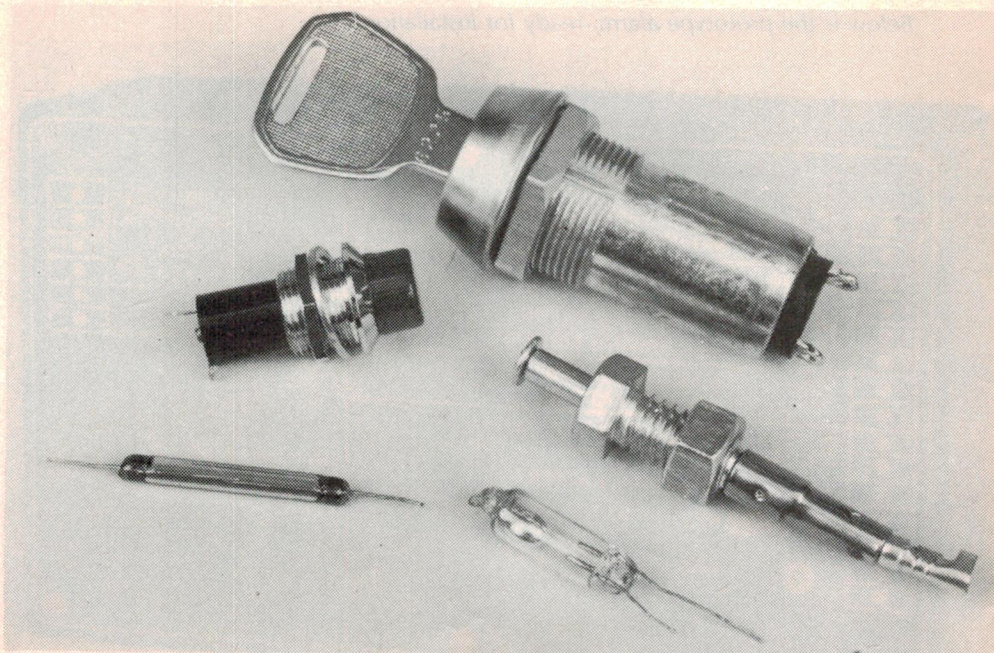




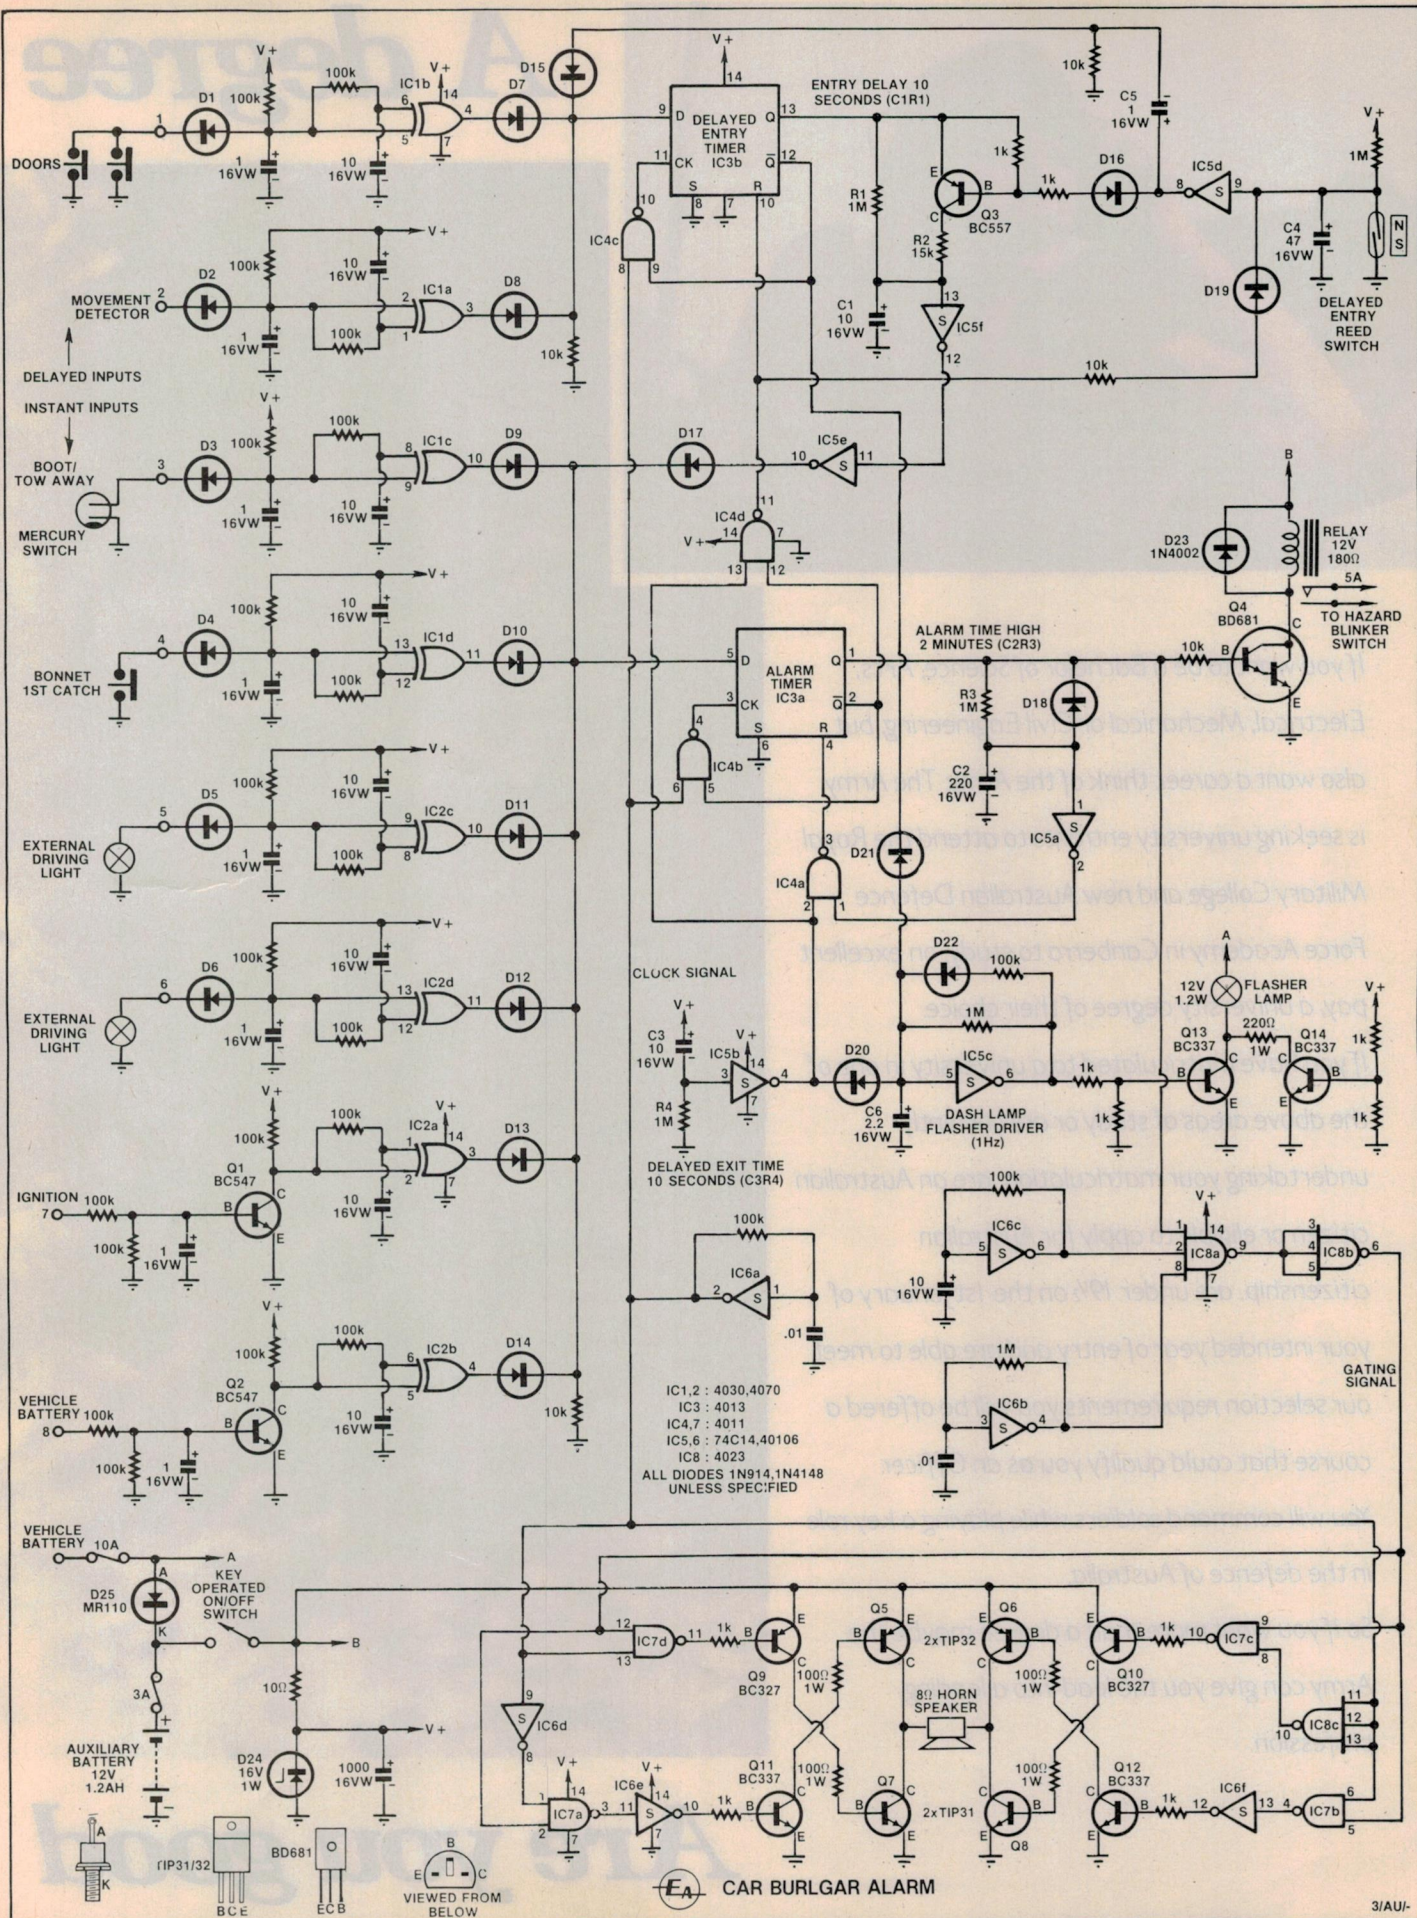



# *A degree*

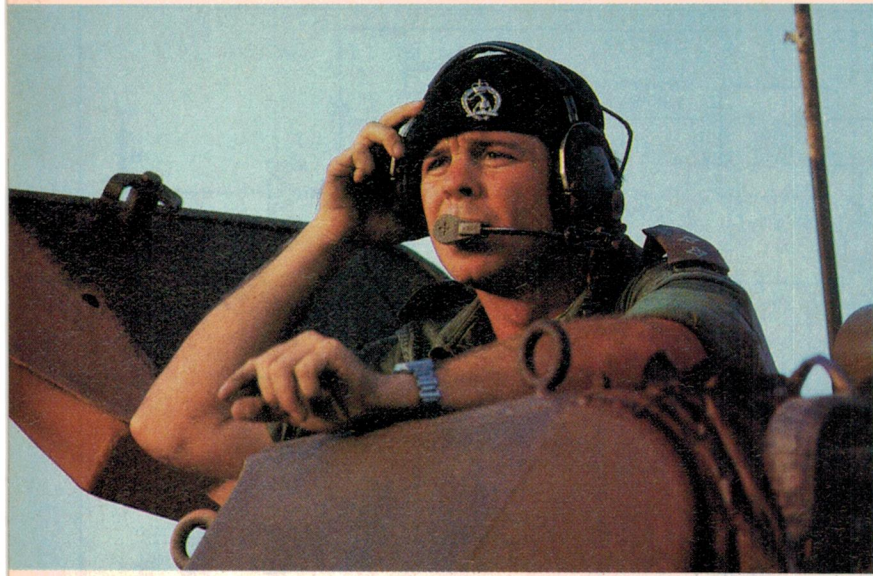

*If you want to be a Bachelor of Science, Arts, Electrical, Mechanical or Civil Engineering, but also want a career, think of the Army. The Army is seeking university entrants to attend the Royal Military College and new Australian Defence Force Academy in Canberra to study, on excellent pay, a university degree of their choice.*

*If you have matriculated to a university in one of the above areas of study or are currently undertaking your matriculation, are an Australian citizen or eligible to apply for Australian citizenship, are under 19½ on the 1st January of your intended year of entry and are able to meet our selection requirements you will be offered a course that could qualify you as an Officer.*

*You will command soldiers while playing a key role in the defence of Australia.*


*So if you want more than a degree maybe the Army can give you the lead into a leading profession.*



# *Are you good*



# *that leads to leading.*

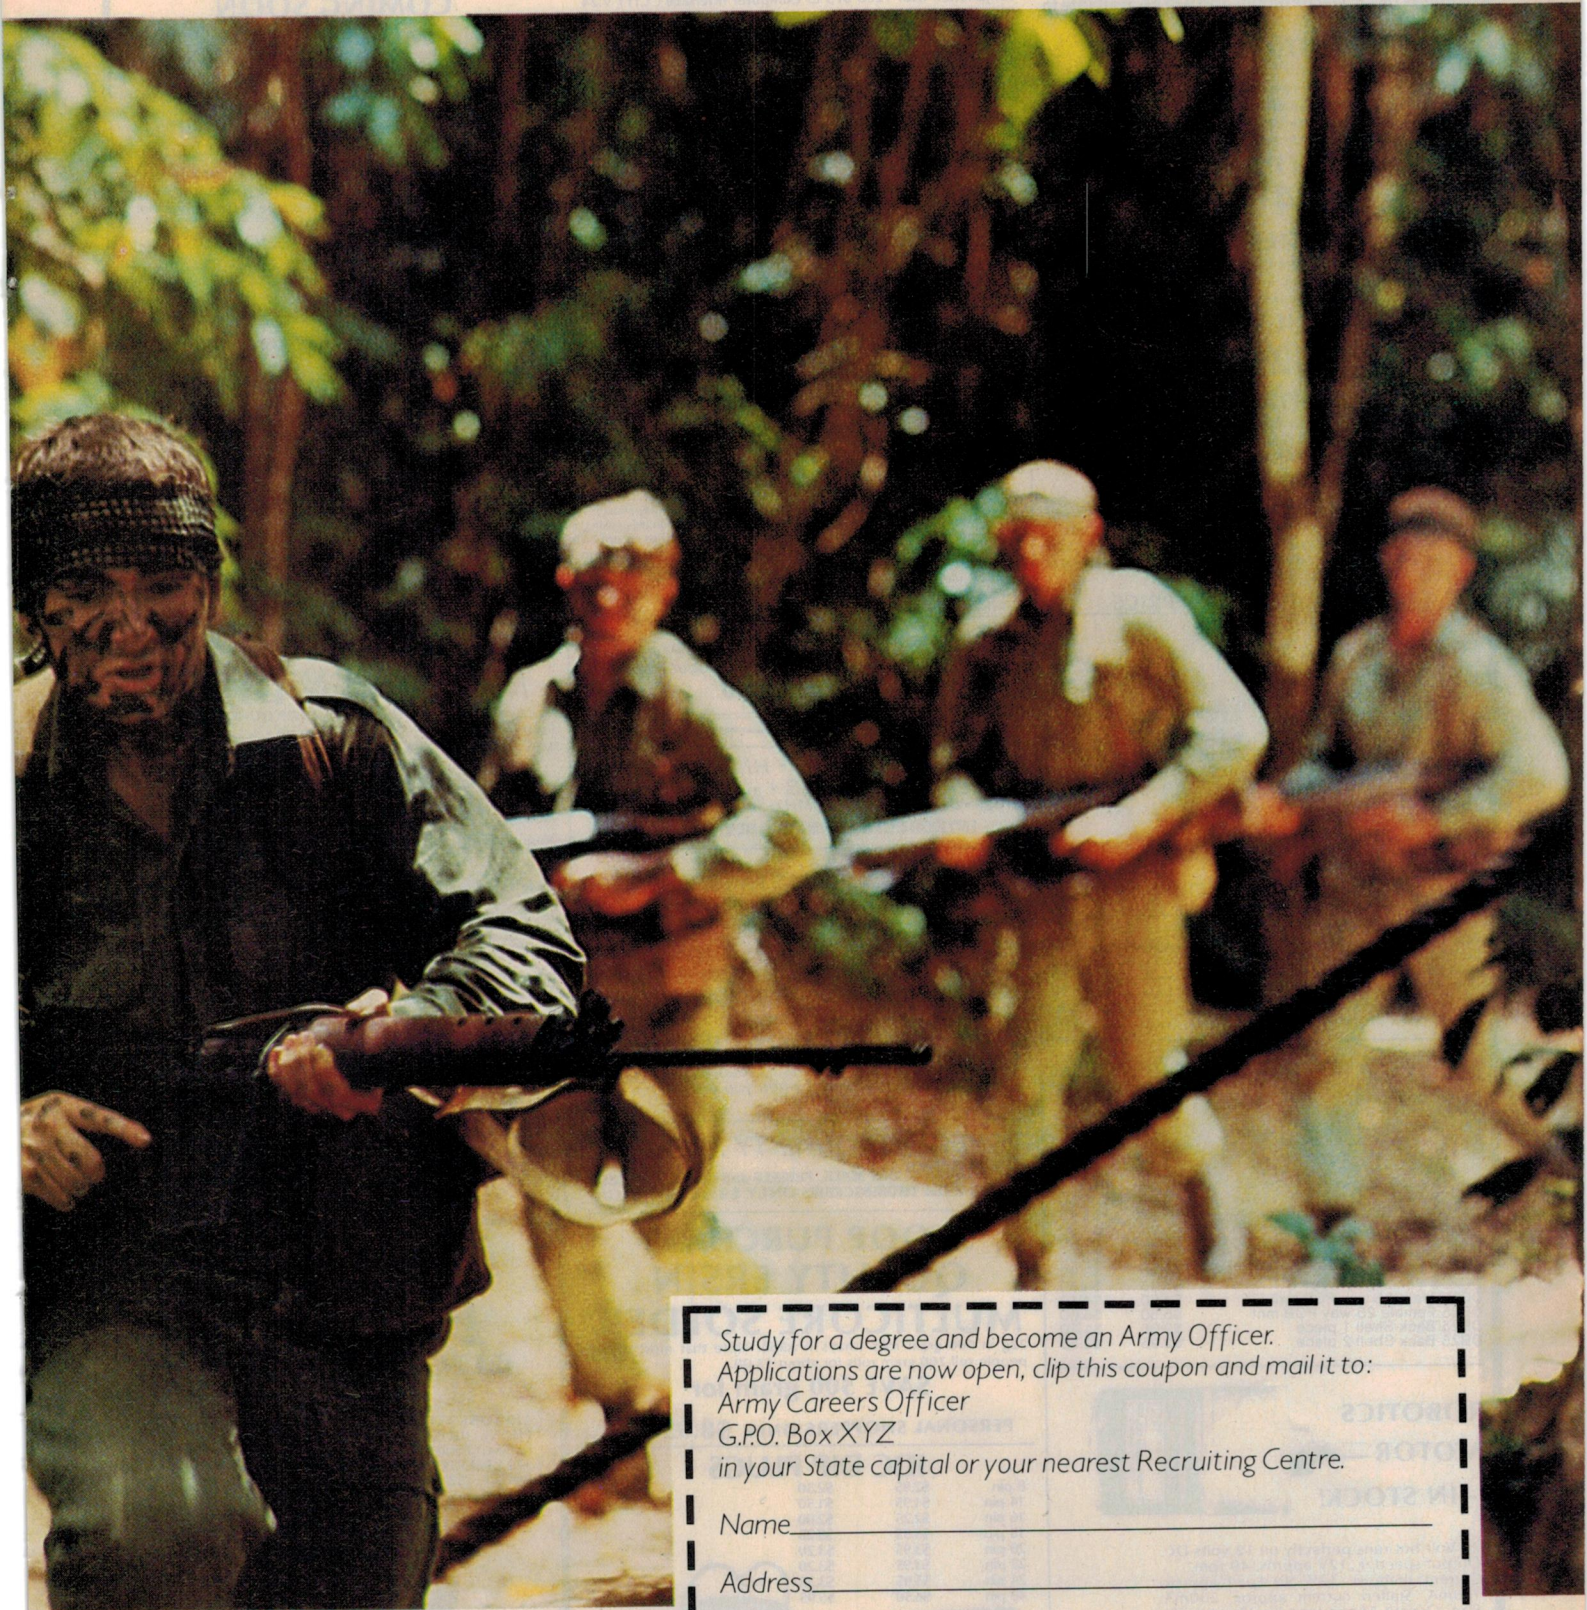

## *enough?*

Study for a degree and become an Army Officer.  
Applications are now open, clip this coupon and mail it to:  
Army Careers Officer  
G.P.O. Box XYZ  
in your State capital or your nearest Recruiting Centre.

Name \_\_\_\_\_

Address \_\_\_\_\_

Postcode \_\_\_\_\_

Birthdate \_\_\_\_\_

Authorised by the Director General of Recruiting, Department of Defence.

RMC 67 DPS 123





# AVTEK MULTI MODEM

The AVTEK MULTI MODEM is a completely Australian Designed and Manufactured Multi Standard Modem. It has been designed to meet current Telecom specifications (approval pending) and will be available in 4 different styles.

## KIT FORM

This is for the hobbyist and is not approved for connection to Telecom lines. It is ideal for private line use and for the Amateur Radio operators for Packet Radio (See review Electronics Australia January 1984). Complete kit to the last nut and bolt including pre-punched and silk screened front and back panels.

ONLY  
**\$249.00**

## MODEL MM2

This is a completely assembled and tested unit with a telephone hard wired into the Modem. It can be plugged legally into any phone socket to replace your standard phone.

## INTRODUCTORY PRICE

**\$329.00**

## MODEL MM3

This is basically the same as model MM2 but does not include the telephone but comes fitted with a data Telecom plug which means a dedicated socket must be installed by Telecom.

## CONTACT AVTEK FOR PRICE

## MODEL MM4

This unit is basically the same as model MM3 but does not have externally selectable Baud rate. The mode of operation is factory set. This is ideal for dedicated dial-up lines. This model also has hardware Auto Answer included.

## CONTACT AVTEK FOR PRICE

## SPECIFICATIONS FOR KIT, MM2, MM3 and MM4

☐ Data Standards CCITT V.21 & V.23, Bell 103 & 202 ☐ Data Rates 300, 600 and 1200BPS ☐ Backward Channel 75 BPS in conjunction with 1200 BPS ☐ Computer Interface CCITT V.24 (RS232C) ☐ Power Requirements 240V AC 3 watts ☐ Front Panel Controls Mode Switch (12 position rotary - not MM4). Connect switch (3 position toggle), Test Switch (3 position toggle) ☐ Front Panel Indications Connect LED, DCD Data Carrier Detect, RXD Received Data, RTS Request to Send, CTS Clear to Send, TXD Transmit Data, RING Ring Detect, TEST Switch off normal, POWER.

NOTE: Models MM2, MM3 and MM4 will not be available until Telecom approval has been obtained.

## COMING SOON MINI MODEM

Possibly the smallest Telecom approved (pending) Modem on the Australian market - includes phone. 300 Baud CCITT answer or originate (switchable), plugs into standard telephone socket and replaces standard phone. So small it can be mounted on your skirting board near phone socket.


## SPECIFICATIONS:

☐ 300 Baud CCITT answer or originate ☐ Power 12V AC plug pack supplied ☐ Includes telephone with last number re-dial.

**\$189.00**

## MULTIPROM KIT

- BACK IN STOCK

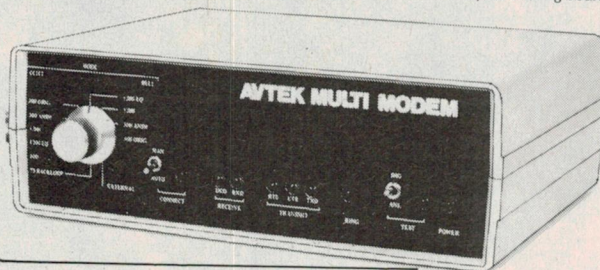

The Multiprom board is an extension of the Microbees memory in ROM. It simply plugs into the fifty way bus expansion port on the core board. It fits either neatly inside the Microbee or behind it, using the Microbee's own power supply.

The board takes the EDASM and NET eeprom normally residing inside the Microbee, but allows several different sets to fit in: Editor-Assembler, Wordbee, Logo, MiniPascal, Networkrom, Bemon or your own program. It has room for 4 sets of eeproms in the EDASM location and 3 sets of eeproms in the NET location, a total of 44K of eeprom. The board can be simply daisy chained with up to 6 slave boards (using an outside power supply in this case), allowing a maximum total of 308K in ROM. The EDASM locations accept either type 2532 or 2764 eeproms and they can be mixed. Another powerful feature of the board is the input/output system. 11 outputs, open collector transistor driven. Each can turn ON or OFF a relay under program control. 8 inputs, buffered and protected can read 8 switch status - ideal for computer controlling of model trains, alarm systems, tape recorders, machinery etc. The Avtek kit includes a plated through board plus all components to make this exciting project. There is also provision on the board to change the address of the ports used for eeprom selection and input/output.

ONLY  
**\$99.00**



## NEW - ELECTROLUBE NOW IN STOCK

Silicon Compound 340g aerosol	\$5.95
Freezer Spray 340g aerosol	\$5.50
Clear Protective Lacquer 397g aerosol	\$6.95
Electronic Cleaning Solvent 340g aerosol	\$6.50
Degreasing Solvent 454g aerosol	\$5.95
Antistatic Foam 397g aerosol	\$5.50
A.F. Spray 454g aerosol	\$7.95
Heat Transfer Compound 25g syringe	\$4.00

## "D" CONNECTORS

	1-10	10 up
DE9S Male 9 pin	\$2.50	\$2.20
DE9S Female 9 pin	\$2.95	\$2.70
DE9 Male 9 pin PCB mnt	\$3.25	\$3.10
DE9 Female 9 pin PCB mnt	\$3.95	\$3.75
DE9 Back Shell 1 piece	\$2.00	\$1.80
DE9 Back Shell 2 piece	\$2.95	\$2.50
DA15P Male 15 pin	\$2.95	\$2.50
DA15S Female 15 pin	\$3.50	\$3.00
DA15 Male 15 pin PCB mnt	\$3.95	\$3.75
DA15 Female 15 pin PCB mnt	\$4.95	\$4.60
DA15 Backshell 1 piece	\$2.00	\$1.80
DA15 Back Shell 2 piece	\$2.95	\$2.50
DB25P Male 25 way	\$4.50	\$3.95
DB25S Female 25 way	\$4.95	\$4.50
DB25 Male 25 way PCB mnt	\$4.50	\$4.10
DB25 Female 25 way PCB mnt	\$5.50	\$5.00
DB25 Back Shell 1 piece	\$2.00	\$1.80
DB25 Back Shell 2 piece	\$2.95	\$2.50

## ROBOTICS

## MOTOR


- IN STOCK!



24 Volt but runs perfectly on 12 volts DC. Output speed @ 12V approx. 40 rpm. Current drain @ 12V No Load approx. 100mA. Stalled current approx. 200mA. Size: Overall 55mm long by 35mm wide. Shaft length 20mm and shaft diameter approx. 4mm.

MADE BY CANNON OF JAPAN  
ABOUT 30% OF NORMAL PRICE  
SAVE - BUY 4 UNITS FOR \$35 OR  
ONLY \$9.99 EACH

## THERMISTOR SPECIAL 56R Philips type 2232-660-91009 - refer to Philips Catalogue for specs. 10 FOR \$1.00



## NEW PRODUCT - HI RESOLUTION 9" VIDEO MONITORS - available in Amber or Green - Bandwidth over 20MHz - Ideal for the MicroBee INTRODUCTORY PRICE ONLY \$279 ea

## WE NOW STOCK A LARGE RANGE OF SCOPE products and spare tips and elements

IEC 320 MAINS LEADS - DON'T PAY  
\$4.00 OUR PRICE ONLY \$1.99 each  
IEC 320 CHASSIS SOCKET WITH BUILT-IN  
MAINS SUPPRESSOR - ideal for micro projects  
ONLY \$15.00 - Special this month  
ONLY a FREE IEC 320 mains lead with each filter  
purchased - just mention it when you order.

## SPECIAL - QUALITY FRENCH BRAND - D25 MALE, FEMALE and QUALITY 2 PIECE COVER WITH THUMBSCREWS ONLY \$9.99 - \$15 VALUE

## SCOOP PURCHASE QUALITY ERSIN MULTICORE SOLDER

22g in 500 gram rolls (that's 1/2 kilo!). Note that most other people sell 200 gram rolls for about \$5.00.

## SAVE 500 gram for

PERSONAL SHOPPERS ONLY \$8.95

## IDC DIP PLUGS

8 pin	\$2.95	\$2.50
14 pin	\$1.95	\$1.50
16 pin	\$2.25	\$2.00
18 pin	\$3.95	\$3.20
20 pin	\$3.95	\$3.20
22 pin	\$3.95	\$3.20
24 pin	\$3.95	\$3.20
40 pin	\$6.50	\$5.95



## NEW PRODUCT

## MEMOREX DISCS

We have just received shipments of TOP QUALITY MEMOREX diskettes into stock.

EVERY DISC HAS EVERY SECTOR OF EVERY TRACK CERTIFIED  
100% ERROR FREE!

5 1/4" Note double density can be used as single density.

Single sided/double density ..... **\$4.95**  
Double sided/double density ..... **\$5.50**  
8"

Single sided/double density ..... **\$5.95**  
Double sided/double density ..... **\$6.50**


NOTE: That these prices are cheaper than some people charge for inferior discs.



**AVTEK**  
(ELECTRONICS) Pty. Ltd.

## TWO GREAT LOCATIONS

119 YORK STREET, SYDNEY 2000  
PHONE: (02) 267 8777  
(Above Charlie Browns Place)  
172 LIVERPOOL ROAD (HUME HIGHWAY), ENFIELD  
PHONE: (02) 745 2122  
All Correspondence to:  
P.O. BOX Q302, QUEEN VICTORIA BUILDING,  
SYDNEY 2000




## POST AND PACKING

Divide the value of your order by 20 (5%) to get post and packing value and then add \$2.00 - it's that simple!

All Bankcard orders can only be sent to a normal address (NOT a P.O. Box). All Bankcard orders will be sent by registered mail (add \$3 to P&P charges).

ENFIELD OPEN ON SUNDAY



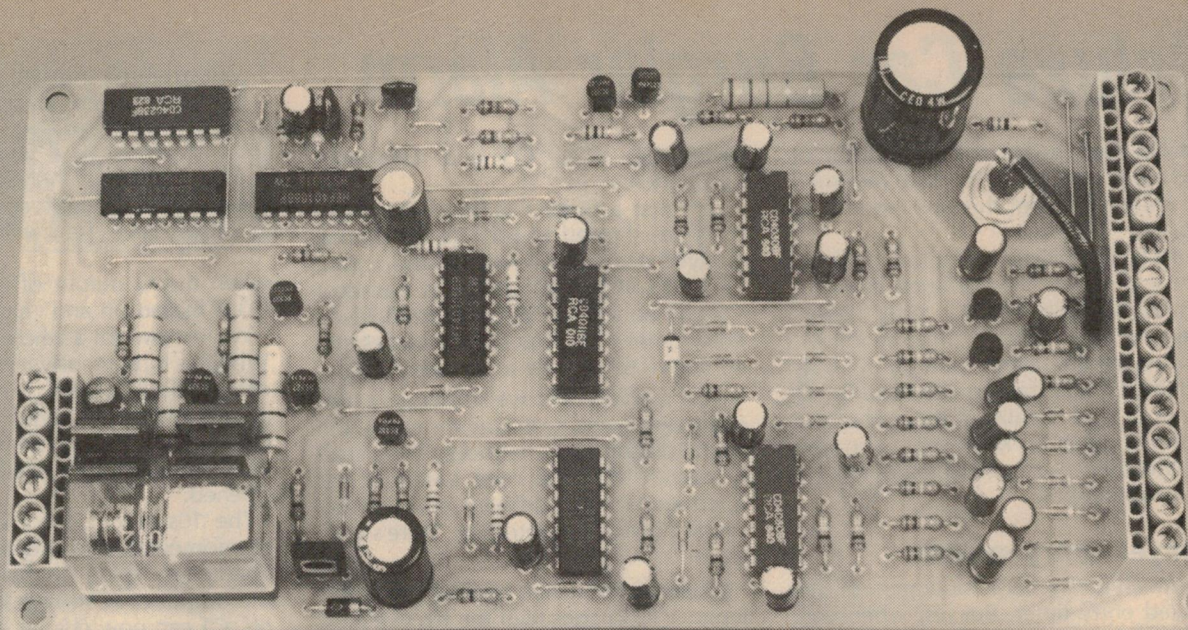

## Deluxe Car Burglar Alarm

to IC3a's Clock input (pin 3). Now comes the tricky bit. When the Data input (pin 5) goes high (ie, when an input is triggered),  $\bar{Q}$  goes low and the output of IC4b goes high.

What this now means is that the Q and  $\bar{Q}$  outputs will not be affected when the Data input subsequently goes low after 100ms, since no further clock pulses can reach IC3a. The flipflop thus remains latched with Q and  $\bar{Q}$  high and low respectively.

The high Q output of IC3a is used to gate on (via IC8a) the horn speaker driver circuit to sound the alarm. At the same time, it charges capacitor C2 via resistor R3. After about two minutes, the voltage across C2 reaches a level sufficient to switch Schmitt trigger IC5a to a low output.

Since pin 2 of IC4a is normally high, it

follows that pin 3 of IC4a will also now go high. This resets IC3a to its normal state with Q low and  $\bar{Q}$  high, thus switching off the alarm at the end of the two minute period. At the same time, diode D18 rapidly discharges C2, pin 3 of IC4a goes low, and pin 5 of IC4b goes high, thus allowing clock pulses through to the Clock input.

The circuit is now re-armed, ready for the next 100ms pulse on the Data input.

Note that if it were not for D18, C2 may not be fully discharged before the next trigger input. Depending on the circumstances, this could result in an alarm time that was considerably shorter than two minutes.

### Delayed entry timer


IC3b is the delayed entry timer and functions in similar fashion to IC3a. In-

itially, Q is low,  $\bar{Q}$  is high and clock pulses are gated through IC4c to the Clock input (pin 11). When a positive-going pulse is applied to the Data input, the Q output goes high and  $\bar{Q}$  goes low to stop the clock pulses as above.

Assuming for the moment that transistor Q3 is off, C1 now charges via R1. After about 10s, the voltage across C1 reaches the trigger threshold of Schmitt trigger IC5f. The output of IC5e then switches high and applies a positive voltage to the Data input of IC3a which then functions exactly in the manner described above.

The result of all this chicanery is that the alarm again sounds for two minutes but only after a 10s delay.

IC3b is reset using IC4d. When  $\bar{Q}$  of IC3a goes low, the output of IC4d goes high and Q and  $\bar{Q}$  of IC3b are forced low and high respectively. IC3b is held in this state for the duration of the alarm time. At the end of the alarm time,  $\bar{Q}$  of IC3a

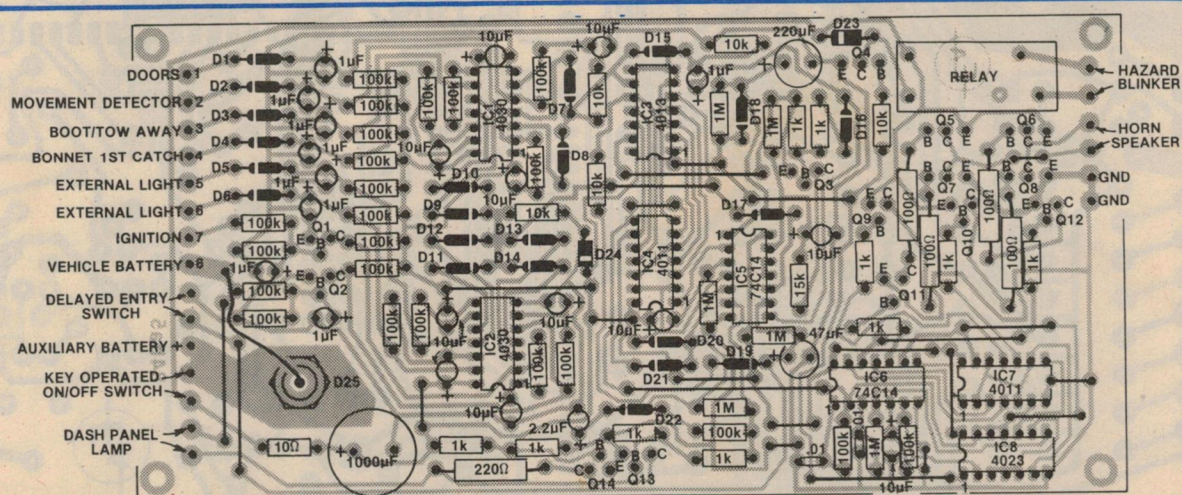



# Deluxe Car Burglar Alarm

switches high again and the output of IC4d goes low. IC3b is now re-armed and ready to accept the next input to its Data pin.

If that's all a bit too much for you, consider it this way. The delayed entry inputs trigger IC3b which in turn triggers IC3a after a 10s delay. During the following two-minute alarm period, IC3b is held in the reset state by IC4d and the  $\bar{Q}$  output of IC3a. Finally, at the end of the alarm period, both Reset inputs go low and the alarm is re-armed ready for the next trigger input.

## Delayed entry switch

So much for the basic operation of the delayed entry timer. But just when you think you've got it all figured out, we now inject a complicating factor: the delayed entry switch circuit. This com-

prises C4, IC5d, Q3 and associated components.

Let's first assume that the switch contacts are shorted to provide for normal delayed entry. It follows that the output of IC5d will be high and thus transistor Q3 will be off. In this case, the delayed entry timer functions exactly as described above to provide a 10s entry delay.

Now suppose that we substitute a normally open reed switch as shown on the circuit diagram. Furthermore, let's initially assume that the reed switch is left open circuit. The delayed entry switch circuit now comes into play. Here's how it works.

When power is first applied, the Reset input of IC3b goes high for 10s (we'll explain why later) and quickly charges C4 to +12V via the 10k $\Omega$  resistor and D19. Thus, the output of IC5d goes low. Now

We estimate that the cost of parts for this project is approximately

**\$70**

This includes the horn speaker but not the cost of an auxiliary battery or extra switches.

when the Q output of IC3b goes high, Q3 is biased on and charges C1 via R2.

We've now got a whole new ballgame. Whereas it previously took 10s for C1 to charge via R1 (1M $\Omega$ ), it now only takes about 150ms to charge via Q3 and R2 (15k $\Omega$ ). So, as far as the thief is concerned, the alarm triggers instantly if a door is opened.

The 10s entry delay can be activated by momentarily closing the reed switch. This action rapidly discharges C4, forcing the output of IC5d high and turning Q3 off. C1 can now charge only via R1 and so the 10s delay is restored.

But that's not the end to the electronic skullduggery. When the output of IC5d switches high, a short positive-going pulse is applied to the Data input of IC3b via C5 and D15. This triggers the delayed entry timer which means that the alarm will sound 10s after the reed switch is closed.


So it doesn't matter whether or not a door is opened after the reed switch is closed. The alarm will still sound after a 10s delay (unless, of course, the driver enters the car and switches the alarm off).

## Delayed exit timer

Schmitt trigger IC5b forms the delayed exit timer. When power is first applied, C3 pulls pin 3 high and the output (pin 4)

## Specifications:

Inputs .....	Two delayed, six instant
Delay times .....	10 seconds delayed exit, 10 seconds delayed entry
Power supply .....	+12V from vehicle battery with provision for auxiliary battery backup
Alarm time .....	Two minutes with automatic re-arming at end of alarm time
Alarm output .....	1kHz tone modulated at 100Hz and 1Hz driving an 8 $\Omega$ horn speaker
Current consumption ..	13mA standby mode, 500mA when alarm is triggered
Miscellaneous .....	Flashing dash panel lamp, key-operated on/off switch, provision for tow-away protection

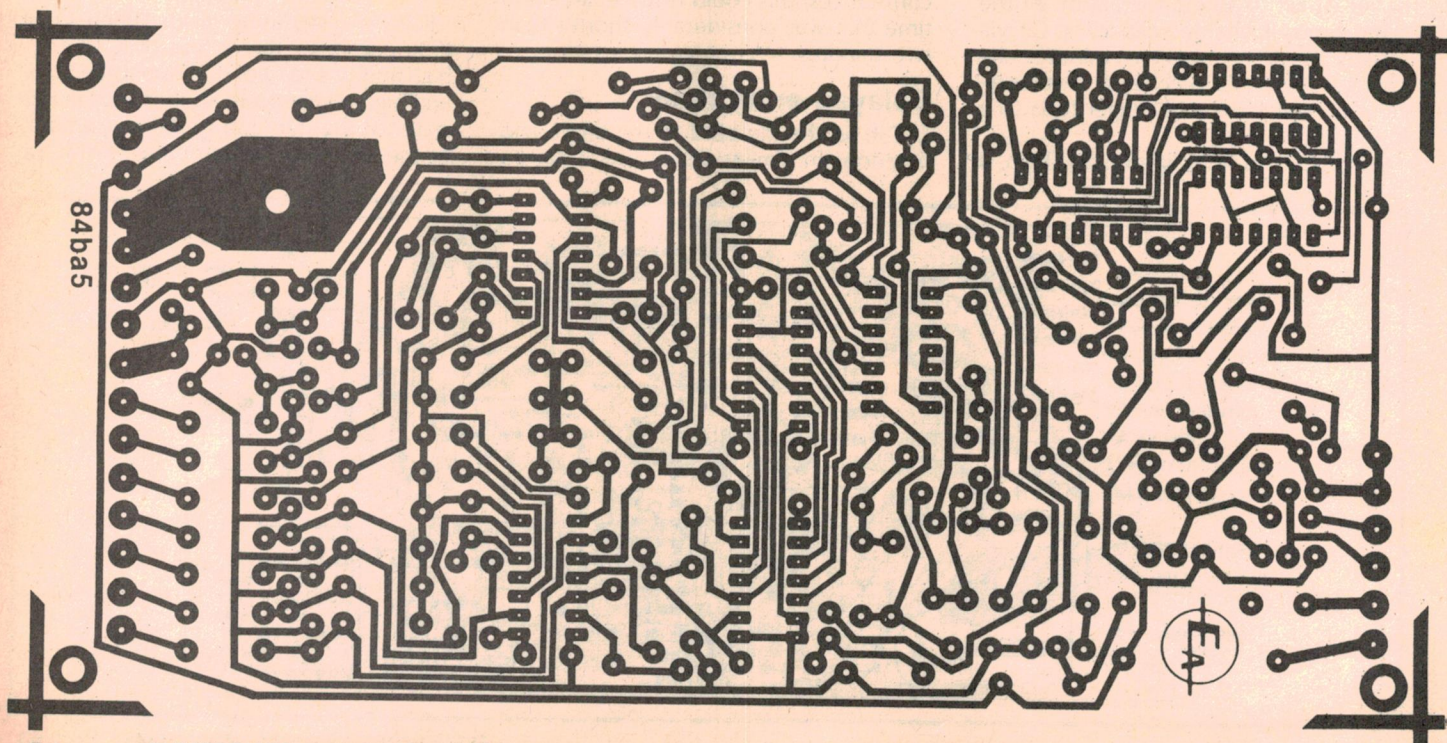



# BIRKENHEAD ELECTRONICS

THE MOST comprehensive range of Altronic Products  
outside of Western Australia.

## FT-5000 Dot Matrix Printer


Low-cost and reliable  
with graphic capability  
Elite, Pica typefaces  
Enhanced with selectable  
62 characters memory capacity  
100 CPS & MUCH MORE

FOR

VERY

LITTLE WAS \$550

NOW **\$499.50**

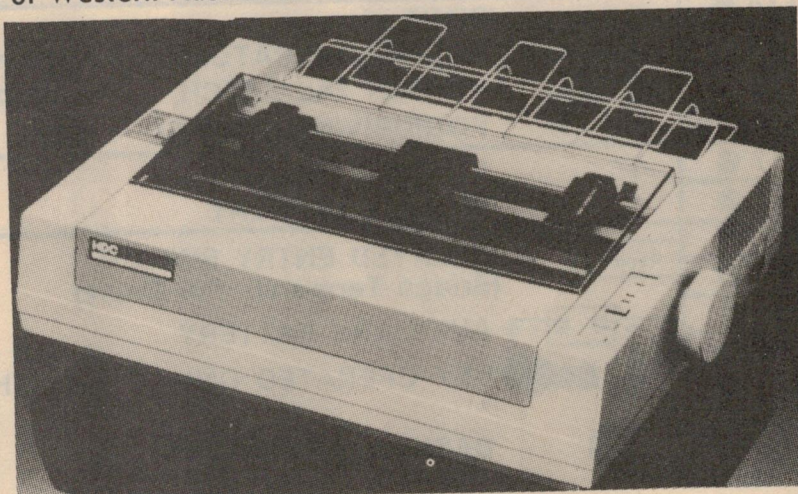

## VIDEO AMPLIFIERS

Video has been booming for quite a while,  
finally a range of video accessories in kit  
form.

Two video amplifiers for both VCR and  
Computer use, a brand new Video  
Enhancer and our popular VCR Stereo  
Synthesizer. All four represent out-  
standing value for money and all are  
assembled with Altronic's Extra Care.



### SINGLE OUTPUT

#### INVERSE AND NORMAL OUTPUT


Brilliant new kit from EA, **Super cheap** and **Super Effective**. Whilst our K5830 is suitable primarily  
for VCR use this video amplifier is best suited to  
use with computers. The EA documentation sup-  
plied is extremely well written and provides  
details for installation into television sets.

**NO MORE SMEARY COLOURS, SIGNAL BEATS OR  
RF INTERFERENCE**

**NOTE \* NOT SUITABLE FOR USE WITH LIVE CHASSIS  
TV SETS.**

K 5850 ..... **\$14.95**

## VIDEO ENHANCER

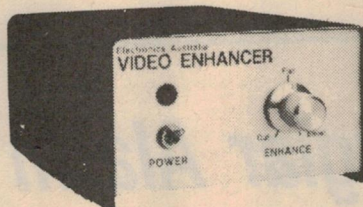

Here's a **simple** but **effective** Video Enhancer that  
is super **easy to build** at a fraction of the cost of  
commercial models.  
Unit sharpens picture detail, and can actually  
improve the quality of a copy by amplifying the  
top end of the video signal.

### AT LAST A VIDEO ENHANCER KIT

K 5825 ..... **\$35.00**

## VELOSTAT

Non-static sheeting for storing  
CMOS IC's, LSI's etc. 1000  
times better than aluminium foil.  
will store up to 150 IC's on one  
225 x 150mm sheet.

H 0600

**\$3.50 per sheet**

## TRANSISTOR ASSISTED IGNITION WITH DWEEL EXTENSION



The **ALTRONICS** Kit includes all components for  
the modifications, detailed by Electronics  
Australia February 1983.

Yes, it's bad enough paying \$2.00 a gallon for petrol  
without wasting a fortune on an out of tune engine.  
Fit this transistor assisted ignition kit in minutes and  
start saving money from the very next petrol stop.

**Easy to Build!**

K 4010 ..... **\$35.00**


THE COMPUTER YOU HAVE BEEN WAITING FOR HAS FINALLY ARRIVED  
THE MOST POWERFUL, FLEXIBLE AND BUSINESSLIKE MACHINE IN ITS CLASS  
★★★★★★ THE EXCALIBUR 64 IS HERE ★★★★★★

# BIRKENHEAD ELECTRONICS

SHOP 71 QUAY WEST ARCADE  
BIRKENHEAD POINT  
PHONE: 81-4077  
OPEN 7 DAYS





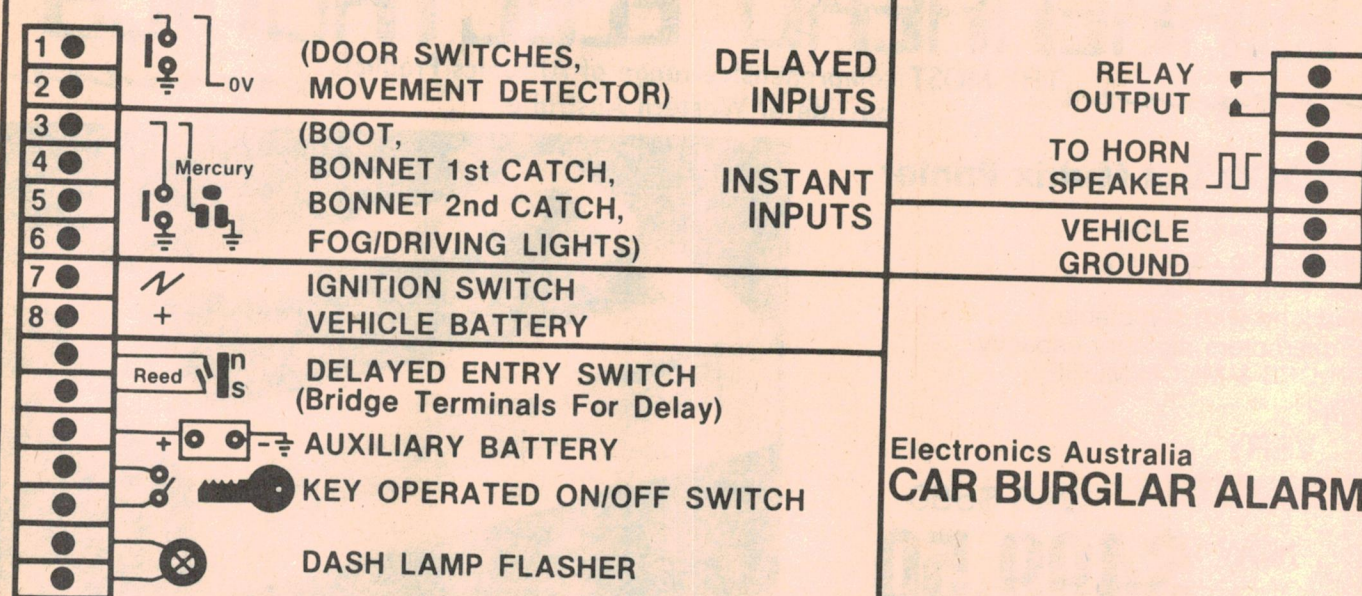

## Deluxe Car Burglar Alarm

goes low. Pin 2 of IC4 and pin 13 of IC4d are thus also pulled low, which means that the Reset inputs of IC3a and IC3b are held high.

C3 now charges via R4 and, after about 10s, switches the output of IC5b low. The Reset inputs of IC3a and IC3b also now go low and the alarm is armed and ready for action.

IC5c is wired as a Schmitt trigger oscillator and drives transistor Q13 and the dash panel lamp. Notice that IC5c has two feedback paths connected between pins 5 and 6: one via the 1M $\Omega$  resistor and the other via the 100k $\Omega$  resistor and diode D22. When pin 6 is high, C6 quickly charges via both feedback paths. However, when the output is low, D22 is reverse biased and C6 can discharge only through the 1M $\Omega$  resistor.

The output of IC5c thus has a 1:10 duty cycle which means that the lamp turns on for 100ms once every second (ie, the lamp flashes at a 1Hz rate). Transistor Q14 is permanently biased on and, together with its 220 $\Omega$  collector resistor, provides a 50mA standing current path through the lamp. This measure is designed to extend lamp life by ensuring that the filament is kept just above the point of incandescence.

Diodes D20 and D21 have no effect on

the circuit except during the delayed entry and exit times. During the delayed exit time, for example, the output of IC5b is low and thus pin 5 of IC5c is held low by D20 which is now forward biased. The output of IC5c will therefore be high and so the dash lamp remains fully lit for the duration of the exit time.

At the end of the exit time, pin 4 of IC5b goes high, D20 is reversed biased, and the dash lamp circuit commences normal operation.

Similarly, pin 5 of IC5c is held low via D21 and the  $\bar{Q}$  output of IC3b during the delayed entry time.

### Horn speaker driver

As mentioned previously, the alarm sounds when the Q output of IC3a goes high. The horn driver circuit has been devised so that it draws very little current in the quiescent state.

Let's assume that the alarm has been triggered and that the Q output of IC3a has gone high. This does two things: it applies a gating signal to 3-input NAND gate IC8a and it turns on Darlington transistor Q4. Q4, in turn, drives a single pole relay with output contacts connected in parallel with the hazard flasher switch.

D23 protects the transistor against

back EMF from the coil when the relay turns off.

The remaining two inputs of IC8a are connected to the outputs of Schmitt trigger oscillators IC6b and IC6c. The first oscillator operates at about 100Hz while the latter has a nominal output of 1Hz. When Q of IC3a is high, their outputs are gated through to the output of inverter IC8b and form the gating signal for the horn speaker driver circuit.

This gating signal is connected to one input of NAND gates IC7a, b, c and d. When the gating signal is low, the NAND gate outputs are high and transistors Q7, Q8, Q9 and Q10 are off. IC6e and IC6f invert the outputs of IC7a and IC7b, and so Q5, Q6, Q11 and Q12 are also off.

When the gating signal goes high, a 1kHz tone signal for the horn speaker is gated through to the transistor driver stages by the IC7 NAND gates. This 1kHz tone signal is generated by Schmitt trigger oscillator IC6a which, incidentally, also provides clock signals for IC3a and IC3b. Note that the 1kHz signal is inverted before it is applied to IC7a and IC7c.

The transistor driver stage operates in push-pull mode. When the output of IC6a goes high, the output of IC6f also goes high and turns on transistors Q12 and Q6. At the same time, the output of IC7d goes low and turns on transistors Q9 and Q7. One side of the horn speaker thus goes to the positive supply



rail while the other goes to ground.

Similarly, when the output of IC6a goes low, Q6, Q7, Q9 and Q12 all turn off and Q10, Q8, Q11 and Q5 turn on. In this manner, each side of the horn speaker is switched at a 1kHz rate from one polarity to the other.

This 1kHz tone is modulated at 100Hz by IC6b, while IC6c switches the tone on and off at a 1Hz rate (ie, on for 0.5s and off for 0.5s). The result is an ear-piercing alarm tone that's sure to attract attention.

## Power supply

Power for the alarm circuit is derived from the vehicle battery and also from the optional auxiliary battery. Note that the auxiliary battery is charged via D25. This diode prevents the auxiliary battery from discharging into the vehicle battery should the latter go "flat".

Supply line decoupling is provided by a 10 $\Omega$  resistor and a 1000 $\mu$ F capacitor, while zener diode D24 protects the circuit from voltage spikes. Short circuit protection is provided by fusing the vehicle and auxiliary battery supply lines to 10A and 3A respectively.

## Construction

Construction of the Car Burglar Alarm is a heck of a lot easier than understanding how it works. All the parts are mounted on a PCB coded 84ba5 (88 x 181mm) and this is housed in a plastic zippy case measuring 190 x 60 x 110mm. A Scotchcal front panel gives the unit a professional appearance as well as providing a legend for all the external wiring connections.

Begin construction by installing the 22 wire links, then mount the diodes, resistors and capacitors. Note that the diodes and electrolytic capacitors must be mounted with due regard to polarity so check your work carefully as you proceed. The diode type numbers can be gleaned from the circuit diagram.

Diode D25 is a 10A stud-mounting type and should be screwed securely to the PCB using the nut and lockwasher supplied. The anode terminal is then connected to the PCB using 1mm-thick tinned copper wire. This lead should be insulated with spaghetti tubing.

The transistors can be mounted next and should be pushed down onto the PCB as far as they will comfortably go. As with the diodes, you will have to refer to the circuit diagram for the type numbers. Make sure that you install the transistors the right way round.

External connections to the alarm are handled by PCB-mounting terminal blocks. A 6-way section is installed adjacent to the relay while 5-way and 10-way sections are mounted at the other end of the PCB adjacent to the input diodes.

## PARTS LIST

1 PCB, code 84ba5, 88 x 181mm  
1 plastic zippy case, 190 x 110 x 60mm  
1 12V single pole relay, 180 $\Omega$   
1 8 $\Omega$  horn speaker  
1 Scotchcal front panel, 190 x 108mm  
1 10-way PCB-mounting terminal block  
2 6-way PCB-mounting terminal blocks  
1 barrel-type keyswitch  
1 12V bezel lamp (red)  
1 reed switch and magnet set  
4 12mm standoffs  
1 mercury switch  
1 spring-loaded automotive switch  
1 12V motorcycle battery, 1.2Ah capacity or greater (optional)  
1 3A fuse  
1 10A fuse  
2 in-line fuseholders  
**Semiconductors**  
2 4011 quad 2-input NAND gates  
1 4013 dual D flipflop  
1 4023 triple 3-input NAND gate  
1 4030, 4070 quad 2-input XOR gate  
2 74C14, 40106 hex Schmitt triggers

1 BC557 PNP transistor  
2 BC547 NPN transistors  
4 BC337 NPN transistors  
2 BC327 PNP transistors  
1 BD681 NPN Darlington transistor  
2 TIP31 NPN transistors  
2 TIP32 PNP transistors  
1 1N4002 100V diode  
1 MR110 10A 100V diode  
1 16V 1W zener diode  
22 1N914, 1N4148 diodes

### Capacitors

1 1000 $\mu$ F/16VW PC electrolytic  
1 220 $\mu$ F/16VW PC electrolytic  
1 47 $\mu$ F/16VW PC electrolytic  
11 10 $\mu$ F/16VW PC electrolytic  
1 2.2 $\mu$ F/16VW PC electrolytic  
9 1 $\mu$ F/16VW PC electrolytic  
2 .01 $\mu$ F metallised polyester

### Resistors (1/4W, 5% unless stated)

6 x 1M $\Omega$ , 23 x 100k $\Omega$ , 1 x 15k $\Omega$ , 5 x 10k $\Omega$ , 10 x 1k $\Omega$ , 1 x 220 $\Omega$  1W, 4 x 100 $\Omega$  1W, 1 x 10 $\Omega$

### Miscellaneous

Hookup wire, tinned copper wire, automotive connectors, machine screws and nuts, shakeproof washers, warning stickers, solder, etc.

Assembly of the PCB can now be completed by installing the CMOS ICs and the relay. Note that all the ICs are CMOS devices so solder the supply pins (7 and 14) first to enable the internal static protection diodes. The hazard flasher relay can be regarded as optional — if you want to save a few dollars it can be deleted from the circuit along with Q4 and D23.

Finally, the Scotchcal label can be affixed to the lid, the various holes drilled in the case, and the PCB mounted on 12mm standoffs. Use shakeproof washers under all mounting nuts, as this project will be subject to a good deal of vibration.

## Testing

The test procedure is as follows:

- switch on the alarm and check that the dash panel lamp remains fully lit for 10s. Check that none of the inputs can trigger the alarm during this 10s exit time.
- check that the dash panel lamp flashes at the end of the exit time and that all inputs now instantly sound the alarm. Inputs 1-6 can be test triggered by momentarily shorting them to ground; input 7 by applying +12V to the input; and input 8 by shorting the base of Q2 to ground.
- check that the alarm sounds for about two minutes when triggered and that the relay closes.

● check that the alarm sounds after a 10s delay if the reed switch terminals are momentarily shorted.

● short the reed switch terminals permanently and check that the delayed trigger inputs sound the alarm after a 10s delay (the entry time). Check that the dash panel lamp is fully lit during the 10s delay.

Finally, make sure that you install the alarm in a professional manner. Use 10 x 0.2mm (or thicker) hookup wire for all external connections and terminate all leads in suitable connectors. In fact, it is a good idea to purchase an assortment of automotive quick connectors, bullet connectors and lugs before commencing installation.

The alarm can be mounted in any convenient location but, for most cars, the best place will be under the rear parcel shelf inside the boot. The auxiliary battery can also be mounted in the boot and should be securely clamped. Run leads to the front of the vehicle alongside existing wiring looms and don't omit the in-line supply fuses or you could get a fire in the event of a short.

The horn speaker can be mounted in the engine bay, but make sure that neither it nor the wiring to it is accessible from outside the vehicle. In fact, the effectiveness of this alarm ultimately depends on just what sort of a job you make of the installation.



# QUALITY ALTRONICS PRODUCTS

\* TOLL FREE PHONE ORDER SERVICE (008 999 007)

\* NEXT DAY JETSERVICE DELIVERY READ ON! ➔

## MICRON SUPER 80

WAS \$699 in 1983



NOW  
AN INCREDIBLE  
**\$399**

Your "Super 80" printer will enable you to print letters, reports, graphics generated pictures, etc and importantly for the programmer, Hard Copy of program listings.

Operating under software control from any general purpose micro-computer the Super 80 features 13 different print types including emphasized (LETTER QUALITY). Bidirectional print action ensures smooth, quiet operation.

**228 ASCII Characters, Handles 4" to 10" Paper**  
**STANDARD CENTRONICS INTERFACE**

D1174 VALUE PACKED AT .....	<b>\$399.00</b>
D1178 SERIAL INTERFACE .....	<b>\$145.00</b>
D1175 SPARE RIBBON .....	<b>\$12.50</b>


## Superlative MICRON SERIES II MONITORS

★ 1050 lines resolution at centre screen. ★ 22MHz bandwidth. ★ Video input impedance switch allows networking use. ★ Incredible — repeat Incredible — resolution.

Guaranteed (we mean it) to out perform any other low cost monitor in Australia.

D 1114 Micron Series II Hires .....	<b>\$199.50</b>
D 1115 Micron II Non-Glare Hires .....	<b>\$219.50</b>

## "MICROBEE KEYBOARD"

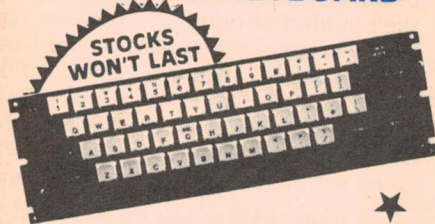


Full 60 Key Qwerty Computer Keyboard exactly the same type as has been used up to now with the famous Microbee Computer. SPST keys. Complete with mounting plate, all key caps etc. Fully assembled. Incredible value — Be Quick!

D1510 ..... **\$29.95**

Microbee is a registered trademark of Applied Technology Pty. Ltd.

## PROPORTIONAL JOYSTICK



SELF  
CENTERING

K9674  
**\$32.50**  
(ETI DEC '83)

FOR THE  
BEE!

AT LAST AN ANALOGUE JOYSTICK  
Plot X-Y co-ordinates on the screen, sign your name. A great graphics aid. Complete kit including case, software example.




## DIRECT IMPORT PRICE ON QUALITY JOYSTICKS

SELF CENTERING TYPE ★ HEAVY DUTY SUCTION CUPS — STAYS IN PLACE ★ SILVER PLATED SWITCH CONTACTS ★ PISTOL GRIP ★ VERY RESPONSIVE.


TO SUIT COMMODORE  
VIC-20, ATARI, etc.  
D1410 ..... **\$19.50**

**SPECIFICATIONS:**  
**Screen** Green phosphor. **Front Controls** — Power on/off, character brightness/intensity, display centering. **Rear Controls** — Background intensity, vertical and horizontal adjustment etc. **Input Impedance** — Switch 75/10K Ω. **DC Socket** — 12V DC output at 1.1 amp — power your micro direct from the monitor. **Bandwidth** — 10Hz-22MHz. **Resolution** — 1050 lines minimum at centre screen.

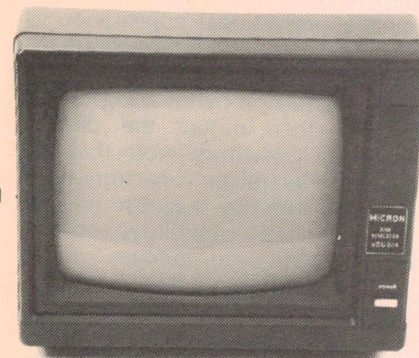

## MULTIPROM INTERFACE

44K OF PROGRAM STORAGE

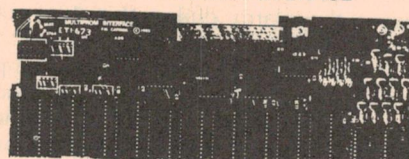

A sensational new kit for the MICROBEE, requires no modification to the computer except for the fitting of a 50 pin expansion socket. This project is easy to build and will allow you to store and software select up to 44K of eeprom storage — acts like a mini disk drive system with the speed of RAM. Extra units may be added to further increase storage.

**THE MICROBEE® KIT OF 1984**


K9673 ..... **\$99.50**

## PARALLEL INTERFACE

**BUILD YOUR OWN INTERFACE  
AND SAVE \$\$\$**

A simple kit to build — takes about 20 minutes, save on the cost of a built interface and save the cost of a serial printer.

K9671 ..... **\$29.95**



INCLUDES  
CENTRONICS PLUG  
AND CABLE

TOP QUALITY  
LINED  
PRINTER  
PAPER  
TRACTOR FEED

AT LAST AT  
AN AFFORDABLE  
PRICE

TO SUIT SUPER 80  
240mm WIDE  
D1160 : **\$39.50**  
880mm  
D1165 : **\$47.50**

2000 SHEETS  
PER BOX

FREE FREIGHT  
IF PURCHASED  
WITH PRINTER


BANKCARD HOLDERS — PHONE ALTRONICS TOLL FREE 008-999-007 FOR NEXT DAY JETSERVICE DELIVERY

BANKCARD HOLDERS — PHONE ALTRONICS TOLL FREE 008-999-007 FOR NEXT DAY JETSERVICE DELIVERY



BANKCARD HOLDERS — PHONE ALTRONICS TOLL FREE 008-999-007 FOR NEXT DAY JETSERVICE DELIVERY

BANKCARD HOLDERS — PHONE ALTRONICS TOLL FREE 008-999-007 FOR NEXT DAY JETSERVICE DELIVERY



**\* 14 DAY MONEY BACK SATISFACTION GUARANTEE**  
**\* ALL AT DIRECT IMPORT ALTRONIC PRICES**  
**DICK SMITH — EAT YOUR HEART OUT!**

## QUALITY SOFTWARE FOR YOUR MICROBEE® FROM MYTEK COMPUTING

**D 3500 ASTEROIDS PLUS:** Asteroids Plus is one of the finest resolution graphic arcade games available for the microbee computer. It features 3-D point by point resolution graphics, shields, sound effects, intelligent objects, guided missiles, black holes and a score board. If you enjoy playing computer games, you will be captivated by Asteroids Plus. **\$22.50**

**D 3505 KILOPEDE/GHOST MUNCHER:** Two fantastic arcade games on the one cassette. KILOPEDE: Is a very fast action game which incorporates good sound and excellent graphics. Try and stop the Kilopedes before they get you. GHOST MUNCHER: Another fast action, fun game. One of the arcade classics, a microbee version of Pacman. **\$19.95**

**D 3510 METEOR RESCUE:** Your mission is to rescue stranded astronauts. You are the commander of the Landing Module docked in space with the mother ship. It is your responsibility to guide the landing module through a meteor field, down to the surface of the planet, to land safely on a landing pad. An astronaut will then run to your landing module and you will blast off. You must use your lasers if necessary and dock with the mother ship again. A total of six astronauts must be shuffled to the mother ship. **\$17.50**

**D 3515 DEFENDER:** This long awaited program is finally available. Defender needs no introduction. The Defender arcade game is one of the most popular ever produced and the Mytek version is brilliant, a rival for Asteroids Plus. **\$22.50**

**D 3517 EMU JOUST:** Must be the most relaxing and enjoyable game available today. Again supports incredibly smooth, hires graphics. Defend your domain against the evil vulture Knight of Drass and have a lot of fun doing it. **\$19.95**

**D 3535 MACHINE CODE TUTORIAL:** Consists of 8 interactive exercises designed for teaching machine code programming and related topics as they apply to the microbee computer. Only a general knowledge of the BASIC language is assumed. Machine Code Tutorial is designed to bridge the gap between BASIC programming and being able to understand and use typical Z80 manuals. **\$25.00**

**D 3540 BASIC TUTORIAL:** Is a super teaching aid for any classroom. Basic Tutorial is a set of 9 interactive exercises designed for teaching Basic to the computer novice. No previous knowledge is assumed. Basic Tutorial uses a unique double screen technique to display both the normal computer output and the tutorial exercises at the one time. This allows the student to use the microbee in the normal way, while the tutorial instructions appear in the lower half of the screen. **\$19.95**

**D 3550 KING KONG:** Just like the arcade game of a similar name. The game consists of several frames which you must complete to rescue your sweetheart from Kong. Excellent graphics and sound. Joystick compatible. **\$19.95**

A fast action packed game which must rate as one of Mytek's best. You have full control of helicopter and you must fly over enemy lines to rescue your allies. Fast realistic graphics and excellent sound. **\$19.95**

**D 3554 BACKGAMMON:** This game conforms exactly to that set down in the official rules of the International Backgammon Association, including the rules of doubling and scoring. **\$19.95**

Microbee is a registered trademark of Applied Technology Pty. Ltd.

### EPROM PROGRAMMER (ETI JAN. 83)



K9668 ..... **\$55.00**

**Versatile, low cost and easy to build.** Plugs straight into the microbee I/O port. Suitable for 2716, 2732, 2532, 2732A and 2764 Eproms. Burn your games programmes and eliminate cassette loading time.

**KIT FEATURES** Sockets for all other IC's 1 x 2716 supplied — get started straight away. Front Panel and Mains (IEC approved) transformer 28 pin and 16 pin wire wrap sockets to flush mount personality plugs (2 included) and 2IF socket (included) DB 15 Plug Complete to last nut and bolt.

(See Review ETI AUGUST 1983)

### RADIOTELETYPE DECODER (ETI APRIL 83)




K9733 ..... **\$19.50**

Display RTTY encoded messages on your Video Monitor. Receive up to date weather information. International News before the Papers, all sorts of coded military info. Simple circuit uses PLL techniques. Single PCB Construction. Kit includes DB15 Plug and backshell for connection to microbee. Shielded pretinned PCB.

## FAMOUS J & M BRAND D RANGE CONNECTORS SAVE 25% ON BULK QUANTITIES!

**EXCLUSIVE TO  
ALTRONICS AND DEALERS  
IN AUSTRALIA**

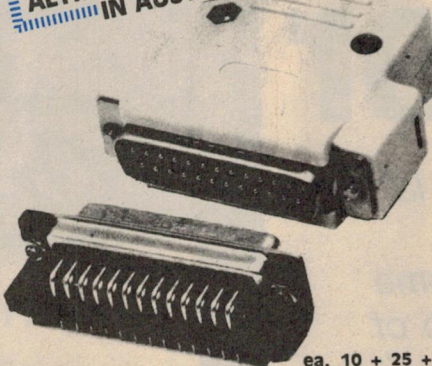


P 0880 DB	9 Male 9 Pin	ea. 10 + 25 +	2.90	2.20	1.95
P 0881 DB	9 Female 9 Pin		2.95	2.70	2.50
P 0882 DB	9 Male PCB Mnt		3.25	3.10	2.98
P 0883 DB	9 Female PCB Mount		3.95	3.75	3.60
P 0889 DB	9 Backshell Cvr		2.00	1.80	2.30
P 0890 DB15	Male 15 Pin		2.95	2.90	2.29
P 0891 DB15	Female 15 Pin		3.50	3.00	2.80
P 0892 DB15	Male PCB Mnt		3.25	3.10	2.98
P 0893 DB15	Female PCB Mount		3.95	3.75	3.60
P 0895 DB15	Backshell Cvr		2.85	2.90	2.30
P 0900 DB25	Male 25 Pin		4.50	3.95	3.60
P 0901 DB25	Female 25 Pin		4.95	4.50	3.98
P 0902 DB25	Male PCB Mnt		4.50	4.10	3.85
P 0903 DB25	Female PCB Mount		5.50	5.00	4.70
P 0905 DB25	Backshell Cvr		2.00	2.50	3.98

## MASSIVE SAVINGS

FOR OEM'S!  
PHONE OUR WHOLESALE DEPT.  
**(09) 381 7233**  
ASK FOR STEVE

## NEW MODEL DATA CASSETTE UNCONDITIONALLY GUARANTEED TO SAVE / LOAD THE RAWEST OF DATA EVERYTIME!

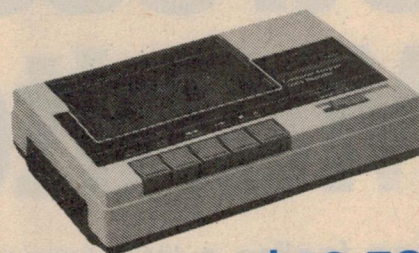

D1122 ..... only **\$49.50**

A recorder designed solely for the purposes of data storage now at an unbelievable price.

- SLIDE VOLUME CONTROL a **must** for quick checking of levels.
- TAPE COUNTER a **must** for easy location of programmes.
- INBUILT PIEZO TRANSDUCER enables you to listen audibly to tape.
- 6v DC operation - USE WITH M9000 PLUG PACK ensures low hum level.
- ROBUST CONSTRUCTION OF BOTH INTERNAL MECHANISMS AND EXTERNAL CASE.

## BONUS OFFER

**10 FREE MICRON C20  
DATA CASSETTE TAPES  
(CAT D1141) INCLUDED WITH  
EVERY DATA CASSETTE PLAYER  
PURCHASED THIS MONTH**

(NOT AVAILABLE FROM DEALERS  
— SHOP AND MAIL ORDER ONLY)

## C20 DATA CASSETTES Quality MICRON brand ORDERED SEPARATELY

D1141 ..... **\$1.50**

(10 UP) ..... ONLY **\$1.25**

### MICROBEE® LIGHT PEN (ETI AUGUST 83)




K9649 ..... **\$19.95**

**PROVIDES DIRECT PERSONAL  
CONTACT WITH YOUR BEE!**

AT LAST — a light pen for the Bee. This pen works in the low-resolution graphics mode and connects directly to the I/O port. • Complete kit including DB15 2m CORD • Fully documented with software example.

### FAX-DECODER (ETI SEPT. 83)

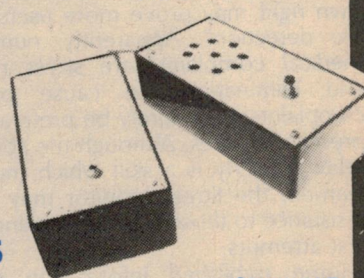

K9733 ..... **\$24.50**

This project allows you to decode the signals of shortwave stations transmitting radio facsimile weather maps satellite pictures etc and then reproduce them on your dot-matrix printer.

- Complete kit of parts includes DB15 Ribbon Cable
- SOFTWARE LISTING



# Learn to relax with this **Stress Monitor**

*Been feeling a little tense lately?  
Want to really unwind?  
Maybe you need to try some  
meditation — with the help of  
our Stress Monitor.*

by COLIN DAWSON

Actually, the Stress Monitor is a new twist on the lie detector theme. It has long been known that a person's skin resistance can be made to vary quite markedly in response to awkward questions. Theoretically, a dishonest answer will increase the person's level of stress, inducing him to sweat and thereby reduce his skin resistance.

Even when used in conjunction with other bio-measurements (the "polygraph"), lie detector tests are far from universally accepted. Although the skin resistance measurements do appear to bear some relationship to the level of stress, there is much controversy when it comes to interpreting the results. This project is designed to measure stress as a means of "bio-feedback", without any unpleasant implications regarding honesty.

Ultimately, stress measurement in its own right may prove more useful than "lie detection". Apparently, numerous medical complaints are stress related and eliminating the cause of the complaints must surely be preferable to prescribed cures. Although the ability to relax properly is a skill which must be learned, the Stress Monitor may be of assistance to those who are making their first attempts.

Some published information claims that changes in skin resistance for any given environment are a direct indication of the subject controlling his state of relaxation. We can verify that a certain

amount of conscious control over skin resistance is possible. While we can not state with certainty that this in itself is relaxation, it does in all probability put the subject in a state conducive to worthwhile relaxation.

This type of self therapy can be useful in lowering the blood pressure of hypertensive patients. Some people claim that it also contributes to a general sense of well being, although this would probably require frequent and lengthy sessions.

Unfortunately, relaxation is not something which can be achieved by a determined effort. In fact, anyone who approaches stress relief with the intention of forcing himself to relax will usually achieve the opposite effect. Some form of bio-feedback is needed to assist the subject in achieving his objective, and we hope that the Stress

Monitor can be useful here.


As there is not sufficient data available, we can not boldly proclaim that stress monitoring is an accepted branch of medicine — at least not by measuring skin resistance. The final assessment of a project such as this rests with each individual constructor.

An obvious question to pose at this stage is "Why can't I just use a multimeter set to its resistance range?" The answer is that you could — under certain conditions and with limited success. Because skin resistance can be very high (over  $10M\Omega$  with poor contacts and low ambient temperature), most analog multimeters would not have sufficient resolution at high resistances. Whilst digital meters would have the resolution, the digital display is not suitable for this project.

The circuit described here has





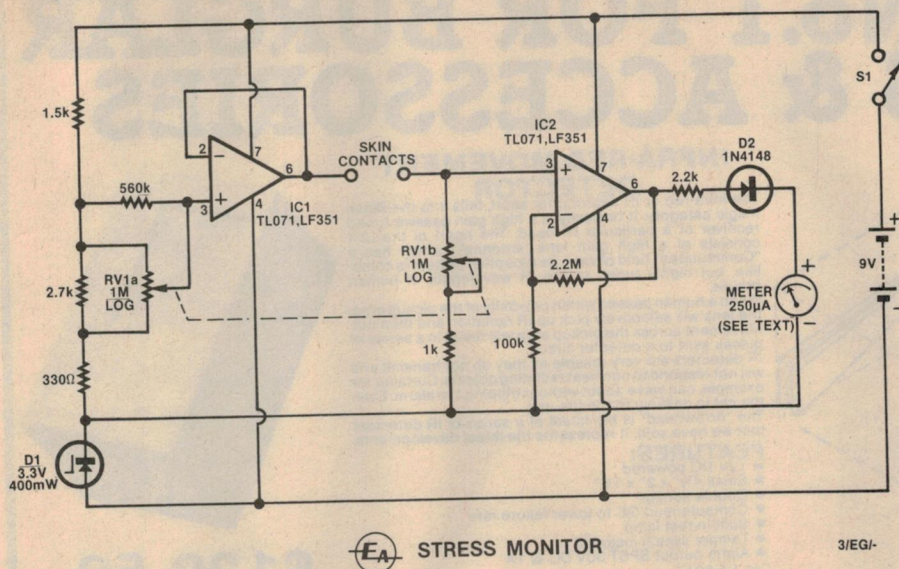

useful resolution at high resistances and also has the desired analog display. It has two FET-input op amps which enable it to measure skin resistances of over 20M $\Omega$ . The sensitivity is adjustable over a wide range to compensate for different test conditions and skin contacts. Adjusting the sensitivity simultaneously adjusts the potential applied to the contacts, although this never exceeds 2V. Because of this "double" adjustment, the response of the circuit is nearly logarithmic — this contributes to the wide range of skin resistances that can be monitored (over 4000:1).

The circuit is quite simple, its main elements being the two FET-input op amps, a dual ganged potentiometer and a  $250\mu\text{A}$  meter. Consider first the operation of IC2 which is quite conventional for this type of circuit. It is a non-inverting amplifier which senses the current through the skin contacts and drives the meter. IC2 (an LF351 or TL071) has a gain of 20 which enables it to produce a full scale deflection of the meter for skin resistances up to  $20\text{M}\Omega$ .

A 3.3V zener diode provides a reference for both op amps. This voltage is fed into the inverting input of IC2 through a 100k $\Omega$  resistor. The non-

**\$29**

This includes sales tax, but not the cost of a battery.

A second, and more complicated divider is used to control the voltage which appears at the output of IC1. RV1a forms part of this divider and swings the voltage at its wiper between 0.3 and 2.5V above the reference. In fact, this is the voltage which must be applied to the skin contacts but it must be buffered (by IC1) first.


Notice that the output of IC2 is not connected directly to the meter. Rather, it is connected through a series resistor and diode. The diode cancels the effect of any offset voltage which may appear at the output of IC2, thereby ensuring that the meter will read zero when the contacts are open circuit. Because we have used a  $250\mu\text{A}$  meter, a  $2.2\text{k}\Omega$

current limiting resistor was necessary. This permits the meter to be adjusted to full scale with a skin resistance of  $20\text{M}\Omega$ , thereby affording maximum protection to the movement. Other meters may dictate that the value of the limiting resistor be changed.

Assembly of the printed circuit board components is very straightforward and should present no problems. The



# JAYCAR No.1 FOR BURGLAR ALARMS & ACCESSORIES

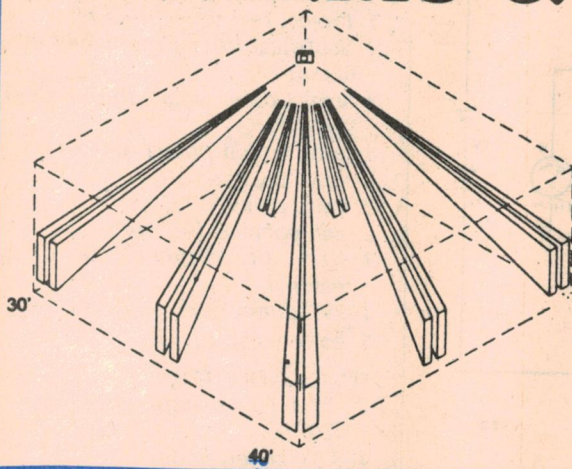

## INFRA-RED MOVEMENT DETECTOR


The infra-red or IR detector for short, falls into the Black magic category. It basically is a high gain passive tuned receiver of a particular IR band. The heart of the unit consists of a high gain lens (antenna?) which has a "Commutated" field of view. Its reception pattern is comb-like, but highly tuned to the IR wavelength of human bodies.

When a human passes within proximity of the pickup area, the lens will selectively pick up IR radiation and then not. Movement across the pickup area will result in a series of pulses sent to a detector circuit.

IR detectors are very reliable as they do not transmit and will not respond to non heat radiating objects. Curtains, for example, can wave about without tripping the alarm. Even the cat is unlikely to trip the unit.

The "Arrowhead" is the latest of a series of IR detectors that we have sold. It represents the latest developments.

- FEATURES:**
- 12V DC powered
  - Small 4½" x 2" x 1½"
  - Double sensor
  - Computerised QC to lower failure rate
  - Built in test lamp
  - Tamper switch included
  - Alarm output SPST 30V DC @ 1A
- Cat. LA-5017

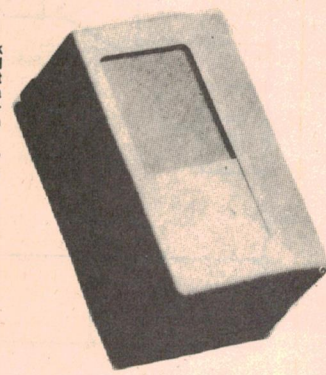

**\$129.50**

## DOOR/BOOT/BONNET SWITCH SET

European made set consisting of two spring-mounted switches with plastic actuators, two neoprene seals, two sturdy brackets, QC female connectors, boots, self-tapping screws and instructions. Switches are normally open (i.e. when boot/bonnet/door is closed). They close circuit when any of the above is opened.

Cat. LE-8776

**\$3.95**

## REED SWITCH/MAGNET ASSEMBLIES

Powerful magnets. Self-adhesive or screw mount. Two types available:  
**NORMALLY CLOSED** (when in proximity of magnet) Cat. LA-5070  
**NORMALLY OPEN** (when in proximity of magnet) Cat. LA-5071

Both \$2.95 each (1-9)  
 \$2.50 each (10 plus)



## KEYSWITCH - SPECIAL AUTOMOTIVE TYPE

This unit features rugged neoprene rubber boot that clips over the weather-exposed part of the switch. Two special tube-type keys are included. A relatively small ½" (12mm) hole needs to be drilled in the metalwork

Cat. SM-1032

**\$4.95**




## 4 SECTOR ALARM MODULE

Ledlux is an alarm module suitable for both household and commercial use.

### FEATURES:

- Adjustable entry delay time
  - Fixed double exit time on 2 delay sectors - 70 seconds
  - On 2 instant sectors 7 seconds
  - Inbuilt silent seal test on sectors shown by 2 Red LEDs
  - Inbuilt power on signal and battery voltage monitor shown by green LED
  - Inbuilt siren driver. Can drive 3 horn speakers and 1 bell
  - Adjustable sound speed from - a slow wail to fast wobble
  - Adjustable sound time (when alarm is triggered) from 1-20 mins (pre-set at 10 mins)
  - Size 110 x 85 x 20mm fully insulated
  - Operation voltage 6-16V nominally 12V
  - Operation current 600mA so can be used with dry batteries
- Cat. LA-5160

**\$75.00**



## SEE OUR DOUBLE PAGE KIT AD FOR MORE BURGLAR ALARMS

## LOW COST KEYLESS AUTO ALARM - A NEW PRODUCT FROM JAYCAR

AMAZING VALUE FOR MONEY - \* Automatic - No keys - No switches \* Siren Horn INCLUDED in price \* Output to drive car horn relay \* N.C. circuit loop \* N.O. circuit loop \* 23 seconds (approx) exit delay \* 10 seconds (approx) entry delay \* Auto reset \* Comprehensive instruction/installation manual

Cat. LA - 5315

**ONLY \$49.95**

## ALARM CONTROL MODULE

Ideal for the home, business and factory/warehouse. Control module allows soundless entry and exit. Automatic alarm re-set, 12V DC operation, both normally open for heat, smoke, vibration and normally closed for, doors, windows etc.


- Exit delay approximately 20 seconds
- 10 second closed circuit delayed alarm
- Instant alarm for open circuit
- Auto re-set

## ALARM STICKER

Durable self-adhesive sticker that clearly tells would-be thieves there is an alarm fitted. Sticker does not refer to a specific alarm which creates further doubt.

Cat. LA-5100

95¢ each 1-9 85¢ each 10

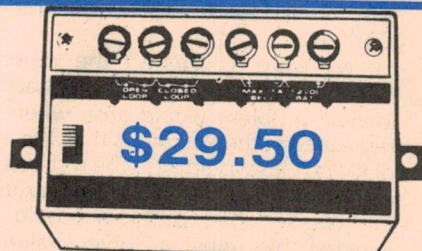

**\$29.50**

- Power 12V DC
  - Current drain 2mA system armed
- Cat. LA-5030

## Jaycar Incorporating ELECTRONIC AGENCIES

**SYDNEY** SHOWROOMS  
 117 YORK STREET - PHONE: (02) 264 6688 and (02) 264 6689  
**CARLINGFORD** TELEX: 72293  
 Cnr. CARLINGFORD & PENNANT HILLS ROAD - PHONE: (02) 872 4444  
**CONCORD**  
 115 - 117 PARRAMATTA ROAD - PHONE: (02) 745 3077  
**HURSTVILLE** 121 FOREST ROAD - PHONE: (02) 570 7000

## NUMBER 1 FOR KITS

POST AND PACKING CHARGES  
 \$5 - \$9.99 (\$1.50) \$10 - \$24.99 (\$3.20)  
 \$25 - \$49.99 (\$4.50) \$50 - \$99.99 (\$6.50)  
 \$100 - \$199 (\$8.00) Over \$199 (\$10)

\*Free INSURANCE for Road & Registered Post over \$200\*  
 All heavy or bulky items (over 20kg.) sent Comet Road Freight \$12.00 anywhere in Australia.


SHOP HOURS CARLINGFORD, CONCORD & HURSTVILLE  
 Mon - Fri 9am - 5.30pm: Sat - 9am - 12pm: Thurs night 8.30pm (Not Concord)  
 SHOP HOURS SYDNEY  
 Mon - Fri 8.30am - 5.30pm: Sat - 8.30am - 12pm: Thurs night 8.30pm

MAIL ORDERS AND CORRESPONDENCE: P.O. Box 185, Concord, 2137



**STOP PRESS!! NOW OPEN ALL DAY SATURDAY (CONCORD STORE ONLY)**



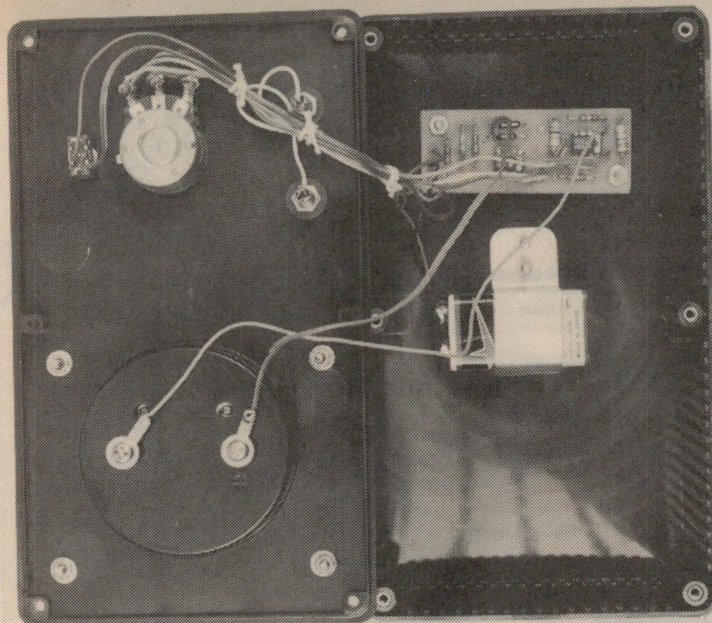

# Stress Monitor

polarised components are the two ICs and the two diodes — the rest are only resistors and can be mounted either way 'round.

A battery holder of some sort should be provided. We made one from a piece of scrap aluminium measuring about 65 x 20mm.

By far the most difficult aspect of construction is mounting the meter. This is particularly so for meters which are not symmetrical (the coil housing is offset with respect to the mounting screws). Regrettably, there are a number which fall into this category. Our only advice is take care and double check your marking-out.

Our skin contacts consisted of two rivets pressed through two strips of Velcro. The Velcro strips are arranged so that they form a bracelet which can be fastened around the wrist or a finger. The strips overlap for about 15mm and this is where the rivets are pushed through. The heads of the rivets will be pressed against the skin when the bracelet is fastened.




We have used a large (100mm) meter and a plastic project box measuring 190 x 110 x 60mm for the project. Both of these items are quite arbitrary and could be replaced with a less expensive alternative. In fact, the meter could be omitted entirely and replaced with a multimeter set to a low current range (about 250 $\mu$ A). It may even be possible to build the whole project into an old multimeter, substituting the dual ganged potentiometer for the rotary control.

Aluminium rivets are best avoided for

this project — they will prove rather difficult to solder to the connecting leads. Also, the inevitable thin oxide coating will reduce their effectiveness as "contacts". Plated rivets — either brass or steel — would be more suitable.

Follow the wiring diagram closely. The battery, both potentiometer gangs and the meter must be connected correctly. To test the Stress Monitor, first switch it on without touching the skin contacts. The meter should read "0", irrespective of the "Sensitivity" control adjustment. For the next test, a fixed resistance must be connected between the skin contacts — this could be your skin but a resistor of say 1M $\Omega$  might be more convenient. Rotation of the sensitivity control should take the meter through its full range of deflections. If this can not be repeated when the skin contact bracelet is used, the rivets are probably not making good contact.

To be successful, relaxation must be practised in a quiet room free from distractions — take the phone off the hook and certainly turn the TV set off. The object is to clear the mind completely of stress inducing thoughts. Slow and deep breathing (sometimes called "abdominal breathing" because it originates from the abdomen) is essential. Some people find that it helps to concentrate all of their attention on each part of the body in turn. This starts with the toes, which must be considered individually — at least, that's what the literature says. Next, attention is moved to the feet and then in turn to the lower legs, upper legs, abdomen, chest, neck and finally the face and head. This

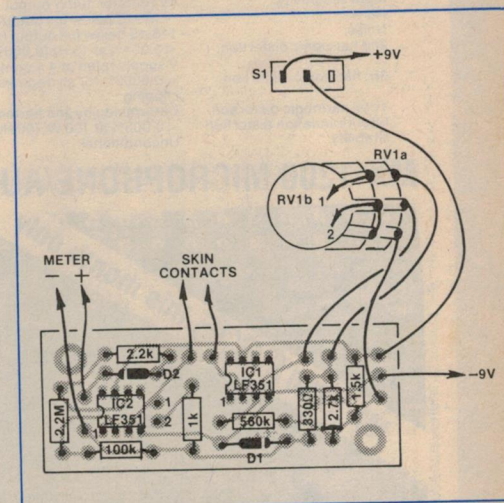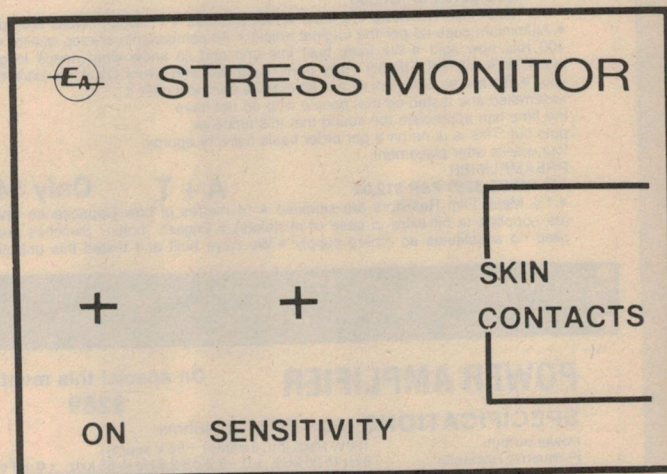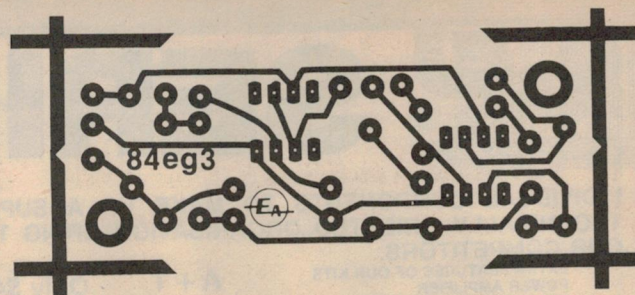

process can sometimes produce a tingling sensation when it is particularly effective.

A significant reduction in the level of stress is not something which can be achieved instantly. Particularly for the first few attempts, a subject must be prepared to spend at least 10 minutes per session.

When this relaxation process has been completed, the subject should be largely unaware of his environment, his attention focussed entirely on himself. When he feels that the session has been satisfactory, it is important that the subject does not suddenly end it by standing up or beginning a conversation. Instead, he must slowly become aware of his environment and restore his breathing to its normal pattern.





# SERIES 5000

**SPECIAL PRICES THIS MONTH**

As designed by ETI  
INDIVIDUAL COMPONENTS TO MAKE UP A SUPERB HI-FI SYSTEM. DIRECT IMPORT AND A MORE TECHNICALLY ORIENTED ORGANISATION BRING THESE PRODUCTS TO YOU AT LOWER PRICES THAN OUR COMPETITORS.

## EXTRA FEATURES OF OUR KITS POWER AMPLIFIER KIT PRICE \$319 P&P \$12.00

• 1% Metal Film Resistors are used where possible • Prewound Coils are supplied • Aluminium case as per the original article • All components are top quality • Over 400 Kits now sold • We have built this unit and so know what needs to go into every kit • SUPER FINISH Front panel supplied with every kit at no extra cost to you. • We are so confident of this kit that we can now offer it assembled and tested so that people who do not have the time can appreciate the sound that this amplifier puts out. This is done on a per order basis delivery approx. four weeks after placement.

## PREAMPLIFIER KIT PRICE \$289 P&P \$12.00

• 1% Metal Film Resistors are supplied • 14 metres of Low Capacitance Shielded are supplied (a bit extra in case of mistakes) • English "Lorlin" Switches are supplied no substitutes as others supply • We have built and tested this unit and so

**A + T Only \$449**

know what needs to go into every kit • Specially imported black anodised aluminium knobs • Again as with the power amp we are offering this kit A & T at a price which we do not believe there is a commercial unit available that sounds as good. Same delivery as the power amp.

## PREAMPLIFIER Kit Price \$289, P&P \$12.00 SPECIFICATIONS

Frequency response: High-level input: 15Hz-130 kHz, +0, -1 dB Low-level input — conforms to RIAA equalisation,  $\pm 0.2$  dB  
1kHz < 0.003% on all inputs (limit of resolution on measuring equipment due to noise limitation).  
Distortion: High-level input, master full, with respect to 300 mV input signal at full output (1.2V): > 92 dB flat > 100 dB A-weighted.  
S/N noise: MM input, master full, with respect to full output (1.2V) at 5 mV input, 50 ohm source resistance connected: > 86 dB flat > 92 dB A-weighted.  
MC input, master full, with respect to full output (1.2V) and 200  $\mu$ V input signal: > 71 dB flat > 75 dB A-weighted.

**On Special at \$259  
Normally \$289**

*\*All parts available separately for both kits.*

Please note that the "Superb Quality" Heatsink for the power amp was designed and developed by Rod Irving Electronics and is being supplied to other kit suppliers. This product cost \$1,200 to develop so that your amplifier kit would have a professional finish as well as sound.


## POWER AMPLIFIER

**On special this month  
\$289**

### SPECIFICATIONS

150W RMS into 40hms  
Power output: 100W RMS into 8 ohms ( $\pm 55$  V supply).  
Frequency response: 8 Hz to 20 kHz, +0 -0.4 dB 2.8 Hz to 65 kHz, +0 -3 dB. NOTE: These figures are determined solely by passive filters.  
Input sensitivity: 1V RMS for 100W output.  
Hum: -100dB below full output (flat).  
Noise: -116 dB below full output (flat, 20 kHz bandwidth).  
2nd harmonic distortion: < 0.001% at 1 kHz (0.0007% on prototypes) at 100 W output using a  $\pm 56$  V supply rated at 4 A continuous. < 0.003% at 10 kHz and 100 W.  
3rd harmonic distortion: < 0.0003% for all frequencies less than 10 kHz and all powers below clipping.  
Total harmonic distortion: Determined by 2nd harmonic distortion (see above).  
Intermodulation distortion: < 0.003% at 100 W. (50 Hz and 7 kHz mixed 4:1).  
Stability: Unconditional

## MX-1200 MICROPHONE/AUDIO MIXER

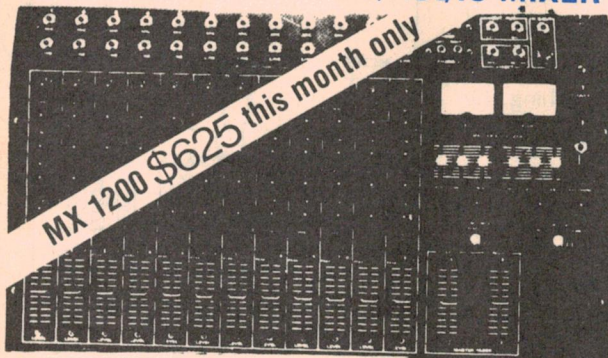

**MX 1200 \$625 this month only**

This unit features: 12 microphone line inputs with pan, bass, treble, effect and fold back controls for each channel • LED peak indicators for each channel • 2 turntable inputs with cross-fade and individual output controls • master equaliser for bass, midrange and treble • variable headphone output etc. etc. • complete with carrying case.


### SPECIFICATIONS:

INPUTS  
Level/Impedance Mic: 46 db-1K  
Line: 22 db-16K x 12  
Phono: 52 db/50K STEREO x 2 (2mv) at 1kHz  
Effect Return (Aux): 20 db-50K x 1  
OUTPUTS  
Level/Impedance L & R 0 db-2K  
Effect Send 0 db-2K F/B Out 0 db-2K  
Headphone Stereo +10 db-600 (100 1K)  
EQUALISATION  
Channel  
Bass  $\pm 15$ db  
Treble  $\pm 15$ db  
Master  
Bass  $\pm 12$ db  
Treble  $\pm 10$ db  
Middle  $\pm 12$ db

FADER & CONTROLLERS  
12 channel fader: Slide 60mm, LOG 25%  
2 Master fader: Slide 60mm, LOG 15%  
12 F/B Volume: 300 LIN  
1 F/B Master level: 300 LIN  
12 Effect Send: 300 LIN  
1 Effect Return: 300 LOG 15%  
2 Phono: 300 LOG 15%  
1 Head Phone: 300 LOG 15%  
S/N: 56dB  
FREQUENCY RESPONSE: 20-20 KHz  
TOTAL HARMONIC DISTORTION: Less than 0.1%  
METER 2 illuminated VU Meters 0db = 0.775V  
PEAK INDICATOR: 12 LED Peak Indicators  
VOLTAGE: 240 VAC 50Hz  
POWER CONSUMPTION: 7.2 watts  
DIMENSIONS: 620 (W) x 386 (D) x 108 (H) mm  
(supplied complete with carrying case)

**NORMALLY  
\$799**

## THIRD OCTAVE GRAPHIC EQUALIZER

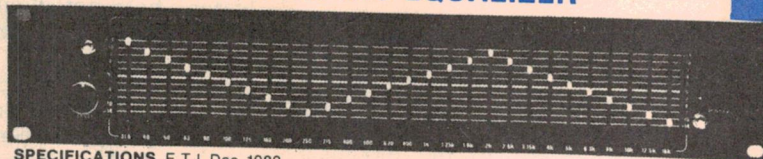


### SPECIFICATIONS E.T.I. Dec. 1982

Bands: 28 Bands from 31.5 Hz to 16 kHz  
Noise: < 0.008 mV, sliders at 0, gain at 0 (-102 dB),  
20 kHz bandwidth  
Distortion: 0.007% at 300 mV signal, sliders at 0, gain at 0;  
max. 0.01%, sliders at minimum.  
Frequency Response: 12 Hz-105 kHz, +0, -1 dB, all controls flat.  
Boost & Cut: 14 dB

## SERIES 4000 SPEAKERS.

- 8 speakers with crossovers ..... \$499
- Speaker boxes (assembled with grill and speaker cutout) ... \$299
- Crossover kits ..... \$199
- Complete kit of parts (speakers, crossovers, screws, inner-band, boxes) ..... \$799
- Assembled, tested, ready to be hooked up to your system ... \$849



**1 unit  
\$189**

**2 units  
\$359**

WE BELIEVE THAT WE ARE NOW THE ONLY ONES TO SUPPLY COMPLETE SPEAKER KITS ASSEMBLED AND TESTED FOR THOSE WHO HAVEN'T GOT TIME \$849 EX STOCK.  
PLEASE WRITE FOR CONSTRUCTION NOTES, THESE COMPLIMENT THE SERIES 5000 AMP RANGE AND ADD THE FINAL TOUCH.

## ROD IRVING ELECTRONICS


425 High St., Northcote, Vic. 48-50 A'Beckett St., Melb., Vic.  
Phone (03) 489 8866, (03) 489 8131, Mail Order Hotline (03) 481 1436  
Mail orders to P.O. Box 235 Northcote 3070 Vic.  
Minimum P & P \$3.00. Errors & omissions excepted.

Please address tax exempt, school, wholesale, and dealer enquiries to:  
**RITRONICS WHOLESALE**  
1st floor 425 High St. Northcote 3070 (03) 489 7099 (03) 481 1923  
Telex AA 38897



**Built  
and tested**

## VIDEO SWITCHING BOX

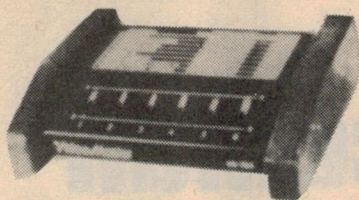

**ON SPECIAL  
\$39.50**

Low loss R.F. switching—allows inputs for:- VCR, video disc, antenna, cable TV, home computer and video games.


## WE HAVE A GREAT RANGE OF VIDEO CONNECTORS AND CABLES FOR VIDEO TO VIDEO DUBBING.

### Cables


- PA-25**  
5 pin 180 degree dubbing adaptor—Reverse pins for video use **\$6.95**
- VC-14**  
8 pin square plug to 8 pin square plug. Cable length 2 metres **\$29.95**
- VC-15**  
6 pin DIN plug to 6 pin DIN plug. Cable length .5m **\$4.95**
- VC-1**  
BNC plug to BNC plug. Impedance-75Ohm. Cable length 1.5m **\$6.50**
- VC-2**  
BNC plug to PL259 plug. Impedance-75Ohm. Cable length 1.5m **\$6.75**
- VC-3**  
PL 259 plug to PL 259 plug. Impedance-75Ohm. Cable length 1.5 **\$4.95**
- VC-4**  
PL 259 plug to RCA plug. Impedance-75Ohm. Cable length 1.5m **\$4.95**
- VC-5**  
RCA plug to RCA plug. Impedance-75Ohm. Cable length 1.5m **\$5.95**
- VC-6**  
BNC plug to RCA plug. Impedance-75Ohm. Cable length 1.5m **\$5.95**

### Video Connectors

- VP-8**  
8 pin square video connector plug **\$7.50**
- VS-8**  
8 pin square video connector inline socket **\$7.50**




- VP-10**  
10 pin male video plug. Used in J.V.C., Panasonic, Sharp and other VHS machines **\$11.50**
- VS-10**  
10 pin female inline socket. Used in J.V.C., Panasonic, Sharp and other VHS machines **\$11.50**
- VP-14**  
14 pin male video plug. Used in Sony, Sanyo, Toshiba and other Beta machines **\$16.50**
- VS-14**  
14 pin female inline socket. Used in Sony, Sanyo, Toshiba and other Beta machines. **\$16.50**



**Built  
and tested**

## VIDEO ENHANCER

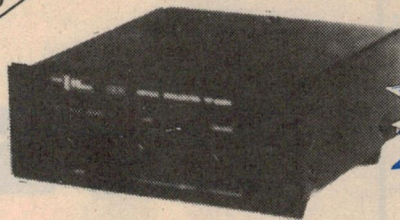

**Bargain Price  
\$75.00**

Detail Enhancer VP5030 is another important contribution to the world of video accessories. The lightweight Detail Enhancer has been particularly designed to rectify loss in detail derived from VCR tapes and picture impairments. With simple adjustments for more or moderate detailing, the detail enhancer can also overcome such picture impairments as loss of detail and disappearance of verticle lines.

### Specifications:

1. Power requirement: 12V DC 110mA
2. Input: 1 Video (RCA connector)
3. Outputs: 3 Videos (RCA connectors)
4. Output level: Video outputs: 1.0Vp-p, 75 Ohm unbalanced below 1Vp-p out.
5. Enhance: Enhance 9dB (Reference/1.0Vp-p)
6. Signal-to-noise ratio: Greater than 50dB below 1Vp-p out.

## VIDEO STABILIZER

### VP-5010

Image stabilizer — ensures no vertical roll or blackout occurs. With slight adjustment immediately stabilises picture of pre-recorded tapes — removing the copyguard signal, which tends to upset video recorders

- Power Requirement** 9VDC negative earth\*  
**Input** 2 video (RCA connectors)  
**Output** 1 video (RCA connector)  
**Oscillator Freq.** 3590Hz  
**Output Level** Video out 1.0V P.P. 75 ohm unbalanced  
**Gain** 1 (0dB)  
\*PP300 recommended power source



**\$79.50**

## DM726L LOW IMPEDANCE — OMNI DIRECTIONAL . . . \$11.95

## DM726H HIGH IMPEDANCE — OMNI DIRECTIONAL . . . \$12.50

- Impedance:** L = 500 ohm  
H = 20K ohms
- Freq. response:** 40-14KHz
- Cord/Plug:** 1.5 metres/6.5mm plug
- Dimensions:** 500 x 272mm
- With on/off switch**



## WIRELESS MICROPHONE

- Tunable** 88-108MHz **\$11.95**
- Freq. Response** 100-10KHz
- Battery** 1.5V UM3/AA
- Type** Electret condenser
- THIS MONTH ONLY**




Errors and omissions excepted.

## VIDEO HEAD CLEANERS

- HC-1 V.H.S. Video head cleaner**  
**HC-2 Beta Video head cleaner**

A professional head cleaner—employs new "double sided" cleaning action—no need to "operate" on your machine. Just insert the cassette, play for 30 seconds and the job's done. Effective for 100 operations.

**HC-1 \$17.50 HC-2 \$17.50**



## ELECTRONIC CASSETTE DEMAGNETISER

Cassette heads should be demagnetised every 30 hours for optimum performance. Technically the best available and easy to use, completely automatic — with LED indicator

- Battery:** LR-44, SR-44  
**Battery life:** 600 applications  
**Flux density:** 220 gauss/650Hz  
**Circuit:** 4 transistor — 4 diode

**\$16.95**




Twin probe for more effective magnetic field 240V AC operation — on/off switch — indicator light insulated tip

**\$14.95**



Video library storage case — looks just like hard cover book — with identification card pouch

- 1-9 10+  
A1503S BETA \$2.75 \$2.25  
A1503B VHS \$2.95 \$2.35



## DM-18 STOP/START CASSETTE MICROPHONE

- Impedance:** 200 ohm
- Freq. Response:** 250-10KHz
- Sensitivity:** -74dB
- 2.5 and 3.5mm plugs**

**\$5.95**



### TDK AUDIO TAPES

	1-9	10+
D 46	2.64	1.93
D 60	2.86	2.09
D 90	3.08	2.31
D 120	5.23	3.85
AD 60	3.47	2.86
AD 90	4.29	3.30
AD 120	6.49	5.39
ADX 60	4.46	3.30
ADX 90	5.28	4.18
SA 60	4.68	3.74
SA 90	5.28	4.29
SAX 60	5.78	5.06
SAX 90	6.38	5.72
MAC 60	10.45	9.35
MAC 90	11.28	8.75
MAR 60	13.42	10.95
MAR 90	17.29	15.35


### TDK VIDEO TAPES

60	12.50	11.00
120	14.00	13.00
180	15.00	14.50
240	25.00	23.50

### GN15

Goose neck 5/8" male to 5/8" female 15cm long


**\$4.95**




### GN33

Gooseneck 5/8" male to 5/8" female 33cm long

**\$6.95**







# The Serviceman

## TV/VCR compatibility problems

One aspect of TV servicing which I have not dealt with so far in these notes is that of video recorders. While servicing of the actual machines is something we will have to face up to in the future, the current scene, in the main, is one of making a new recorder work with an existing TV set; something which can be quite tricky at times.

My own experience in this field has been quite limited, being confined mainly to sorting out incompatible antenna plugs and sockets and helping customers to follow the not always very well written Japanese/English instruction manuals. In one case, at least, the instructions turned out to be quite definitely wrong.

But, while my experience has been limited, my colleague on the NSW south coast has been much more fortunate — if that is the right word. Perhaps because people in outlying districts normally have a choice of only two programs, compared with four or five in the capital cities, or perhaps because there are fewer alternatives, such as the cinema and live entertainment, it seems that people in his area are more attracted to the recorder than those in my suburban environment.

So what follows is from my colleague's notebook, told more or less in his own words.

The main problem involving any video recorder installation concerns the TV set's ability to handle the signals coming

from the recorder, and particularly the sync pulses. More precisely, there is a tendency for some sets to suffer from picture bend or pulling, sometimes only at the top of the picture, at other times more randomly.

The basis of this problem is the simple fact that few recorders present the TV set with a set of sync pulses which are as precise as those received from a TV station. Minute variations in tape or drum speed, in spite of the best efforts of the servo mechanisms, mean that the sync pulses suffer from short term variations not encountered with off-air signals and not envisaged when many early TV sets were designed.

Because of the precise nature of the off-air signals, set designers in the pre-recorder era tended to give the horizontal flywheel circuits fairly long time constants, on the basis that it wouldn't do any harm and might be marginally beneficial under weak signal conditions where sync pulses might be momentarily lost in noise.

With the advent of the recorder it became necessary to re-think this



philosophy. The less precise signals from the recorder make it essential that the TV set be able to adjust itself much more rapidly to these variations; in short a better compromise flywheel time constant was needed, one which is short enough to follow the likely recorder variations, yet still long enough to minimise noise interference.

In practice, it turned out that many early sets — but by no means all — did suffer from this problem, but that in most cases it was relatively easy to modify the time constant and thus solve the problem. Later TV set designs took this problem into account and provided for the shorter time constants. For the most part these sets do not present any problems but, again, there are exceptions.

### What to do

Realising the problem, most manufacturers have indicated whether or not their sets are likely to need modification and, if so, what form it should take. These recommendations are usually quite accurate but it would be wrong to expect them to be infallible. Some recorder/TV set combinations can be particularly cranky, and the serviceman will have to make his own variations on the maker's recommendations.

To date I have compiled a fairly comprehensive list of makers'

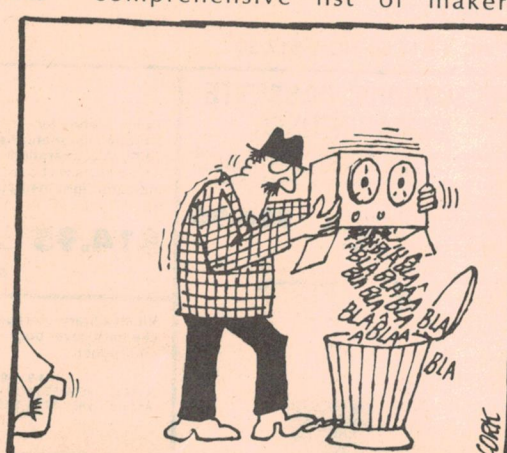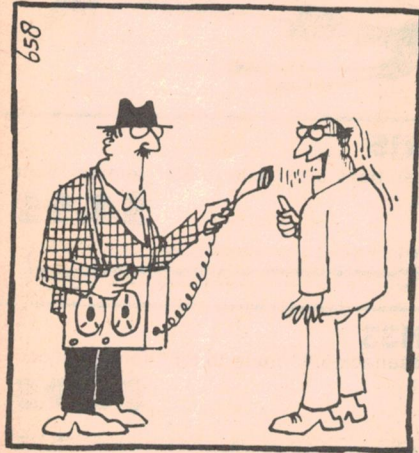



recommendations, involving both those sets which do not normally need modification and those sets which do, and what form they should take. Here it is, and I suggest that you transfer it to the appropriate service manuals if you do not already have the information. Sooner or later it's bound to come in handy.

First, the good news. Those sets which are unlikely to need modification include the AWA-Mitsubishi models, the Decca 33 series, General, Hitachi and Pye in the 34 to 48cm range (some 53 and 63cm models need modification, details to come). Also included in this category are all Rank, Sony, Sanyo (except the 5603) and Toshiba models.

### Now the bad news

The following sets are likely to need the modifications as shown. I have listed these in brief detail form only and it will be necessary for the reader to refer to the appropriate circuit diagram to identify the component and other changes.

**HMV:** the Australian made HMV and Healing models C211 and 212. On IC TBA920S, on the line board, pin 10 should be connected to ground. On model C221, a later version, both pins 9 and 10 should be connected to ground. Also, in some cases, connect a 1k $\Omega$  resistor and a 2.2 $\mu$ F capacitor, in series, from pin 11 to ground and, from pin 3, connect an 82pF capacitor to ground.

Comment: I have found some sets with some or all of these mods already fitted in production but, in general, they do not appear to be particularly effective. In short, these can be tricky.

**Kriesler:** Models 59-1 to 59-6 need modification. For models 59-1, 2 and 3, the line control module C8701 should have pins 3 and 10 connected together and pin 11 connected to ground (this modification works virtually 100%). For model 59-4, connect pin 8 of module CU451 to ground. For model 59-5, connect pin 8 of CU451 to pin 1 of this module. Modifications for the model 59-6 are the same as those listed for the Philips K12 and the Pye T37.

**National:** All the CP2000 series, and all the TC series, except TC2005, 2550, 2232, and 2252 need modification. For the M4 series chassis change C508 from 10 $\mu$ F to 3.3 $\mu$ F. On the S1 series chassis change C508 from 10 $\mu$ F to 3.3 $\mu$ F and fit a 390pF capacitor across R502. Re-adjust horizontal hold if necessary. On the M7 and M8 series chassis move jumper lead to the opposite end of R506. This lead comes from pin 5 of IC501.

**Philips:** Models K9, K9A, and K11 all use the line control module U330 and require the same modification. Bridge pins 11 and 8, and pins 10 and 3 of this module (this modification works well). The KT2A series chassis use line control

module U177. Join pins 11 and 14, and pins 10 and 3.

The KT3 series use line control module U475. Some of these sets will have been modified in production. If not, link pin 19 of U475 to the junction of R381 (27 $\Omega$ ), C386 (47 $\mu$ F), and R393 (3.3k $\Omega$ ).

**Philips K12, Kriesler 59-6, and Pye T37:** These use line control unit U455 and require that a 12k $\Omega$  resistor be added from pin 1 to pin 17, with a 10k $\Omega$  resistor from pin 17 to pin 11, and 5.5V applied to pin 17.

**Pye:** Models T29, T30, T30C. In practice I have found that these seldom need modifying but, if necessary, do the following. Change C605 from 6.8 $\mu$ F to 1 $\mu$ F tantalum, change C608 from .015 $\mu$ F to .001 $\mu$ F, and change R612 from 22k $\Omega$  to 12k $\Omega$ , 1W. The makers recommend that, in stubborn cases, C819 be changed to 820pF, and R893 from 3.3M $\Omega$  to 1.5M $\Omega$  1W. (The first three components are on the line board, the last two on the small signal chroma board.)

**Pye T34 series:** Change C608 from 6.8 $\mu$ F to 1 $\mu$ F tantalum, change C607 from .015 $\mu$ F to .001 $\mu$ F, and change R618 from 18k $\Omega$  to 12k $\Omega$  1W. Disconnect R502 from the cathode of D51 and connect to the 12V rail. (The 12V rail is connected to the anode of D51 via R502.) If necessary, change C891 from 470pF to 820pF and R893 from 3.3M $\Omega$  to 1.5M $\Omega$ . (The first four components are on the line board and the last two on the chroma board.)

**Pye T36 series:** Most of these use the U177 module as in the Philips KT2A. If so, link pins 11 and 8, and link pins 10 and 3. Pye T37: the same as Philips K12. Pye T38: the same as Philips KT3A.

**Sanyo:** CTP5603 and similar 75 series chassis. Change C403 from 10nF to 470nF. Change resistors across AFC diodes: R463 from 15k $\Omega$  to 68k $\Omega$ , R464 from 22k $\Omega$  to 100k $\Omega$ .

Well, that covers what might be termed the routine procedures for most of the popular sets and, in most cases, may be all that is necessary. But other problems can arise, particularly in the case of recorders which deliver their signal on UHF only. A few short stories will illustrate what I mean.

### Wrong biscuit

The first story concerns an AWA Mitsubishi receiver, one of the K series. This is fitted with a UHF tuner and, on the strength of this the owner had purchased a recorder with a UHF output. However, when the dealer delivered the recorder to the customer's home, and tried to make it work, it wouldn't. This was where I was called in.

The problem was simple enough really. This set uses a standard 13 channel turret tuner but is, or should be, supplied with an extra tuner biscuit

**Make it with  
Kitronics, the  
low cost  
quality  
alternative**

**LOOK**

**ALL PRICES INCLUDE  
TAX, POST & PACKING**

#### LCR BRIDGE

10<sup>10</sup> Measuring Range

Digital precision pot. readout

EA April 84 kit ..... \$151.00  
PCB (84 B4) ..... \$3.50

#### VCR SOUND PROCESSOR

Pseudo Stereo from your mono VCR  
5 band graphic equaliser  
notch filters for hiss reduction

EA April 84 kit ..... \$59.00  
PCB (84 SP3) ..... \$3.75

#### WOBBULATOR & SOUND LEVEL SENSOR

Check hifi system response  
Enables graphic equaliser set up

EA March 84 kit ..... \$66.00  
PCB's (84 AN 3A + 84 AN 3B) .. \$6.90

#### TOUCH LAMP DIMMER/TIMER

Your choice - white or brown grid  
Satin silver, brass, gold touch plate

Dimmer EA April 83 kit ..... \$21.50  
Timer EA August 83 kit ..... \$22.50  
Remote Extension EA April 83  
kit ..... \$10.00  
I.R. Remote Control EA Jan 84  
kit ..... \$24.50  
PCB's for touch lamp circuits -  
each ..... \$3.00

#### TRANSISTOR ASSISTED IGNITION Predrilled heatsink & lid

EA Feb or Dec 83 kit ..... \$36.00  
PCB (79 T1 11 - Feb 83 only) . \$3.10  
PCB Universal - accepts Feb &  
Dec 83 parts ..... \$4.00

**KITRONICS**

Mail Order: P.O. Box 126,  
Epping, Vic. 3076.  
Bankcard phone orders:  
BH: (03) 439 3591 or  
AH: (03) 435 0865





# The Serviceman

designed to take the output from the UHF tuner, which is in the VHF band. This can be fitted in the position of any unused channel in the turret, but the makers recommend channel 5 and, in fact, mark this position on the selector as "5U", implying that it can be used for either function.

In this case the set had been supplied with a channel 5 biscuit fitted to the turret, but no spare UHF biscuit. The dealer, on the other hand, imagined that the set would normally be fitted with the UHF biscuit in this position, with the channel 5 biscuit as a spare.

The situation was explained to the customer and I suggested that I could fit a UHF biscuit, knowing that I had some spares in stock. The only complication is that the set is so compact that getting at the tuner is a major undertaking, and not one I was keen to tackle in his lounge room. I quoted him a price, he agreed to have the job done, and I loaded the set and the recorder into the wagon.

Back at the shop the job was duly completed, and I connected everything up and tried to get a signal out of the recorder. It worked, but only just, and the picture was very noisy. It ultimately transpired that the UHF tuner was on the blink — specifically, the RF transistor had packed up.

It was a most unfortunate situation, but one which could not have been foreseen. I had to advise the customer that he now faced the additional expense of pulling the tuner out and having it serviced or replaced before he could use the recorder. After much discussion he decided to cut his losses and buy a new set. He paid me for fitting the alternative biscuit, but I did not charge him for a fair amount of time I had spent determining what was wrong with the tuner. So it was a lossy situation all round.

Other problems have arisen with an early HMV model which used a General chassis and was called a "Deacon". These used a similar setup to the previous one, except that they used channel 11 as the alternative UHF input and supplied the set fitted with a UHF biscuit, with the channel 11 one as a spare. Unfortunately, in this area, channel 11 is used as a translator, meaning that the set has to be modified and the UHF biscuit fitted in some other blank position.

Another problem involving this same model set is that, because the UHF tuner is usually never touched, the tuning capacitor "freezes" and it is impossible to turn it. Getting the tuner out and getting the rotor shaft moving again is both time consuming and tricky, particularly as it

would be all too easy to wreck the capacitor if one was too heavy handed. So, once again, the customer is up for additional expense before he can get his recorder working.

Finally, there is another very nasty trap, which tricked me for a while when I first encountered it. The recorder was National model which the customer had used in the Sydney metropolitan area for a couple of years before moving down the coast to my area. My first encounter with it was when he called me in to find out why he couldn't adjust the recorder tuner to channels 4 and 5A.

The tuner used the usual varicap system and I could see no reason why there should be any problem. Nevertheless, I was unable to get it anywhere near channel 4, and could only reach the edge of 5A. Fortunately, before I could organise to get the thing back to the workshop and open up the tuner, the owner happened to mention that he had bought it in Singapore.

The penny dropped. A lot of the sets sold in these Asian markets suffer from this problem. While the salesman will go to great lengths to assure the customer that these recorders are suitable for the Australian PAL system, with 5.5MHz sound/vision separation, they either don't know, or carefully avoid mentioning, that the tuners are designed for the European market.

As such, they are incapable of being tuned to channels 0, 1, 3, 4, 5 and 5A. Which means that, if you live in one of the capital city areas, you may never be aware of this limitation — unless you are a channel 0 buff — until you retire and move to the country.

## No easy solution

What's more, there is no very easy solution to the problem. The local National organisation is not in a position to supply an alternative Australian tuner which I felt could be fitted readily enough, since the two appeared to be physically compatible. (Just why they cannot be made available is not clear, but no doubt they have their reasons).

In this case it so happened that I was able to acquire such a tuner through channels which will have to remain nameless, even though the transaction was perfectly legitimate. This was duly fitted without any serious hassles, and worked first time. However, the whole deal had set the customer back around \$150, which took some of the glitter off the bargain price he had paid in Singapore.

So, "let the buyer beware."

In fact, this fellow was lucky. When I first approached the gentleman who

ultimately supplied the tuner, and explained why I wanted it, he agreed that he could supply a tuner, but expressed the opinion that it wouldn't work. When pressed for a reason for this opinion he related a story about another similar situation where he had supplied a tuner to solve what was, apparently, a similar problem.

Unfortunately, in this case, it didn't solve the problem, the recorder being unable to receive any sound. In the end, a new IF strip had to be fitted by which time the cost had risen to an alarming degree. As I explained to him, I had little doubt that this was a case where the customer had inadvertently purchased a recorder intended for the British market. Not only would the tuner be totally useless, being UHF, but the sound separation would be 6MHz instead of 5.5MHz.

Not much of a bargain really.

## EA Effects Unit

To finish off, here is a letter from J.A. of Inverell, NSW. He explains that electronic servicing is not his usual field, but that he has been "dabbling" in it for about 25 years, mainly in audio and electronic controls. He is currently involved in computers, interface equipment and data gathering. His letter was prompted by an unofficial service job involving an EA project. He writes:

A young musician in my district had assembled a kit of the EA Effects Unit (June 1983), bought from one of the major kit suppliers. His story was that, on powering up for the first time, there was a puff of "steam" from one of the tantalum capacitors. After replacing this with a new one (with the correct polarity this time) the unit still did not work and his main concern was that the BBD (Bucket Brigade Device) was damaged. He was reluctant to buy a new one unless it was needed as they cost around \$16.

I felt that the incorrectly wired capacitor was not likely to have damaged the BBD, and agreed to help. The assembly seemed to have been done in a competent fashion and a quick check with the CRO confirmed that the clock and the BBD appeared to be functioning normally. A sine wave fed into the input socket was available at the output, albeit very attenuated.

Thus encouraged, I fed in a music signal and found that the single or echo function operated correctly, which seemed to exonerate most of the electronics, but that selecting reverb caused no change to the signal at all. A glance at the selector switch showed what seemed to be the problem; the type supplied in the kit was different from that illustrated in the instructions, and the wiring had been thoroughly



confused. A few minutes work sorted that out but there was still no change to the reverb function.

The circuit shows that the reverb loop includes the output amplifier (IC5) and, as I had already noted that the gain was down, I assumed that there was insufficient signal being fed back from the output for reverb to occur. A quick check confirmed that this stage was in fact attenuating the signal by around 10dB.

A check of components, in-circuit, with a multimeter showed the three 10kΩ resistors in series with the inverting input to be correct, but the 22kΩ feedback resistor measured low. As it appeared undamaged and was clearly marked with the correct value, I suspected that a wiring fault or damaged capacitor was causing a false reading.

Careful inspection of the board revealed no such damage, so one end of the 22kΩ resistor was lifted out of circuit. It measured 2kΩ — little wonder that the IC was not amplifying! It was a common 5% half-watt type with a light painted body, clearly marked red-red-orange (not burnt red either) so I was forced to the conclusion that it had been incorrectly marked during manufacture.

Needless to say, substitution of a correct value restored the lost gain and

made the unit wholly functional, much to the delight of the owner. This is the first time I have encountered a new resistor with its value incorrectly marked and, although it must be quite rare thanks to manufacturers' quality controls, it is a possibility we need to bear in mind.

Thank you J.A. for a most interesting story, and one which carries some kind of a message for all home constructors — and perhaps servicemen too, come to that. Many home constructors I know insist on measuring all resistors and capacitors on an RC bridge before they fit them, regardless of their source.

And, I understand, it is surprising how often a component with a fault of some kind is found. Granted, it may be only one in a whole kit, consisting of dozens of minor components, but it can lead the constructor a merry dance once it is in circuit. As one of them put it, "if you check them all as they go in, they are the last thing to worry about if the device doesn't work, and it narrows down the suspects considerably".

As for the wrongly marked resistor itself, I agree that this is a puzzle, although I have encountered a couple of these myself over the years. How does it happen? Quite frankly, having seen resistors being made on modern automated production lines, I would

have been prepared to swear that it couldn't happen, had it not been for the hard evidence encountered by both myself and J.A.

When resistors are made they enter a machine as blanks at one end and are trimmed to value, bridged, rejected if out of tolerance, and finally painted and colour coded, the latter via wheels or jets charged with the appropriate colour. And all without human intervention.


So how can a single wrongly coded resistor be created? A wrongly charged colour wheel or jet is, of course, conceivable, but this would produce a whole batch of wrongly coded units, with resultant confusion right through the industry.

But wait a minute. Suppose that such a mistake was made and a batch, or even a small part of a batch, was produced before the mistake was noticed. The manufacturer's immediate reaction would be to collect all the faulty units and either destroy them or arrange to have them re-processed, which ever he felt was most economical.

The only snag is that one or two of these could easily escape the collection process, and eventually find their way into stock where they would be binned according to their face value.

Well, that's the only explanation I can offer.

## Plug into 'Eveready' rechargeables.

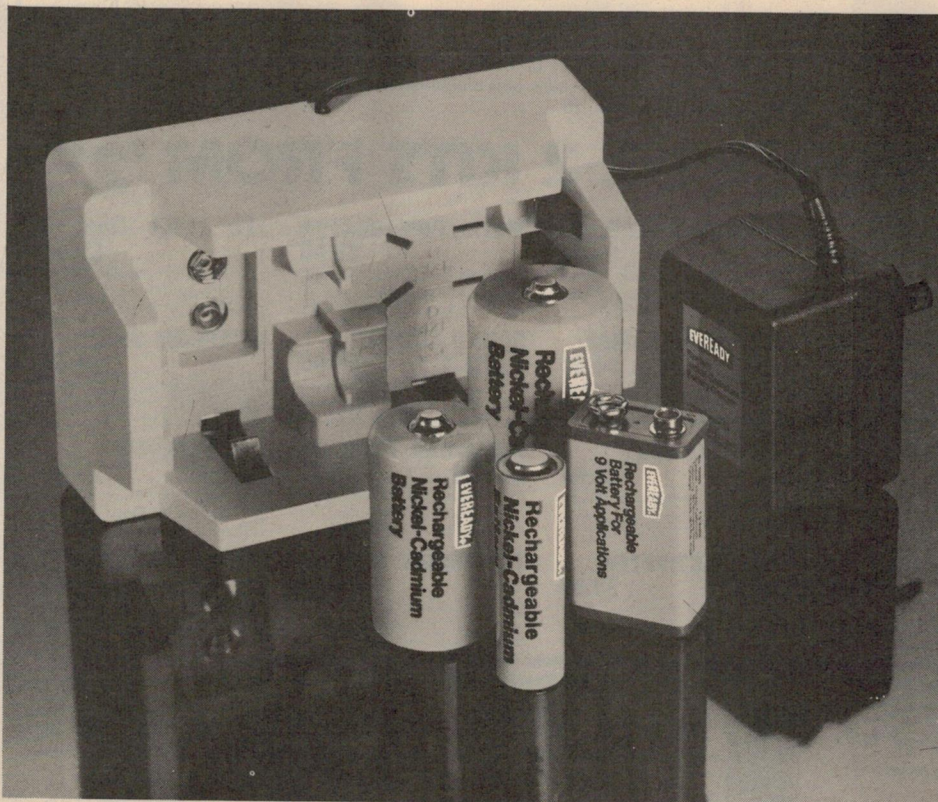

Our rechargeable range, in popular sizes, can be charged up to 1000 times on the new model ACC50E Charger, thus offering an extremely economical power source to the heavy-battery user. Especially ideal for photo-flash, movie cameras, tape recorders, transceivers and electronic games and toys.


Please don't hesitate to call for further information.

**EVEREADY**

### Rechargeable Nickel-Cadmium Batteries.

Union Carbide Australia Limited,  
Battery Products Division,  
157-167 Liverpool Street, Sydney.  
Phone: 269 0656

SALES OFFICES:  
Brisbane: 47-49 Sherwood Road,  
Toowong. Phone: 371 6877.  
Adelaide: 121 Greenhill Road,  
Unley. Phone: 272 0611  
Melbourne: 14 Queens Road.  
Phone: 26 1241, 26 2332.  
Perth: 901 Hay Street.  
Phone: 321 2926.



Eveready and Union Carbide are registered trade marks. 085.P834A



# GET INTO ELECTRONICS FOR \$4.95

OVER 50,000 SOLD!

## WITH DICK SMITH'S FUNWAY INTO ELECTRONICS

This is the top selling Fun Way Into Electronics Vol. 1 that has proven that electronics can be fun. For the raw beginner, this book introduces 20 exciting projects that can be built by using a unique 'breadboard' construction system - no soldering, so it's safe. Each project is fully illustrated so that mistakes are virtually impossible. This top-selling book is now into its fourth printing proving just how popular it has been. Don't miss out!

ONLY \$4.95

## Vol 1 KITS

### Kit to build projects 1-10

You can build any of the first ten projects from 'Fun Way Into Electronics' with this kit. It even includes the base board on which you assemble the circuits! Cat K-2600

### Kit to build projects 11-20

This kit contains the slightly more specialised components which, together with the components from kit 1, will enable you to make any of the projects in the book.

\$7.25

\$7.90



## PARENTS PLEASE NOTE

All Fun Way Into Electronics kits are battery powered so they are completely safe. Also, Fun Way Vol. 1 kits require no soldering.

## FUNWAY VOL. 2 20 MORE PROJECTS

After mastering Fun Way Vol. 1 what better way to go than Vol. 2. In Vol. 2 you are introduced to printed circuit boards and soldering. Both are fully explained and illustrated and they give you the choice of making your own boards or buying ready made. The basic laws of electronics, plus chapters on component codes, assembly hints etc. are fully explained. .... Cat. B-2605

\$6.95

## FUNWAY VOL 2 KITS FROM \$2.95

### MULTI-PURPOSE LED FLASHER ...\$2.95

A really simple kit that can be used as a warning device, electronic jewellery, etc. Cat K-2621

### DING DONG DOORBELL \$4.50

Welcome visitors to your home with this integrated circuit doorbell! Cat K-2622

### MORSE CODE TRAINER \$4.50

This simple oscillator circuit lets you learn Morse code the easy way! Cat K-2623

### UNIVERSAL TIMER ...\$5.50

Use it as an egg timer, a dark-room timer, etc. in fact, it's got a lot of applications! Cat K-2624

### ELECTRONIC DICE ...\$4.95

Throwing a dice is old hat do it electronically! Simple circuit has other uses too. Cat K-2625

### MONOPHONIC ORGAN \$7.95

Easy to build, and easy to play! And it even has 'vibrato' - just like the big ones! Cat K-2626

### POCKET TRANSISTOR RADIO ...\$7.95

Simple to build, and it's nice and small. Listening is so much more fun! Cat K-2627

### TOUCH SWITCH ...\$5.50

One touch on, next touch off - or 'on while touched'. Dozens of uses in the home. Cat K-2628

### MOSQUITO REPELLER ...\$4.95

Do they really work? Research suggests they might. Find out for yourself. Cat K-2629

### SIMPLE AMPLIFIER ...\$6.50

A useful little amplifier for all those projects needing audio amplification. Cat K-2630

### WIRELESS MIC. ....\$6.50

A tiny transmitter that can be received on any FM receiver. A great little kit! Cat K-2631

### LIGHT ACTIVATED SWITCH ...\$5.50

Highly useful for alarms, night light switches, etc etc. Sensitive and reliable. Cat K-2632

### METAL/PIPE LOCATOR ...\$6.50

A simple BFO circuit you can use to find metals, pipes, wiring, etc - maybe gold! Cat K-2633

### SOUND ACTIVATED SWITCH ...\$6.95

Picks up sound waves and trips a relay. Use as a telephone bell extender, too. Cat K-2634

### HOME/CAR BURGLAR ALARM ...\$6.50

Learn how burglar alarms work when you install your own! For home or car. Cat K-2635

### ELECTRONIC SIREN ...\$4.95

Great for alarm use - or where any warning is required. Good for kids toys, too! Cat K-2636

### LED LEVEL DISPLAY ...\$8.95

This fascinating project shows you the audio level of any amplifier. Cat K-2637

### INTERCOM UNIT ...\$8.95

Communicate! Build this intercom and talk between rooms, etc. Cat K-2638

### LED COUNTER MODULE ...\$7.95

Learn how digital circuits work by building a counter. Count slot car laps, etc. Cat K-2639

### SHORTWAVE RECEIVER ...\$8.95

Listen in to the exciting world of shortwave radio: amateurs, foreign countries! Cat K-2640

SCHOOLS, RE-SELLERS, ETC.:  
We'll negotiate a special price for bulk quantities on either books or kits, or both!

# DICK SMITH ELECTRONICS



SEE PAGE 98 FOR ADDRESS DETAILS



# AND NOW FOR FUN WAY 3!

## 10 exciting new projects using integrated Circuits.

At last – the latest addition to our incredibly popular 'Fun Way' series. And this one gets right into the big time, using both digital and linear integrated circuits in a variety of projects.

Yes, there are still projects for the beginner – and there are projects for the more advanced. And we're sure you'll find the projects even more satisfying, more fun both to build and use.

Plus, like the other 'Fun Way' books, special cut-out labels to give your projects a real professional finish.

Hurry! Get your copy now . . . ideal Christmas gift.

- 100 pages
- 10 brand new and exciting projects to build and use
- Every project fully explained with printed circuit layouts, etc.
- Especially written to suit all ages and experience levels.

**\$6<sup>95</sup>**

ONLY

Cat B-2610

Schools, Re-sellers, etc:

We offer discounts to quantity (above 10) purchasers. Call our wholesale division on (02) 888 3200

**GET YOURS NOW!**

## KITS FROM **\$7<sup>95</sup>**

### Minder

.....**\$7.95**  
A multi-purpose project for the car: 'lights on' warning, 'door open' warning, plus a burglar alarm flasher. Cat K-2660

### Two-Up

.....**\$9.95**  
Australia's national game – now done electronically because King George pennies are hard to get! Cat K-2661

### Lil Pokey

.....**\$19.95**  
It's a barrel of fun to play. And you don't risk losing your shirt like on the real thing. Cat K-2662

### Nocturnal Stridulus Gryllidae

.....**\$9.95**  
Whaaa! That's a cricket to you. Hide it in a dark room and it starts chirping. Turn the light on and it stops. It's infuriating! Cat K-2663

### Mini Colour Organ

.....**\$12.95**  
Like a disco – but battery operated so it's safe! Connect to your radio, etc for a LED lightshow. Cat K-2664

Educational & Safe

## DICK SMITH'S FUN WAY INTO ELECTRONICS Volume 3

ONLY  
**\$6<sup>95</sup>**

- 10 exciting projects including a mini Synthesizer, Night Cricket, Stereo Amplifier and Combination Time & Lock Switch.
- Masses of information – you can't go wrong!
- PLUS pre-printed labels to give your projects a professional finish.

INTEGRATED  
CIRCUITS



### Light & Sound

.....**\$8.95**  
Another multi-talented project. Sound effects, flashing lights – continuity tester, Morse code oscillator . . . it's got the lot. Cat K-2665

### Combination Time Lock Switch

.....**\$12.95**  
Make it into a game . . . or use it as a real alarm component. It's that good! Just try getting into this one without setting off the alarm. Cat K-2666

### Mini Stereo Amplifier

.....**\$14.95**  
Just the shot for 'Walkie' stereo – now you can listen to it in your bedroom through speakers! Or make yourself a PA amplifier. Cat K-2667

### Binary Bingo

.....**\$19.95**  
A game of skill and reaction time – and a valuable teaching aid! It might sound pretty simple to play – but try it and see! Cat K-2668


### Mini Synth

.....**\$19.95**  
Wow! A real musical synthesiser, with decay, frequency doubling & halving, tremolo . . . unique circuit uses YOU as the note generator! Cat K-2669



# Circuit & Design Ideas

Interesting circuit ideas from readers and technical literature. While this material has been checked as far as possible for feasibility, the circuits have not been built and tested by us. As a consequence, we cannot accept responsibility, enter into correspondence or provide constructional details.

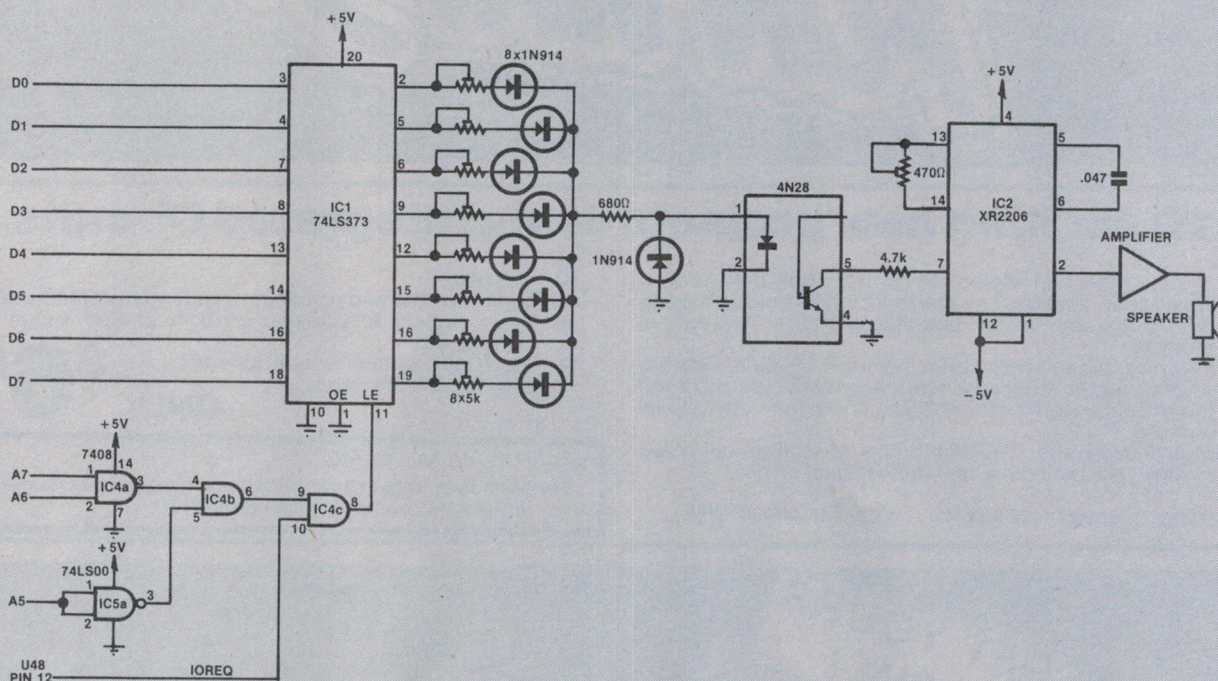

## Tone generator for Super-80 computer

Readers who built the Super-80 computer may be interested in this programmable tone generator.

At the heart of the circuit is an XR2206 function generator IC (IC2). This IC normally produces a triangle wave output but, in this application, has been wired to produce a sinewave output by connecting an external pulse-shaping resistor (470Ω trimpot) between pins 13 and 14. In practice, the trimpot is adjusted to

give the lowest distortion.

The output frequency is controlled by a transistor inside optocoupler IC3 which simply varies the current flowing from pin 7 of IC2. The current through the transistor is dependant upon the LED brightness and this is set by the current flowing through the 5kΩ trimpots connected to the outputs of a 74LS373 8-bit latch (IC1). IC4 and IC5 provide address decoding for the latch enable (LE) pin of IC1.

The prototype was built on a double-sided PCB which plugs

directly into the onboard S100 slot. This board was fitted with separate 5V voltage regulators. The connection from pin 12 of U48 can be run to an unused pin on the S100 socket.

Setting up is simple. Send the values 1, 2, 4, 8, 16, 32, 64 and 128 in turn to the latch at address 222D and adjust the trimpots to give the desired tones.

N. Clark,  
Wynnum North, Qld.

**\$15**

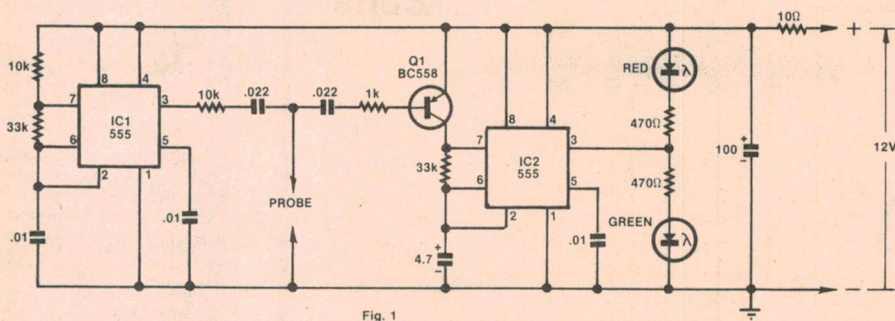



Fig. 1

## Fluid level detector

This circuit was originally designed to detect low fluid level in a vehicle radiator, although it could also be used as a "tank filled" or "tank empty" indicator. The circuit is straightforward and uses two 555 timer ICs.

To eliminate the problem of electrolysis, AC current is applied to the probes. 555 timer IC1 operates as a 1kHz astable oscillator, the output of which is AC-coupled to the level probe and also



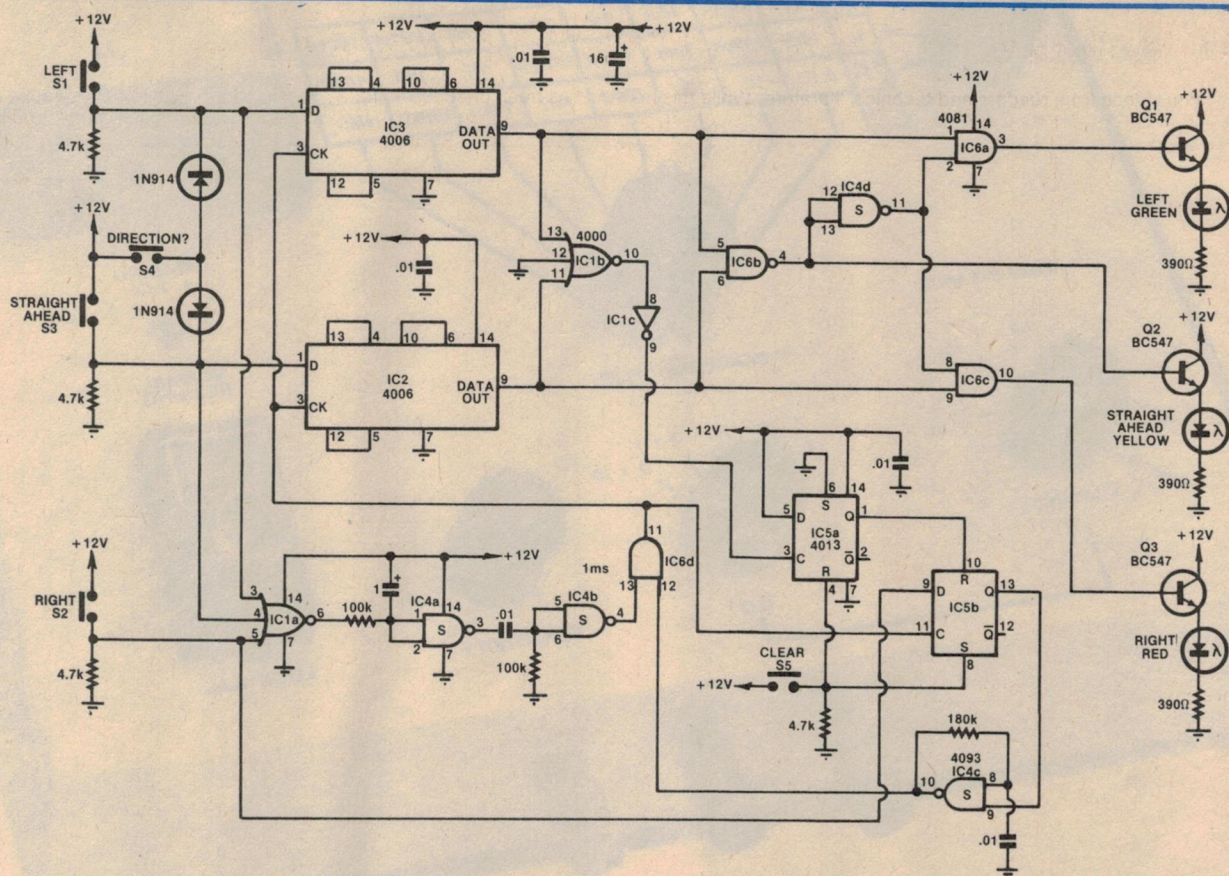

## Simple car navigation aid

When reference has to be made to a street directory it can be difficult to remember the sequence of directions for the journey. With this device, the driver can program the route into two shift registers. Thereafter, if the direction switch is pressed at each intersection, the device will light one of three LEDs to indicate left turn, right turn or straight ahead.

It works like this. The device is programmed using switches S1, S2 and

S3. Each time a switch is pressed, data is clocked into the shift registers (IC2 and IC3). Subsequently, when direction switch S4 is pressed (ie, when an intersection is approached), data is clocked out of the shift registers and decoded by gates IC6a, IC6b, IC6c and IC4d. These gates, in turn, control LED-driver transistors Q1, Q2 and Q3.

IC1a, IC4a and IC4b provide the necessary pulses to clock data into and out of the shift registers. When any of the switches S1-S4 is pressed, the output of IC4a goes high and applies a 1ms positive-going pulse to IC4b via a .01uF

capacitor. This pulse is inverted by IC4b and gated through to the clock inputs of IC2 and IC3 by IC6d.

S5 is used to clear the contents of the shift registers before programming commences. It works with D flipflop IC5b to enable Schmitt trigger oscillator IC4c, the output of which then clears the shift registers by rapidly clocking data out. IC1b, IC1c and IC5a provide an automatic clear function at the end of the programmed sequence (ie, when the outputs of both shift registers are low).

G. Argall,  
Lilydale, Vic.

**\$20**

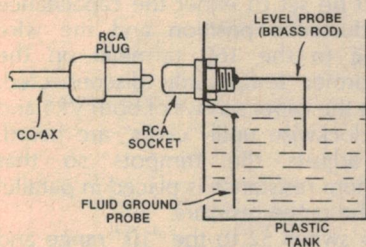


Fig. 2

When fluid is in contact with the level probe, the output of IC1 is shunted to ground and Q1 is off. Thus, the output of IC2 is high and the green LED lights to indicate that the tank is full.

When the water level drops below the probe, Q1 is switched on and off at a 1kHz rate and supplies current to IC2's RC timing network. IC2 now functions as a 1Hz astable oscillator which alternately flashes the red and green LEDs.

Note that the fluid in the tank must be at ground potential for the circuit to work. If the tank is made of metal, it can

be connected to the circuit earth and a single probe used to detect the fluid level. If the tank is made of plastic, it will be necessary to add a fluid ground probe as shown in Fig.2.

Finally, if the unit is to be installed in a vehicle, use RG-58U coax for the probe cable and connect the shield to the circuit earth. This measure will prevent false triggering due to ignition spikes. You will also have to fashion a suitable radiator probe.


P. Mann,  
Robinvale, Vic.

**\$15**

to the base of transistor Q1. Q1, in turn, controls 555 timer IC2 which is a LED flasher circuit.



by JEFF SKEEN

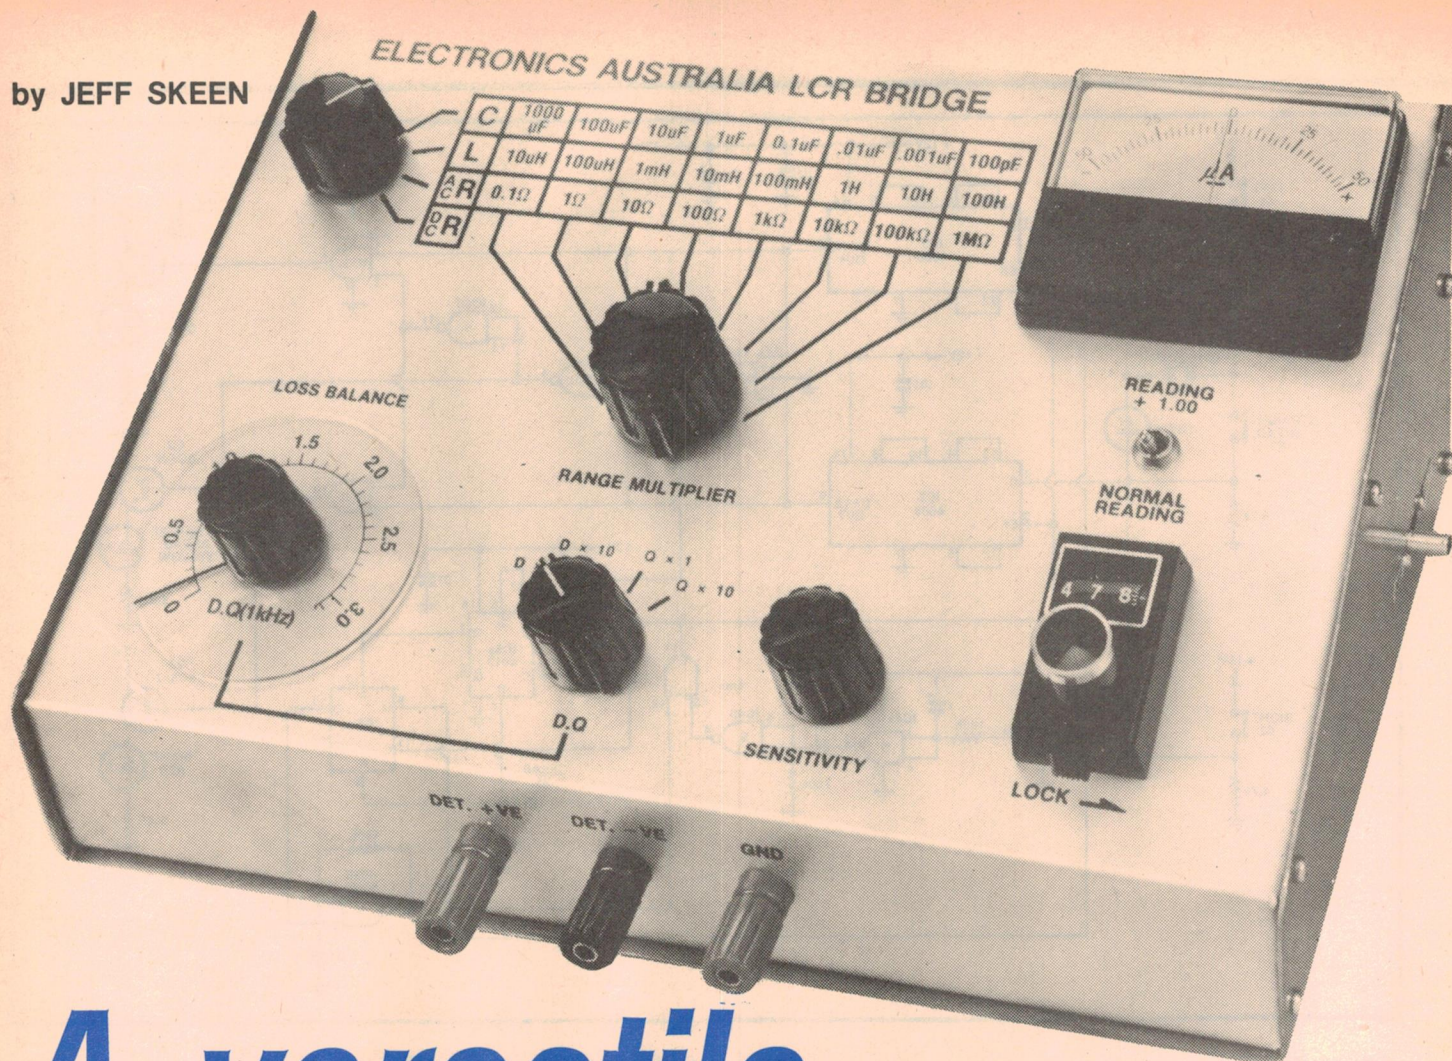

# A versatile LCR Bridge

## PART 3

### —for laboratory & workshop

*In this third and final article on our LCR Bridge we present the calibration procedure and give instructions on how to use the bridge in its various measurement modes.*

Assuming that you have constructed our new LCR Bridge there remains the final task of calibration. This is a fairly easy and straightforward procedure although care should be exercised since

ultimately the accuracy of the bridge depends upon it.

Superficially, a design such as this should have little need for calibration. After all, close tolerance standard

components are specified. However, all those switches and wiring inevitably add resistance to the circuit as well as stray capacitance. We have already talked (last month) about the measures used to minimise stray capacitance. Resistance is another matter and is taken into account by the calibration procedure.

The first step then is to adjust the lowest value range resistors, via VR2 and VR3. The procedure requires an adjustable power supply and two multimeters which should preferably be digital types since they have the best resolution and accuracy.

To isolate the range resistors, switch S1 should be set to either the capacitance or inductance position and the wire leading to the 16Ω terminal on the transformer temporarily disconnected. Rotate the wiper screws of both VR1 and VR2 clockwise until "clicks" are heard. This adjusts the trimpots so that maximum resistance is placed in parallel with the range resistors.

Now switch S2 to the "1Ω" range and connect the circuit shown in Fig. 1 to tests points TP1 and TP2. These test points are shown on the circuit diagram on page 46 of last month's issue and on the accompanying wiring diagram on page 47.



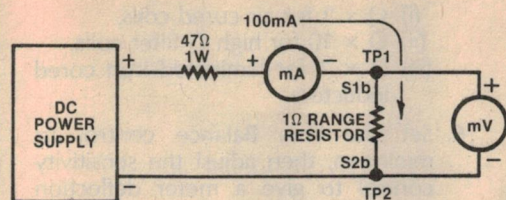


Fig. 1

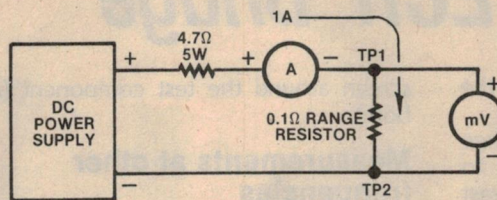


Fig. 2

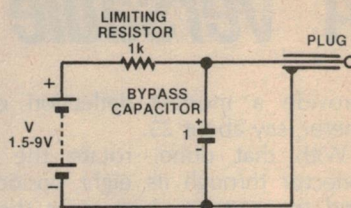


Fig. 3

Switch on the power supply and adjust the output voltage until 100mA flows through the 1Ω range resistor. This will be indicated by the meter which, if it is a DVM, should be set to the 200mA range. Then rotate the wiper screw of VR3 until the voltmeter (DVM set to 200mV) indicates 100mV. It may be necessary to adjust the power supply voltage slightly to maintain the current at 100mA during the adjustment of VR3.

That is all that is required to calibrate the "1Ω" range. The procedure for the "0.1Ω" range is very similar. This time though we use the circuit of Fig. 2 which shows a 4.7Ω/5W resistor instead of a 47Ω/1W resistor.

Set S2 to the "0.1Ω" range and adjust the power supply output voltage to provide a current of one amp through the circuit. If the ammeter is a DVM it should be set to the 2A range. VR2 is then adjusted until the voltmeter again reads 100mV.

This completes calibration of the 0.1Ω range. Remove the circuit used for calibration of the range resistors and solder the lead back on the transformer 16Ω tag.

The next step is to adjust the 1kHz oscillator. Disconnect one of the null meter leads (this spares the meter from possible long periods of overload) and connect a multimeter between ground and the output of IC1c. Set the multimeter to an AC volts range greater than 10V and switch the LCR bridge on (either battery or AC power).

Depending on the initial setting of VR1, the multimeter may or may not indicate a reading. In either case, VR1 should be adjusted so that the multimeter reads zero (ie no oscillation) and then VR1 should be slowly turned until the multimeter reads between four and five volts. Turn VR1 a shade further to ensure reliable start-up of the oscillator, and adjustment is complete.

If the oscillator refuses to start the most probable reason is lack of range in VR1. Replace VR1 with a 500Ω potentiometer and repeat the oscillator adjustment procedure. If the oscillator still refuses to start, the most likely cause is incorrect or out of tolerance components in the oscillator circuit. These should be located and replaced.

If you have access to a frequency

counter you may wish to trim the oscillator frequency to exactly 1kHz. Adjustments are made by changing the .0018μF capacitor to a higher or lower value. Increasing the .0018μF capacitor to .0022μF will lower the oscillator frequency by about 10Hz while decreasing the capacitor to .0015μF will increase the oscillator frequency by about 10Hz.

The final calibration step involves adjusting out the DC offsets of IC3 and IC4.

Temporarily unsolder the wires leading from S1 to the inputs of IC3 and IC4 and in their place run a wire from each op amp input to a grounded PC pin. Connect a multimeter set to the 200mV range between the grounded PC pin and the output of IC3. Set S1 to the Rdc position, turn the LCR bridge on and rotate the sensitivity control to half maximum. Adjust VR4 so that the multimeter reads zero then increase the sensitivity control to maximum and again adjust VR4 so the multimeter reads zero.

The last adjustment may be a little touchy since with the sensitivity control set to maximum the op amp is amplifying changes in the offset voltage by 150 times. Some small random variations in the output voltage will be noticed at maximum sensitivity. These are due mainly to amplified noise and can be neglected since they will average out to zero.

The multimeter lead should now be swapped over from the output of IC3 to the output of IC4 and the sensitivity control set back to half. The adjustment procedure detailed for IC3 is now repeated for IC4. Following this, the multimeter should be connected between the outputs of IC3 and IC4. With the sensitivity control set to maximum the voltage should be almost zero ie, less than ±3mV (except for small noise variations). Both IC3 and IC4 are now adjusted for minimum offset voltage.

This completes the calibration procedure. The null meter should be reconnected and the grounding wires at the IC3 and IC4 inputs removed and the original wires from S1 reconnected. The final step is to place a small dot of white paint on the digital readout between the first and second digits to act as a decimal

point. When turned to the zero position the display should read 0.00. The LCR bridge is now ready to use.

## Using the bridge

A bridge such as this may seem a little daunting to use at first when compared to measuring components with digital capacitance meters and the like. Instead of just bunging the component across the terminals you also have to twiddle the dials.

So how do you go about measuring components with the bridge? To make things simple it is a good idea to first rotate the DQ control to its minimum setting. A low setting, almost fully anti-clockwise, should also be used for the sensitivity control. If you use a high setting initially the meter will inevitably be hard off scale.

Incidentally, the meter deflection will always be to the right of zero for AC measurements (AC resistance, capacitance and inductance) but for DC resistance measurements it will swing through zero as the null or balance point is passed. When the meter needle is to the left of zero the resistor value is lower than the bridge setting; when the meter needle is to the right of zero the resistor value is higher than the bridge setting.

So for DC resistance measurements the null condition will be in the centre of the meter scale and the meter pointer will swing either side of zero as the null condition is approached.

For AC measurements the null condition is as close to zero on the meter scale as you can get it and if you are not at the null condition, the meter pointer will be deflected to the right.

Now connect the unknown component to the terminals on the front of the bridge. Make sure that you are making a good connection to both leads of the component. With some types of binding post terminals we have found that the only way to make sure of a good connection is to pass the component leads through the holes in the terminal posts and then screw them up tightly.

Switch the bridge on and rotate the mode selector to C, L or R (AC or DC) depending on the type of component being measured. Set the digital vernier control to about half scale; eg, around 5.00. Now set the sensitivity control to



# A versatile LCR Bridge

provide a modest deflection of the meter, say about 25.

With that done, rotate the range selector through its eight positions to find the setting which gives the least pointer deflection (ie, the closest to zero). Now rotate the vernier control to the setting which gives the minimum pointer deflection. You will find that as you approach this null, you will have to rotate the sensitivity control clockwise to give more meter deflection.

This process is continued until you have the best null condition, ie, the pointer as close to zero as you can get it with the sensitivity control at maximum clockwise setting. Then, and only then, do you try manipulating the DQ control if you are measuring a capacitor or inductor. For the majority of capacitors, with the exception of electrolytics, the dissipation value will be almost negligible.

Once you have achieved the best null possible, you have to read the component value off the bridge. This is done by multiplying the setting of the digital vernier control by the setting of the range multiplier. For example, if the range multiplier is set to "0.1 $\mu$ F" (for capacitance) and the vernier reading is 4.73, the capacitor value is 0.473 $\mu$ F.

If you have used the range extension switch which adds "1.00" to the reading, the previous value would become 5.73  $\times$  0.1 $\mu$ F which equals 0.573 $\mu$ F.

The procedure for measuring resistors and inductors is similar and is outlined in step-by-step form at the end of this article.

## Residual capacitance

When measuring capacitors on the 100pF range, the residual capacitance of the bridge must be removed from the reading otherwise an unacceptable error may result. To do this, the bridge is first balanced with the terminals open circuited to obtain the bridge residual capacitance, then the unknown capacitor is measured. The residual capacitance is then subtracted from the bridge reading to obtain the true component value.

The bridge has the option of being powered either by batteries or 12VAC (or both). When AC is connected to the bridge the best null may not be as low as when batteries alone are used. This is due to stray capacitance between the test component, the mains and ground inducing a spurious 50Hz signal across the component. The effects of this signal may be minimised by running a wire between the case of the LCR bridge and mains earth or by placing an earthed

screen around the test component (or both).

## Measurements at other frequencies

Measurements of capacitance, inductance and AC resistance may be carried out at frequencies other than 1kHz by connecting an audio oscillator with a maximum output of 2V RMS to the EXT AC EXCITATION socket. Be careful not to exceed the maximum signal voltage as this can lead to an incorrect null being obtained. When using frequencies other than 1kHz, multiply the D and Q scales by a factor of  $f/1000$ , where  $f$  is the signal frequency in Hz.

## External bias

A polarising DC voltage may be applied to the capacitor under test via the "Ext DC Bias" socket. Application of a DC bias generally does not cause a large change in capacitance (a 1% change would be typical) unless the bias is left on for a long period. The bias supply needs to have a limiting resistor to prevent possible damage to the range resistors if the capacitor under test becomes short circuit, and a bypass capacitor to allow a low impedance path for the bridge energising signal.

A suitable schematic diagram for the bias supply is shown in Fig. 3. Using the voltage shown, the limiting resistor should be about 1k $\Omega$  while the bypass capacitor should be at least the full scale value of the range in use, or 1 $\mu$ F, whichever is larger, and of a suitable voltage rating.

The bias supply is connected so that the tip of the jackplug is connected to positive and the body is connected to negative. When the plug is inserted in the Ext bias socket, the Det +ve terminal of the bridge will be positive with respect to the Det -ve terminal and so the capacitor under test should have its positive lead connected to the Det +ve terminal. To prevent any possibility of damage to the bridge, the bias supply should be disconnected before changing the bridge configuration or switching the bridge off.

## Inductance measurement

1. Connect the unknown inductor between the Det +ve and the Det -ve terminals.
2. Set the component selection switch to inductance.
3. Turn the LCR bridge on.
4. Use the range multiplier switch to select the range in which the inductor value is expected to lie.

5. Set the DQ switch initially to:

- (i)  $Q \times 1$  for air cored coils,
- (ii)  $Q \times 10$  for high Q filter coils,
- (iii)  $D \times 1$  for laminated iron cored inductors.

6. Set the Loss Balance control to minimum, then adjust the sensitivity control to give a meter deflection under full scale.
7. Alternately rotate the digital readout knob and the loss balance control so that the meter deflection decreases. When necessary, increase the sensitivity control to provide a better null indication.
8. When there is no more range left in the sensitivity control, or it becomes impossible to obtain a lower meter deflection, the bridge is nulled. The component value is obtained by multiplying the dial reading and the selected inductance range together as described previously.

## Low Q inductors

For inductors with a Q less than 0.5, the bottom of the null flattens out and it may become impossible to find the minimum null point. This problem occurs mainly with low value RF inductors which have a fairly large series resistance in comparison to their inductance. The problem may often be circumvented by measuring the inductance at a higher frequency, say 10kHz. This raises the Q value by a factor of  $f/1000$  (at 10kHz this equals 10) and so provides a better null.

## High Q inductors

If an inductor has a Q higher than 31 at 1kHz it must be measured either at a lower frequency (to lower the Q) or on the  $D \times 1$  setting of the DQ switch. In this case, the D value of the inductor is read off the loss balance dial and the corresponding value of Q is found from  $Q = 1/D$ . In practice, the value of the loss balance dial will be too small to allow an accurate determination of D and so any calculated Q will be a "ball-park" figure only.

## Inductor bias

Due to the non-linear characteristics of iron and ferrite core inductors it is sometimes necessary to know the incremental inductance of a coil at a particular operating point. This is done by using a DC bias current to bring the characteristic to a particular point on the B-H curve while measuring the inductance with a small AC signal.

The circuit shown in Fig. 3 is suitable for providing DC bias currents, the only changes being that an ammeter should be placed between the voltage supply and the limiting resistor to monitor the current and either the limiting resistor or the voltage supply should be made



variable so that the bias current can be varied.

### AC resistance

1. Connect the unknown resistor between the Det +ve and the Det -ve terminals.
2. Set the component selection switch to AC resistance.
3. Turn the LCR bridge on.
4. Use the range multiplier switch to select the range in which the resistor value is expected to lie.
5. Set the sensitivity control to give a meter deflection of around three quarters full scale.

There is no need to worry about the settings of the DQ switch and the loss balance control when measuring AC resistance since these controls are switched out of circuit. When measuring high value and wire wound resistors, series inductance and shunt capacitance components will cause the AC resistance (or impedance) to be different to the DC resistance (or marked value). For this reason it is usually better to measure these types of resistors using the DC resistance mode.

6. Rotate the digital readout dial so that the meter deflection decreases. When necessary, increase the sensitivity control to provide a better null indication.
7. When there is no more range left in the sensitivity control, or it becomes impossible to obtain a lower meter deflection, the bridge is nulled. The component value is obtained by multiplying the dial reading and the selected resistance range together as described previously.

### DC resistance

1. Connect the unknown resistor between the Det +ve and the Det -ve terminals.
2. Set the component selection switch to DC resistance.
3. Turn the LCR bridge on.
4. Use the range multiplier switch to select the range in which the resistor value is expected to lie.
5. Set the sensitivity control to give a meter deflection of around three-quarters full scale.
6. Rotate the digital readout dial so that the meter deflection decreases. When necessary, increase the sensitivity control to provide a better null indication.
7. When there is no more range left in the sensitivity control or it becomes impossible to obtain a lower meter deflection the bridge is nulled. The component value is obtained by multiplying the dial reading and the selected resistance range together as described previously.

## PROBLEMS WITH YOUR POWER SUPPLY?

A Line Tamer ensures constant voltage and interference suppression for your computer... gives a nominal 240V from fluctuating supplies as low as 190V... eliminates spike voltages caused by lightning etc.



## YOU NEED A LINE TAMER®

There's a Line Tamer to suit your installation. Send for data.

Ferguson Transformers Pty. Ltd.

331 High Street, CHATSWOOD 2067 Tel: (02) 407 0261

Telex: AA25728. Melbourne (03) 328 2843

\*Registered Trade Mark of Ferguson Transformers Pty Ltd

# FERGUSON

## ELECTRONICS AUSTRALIA STAFF VACANCIES

Electronics Australia currently has two vacancies on its technical staff as follows:

### Project designer:

The person applying for this position will have completed or be part way through an electronics engineering course. Duties will include the design and construction of electronic projects such as commonly appear in this magazine. The ability to write well would be a decided advantage.

### Technical writer/sub-editor:

The applicant for this position will have a wide background in electronics coupled with a good knowledge of computers and perhaps an engineering or science degree. He or she will be expected to research and write feature articles, and also to write constructional project articles from basic engineering notes.

Permanent positions are envisaged in each instance, with full provision for leave, sickness and superannuation. Salary is dependent upon qualifications and will be discussed at interview.

Apply in writing to:

The Editor,  
ELECTRONICS AUSTRALIA,  
PO Box 163, Chippendale 2008.



# JAYCAR-YOUR No. 1 SOURCE FOR ELECTRONICS

## CONTACTLESS HALL-EFFECT "BREAKER POINTS"

A professionally engineered electronic ("breakerless") contact breaker system.

Yes, only Jaycar has a complete Hall-Effect triggerhead assembly designed to adapt to an extensive number of cars. Each kit contains the following:

- HALL EFFECT TRIGGERHEAD
- MAGNETIC ROTORS FOR BOTH 4 & 6 CYLINDER CARS
- OVER 6 CAM-LOBE ADAPTORS
- OVER 12 DIFFERENT ADAPTOR PLATES FOR YOUR PARTICULAR DISTRIBUTOR
- OTHER HARDWARE (i.e. SCREWS etc.)
- YOU CAN REMOVE THIS SYSTEM AND RE-EQUIP YOUR CAR WITH THE ORIGINAL BREAKER POINTS WHEN YOU SELL THE CAR!
- AS EASY TO INSTALL AS A SET OF POINTS
- INSTRUCTIONS (SIMPLE-TO-FOLLOW) INCLUDED

This set is designed to fit most European and Japanese cars. In fact it will also fit many Australian cars fitted with Lucas, Bosch, Motorcraft, AC Delco or Autolite electrics. If you wish to check first, please send SAE for car/distributor list.



SEE EA DECEMBER 1983

Because we have no way of knowing, you get the fitting set for ALL of the distributors available. Basically you end up with a jar full of parts you don't need to use! (Perhaps for your next car?)

Quite frankly, we are amazed that we can supply such a comprehensive kit for this price. To produce a kit that will adapt to the dozens of different distributors around is amazing! Remember, once you have installed a breakerless system it will never wear out and that part of your system will remain in tune FOREVER.

Cat. KJ-6655  
PLEASE NOTE: This system must be used in conjunction with an electronic ignition. The Hall-Effect device will not switch enough current to replace the contact breaker points on their own!

# \$29.95

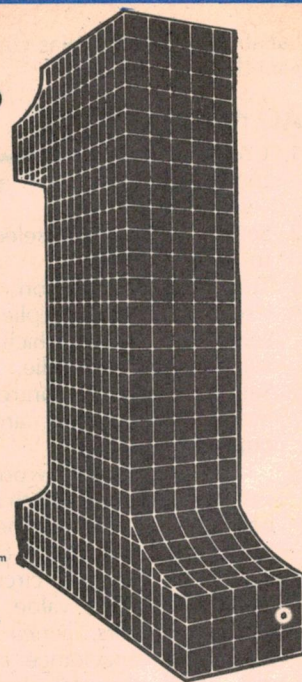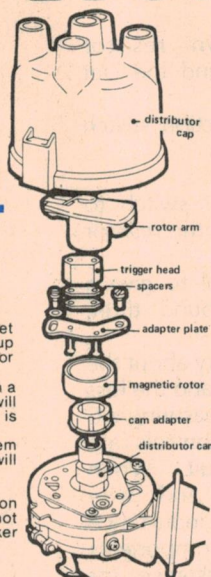

## TRANSISTOR ASSISTED IGNITION HALL-EFFECT "BREAKERLESS" VERSION

# \$36<sup>95</sup>

REF: EA DECEMBER 1983

This kit is virtually identical to the KA-1506 except that it contains the interface electronics for the KJ-6655 Hall-Effect triggerhead.

Cat. KA-1505

## TRANSISTOR ASSISTED IGNITION

# \$35

REF: EA JANUARY 1983

Latest version of this fantastically popular kit! The Jaycar kit comes COMPLETE down to the plastic TO-3 transistor covers, genuine heatsink and DIECAST BOX - as used in the original EA unit. Beware of flimsy kits that use sheetmetal boxes.

This kit is designed to be used with contact breaker points. If you want Hall-Effect breakerless option may we suggest the KA-1505 version of this kit shown

**BELOW  
MANUFACTURER'S  
COST!!**

## CAR COMPUTER—PRICE SLASHED! — HUGE SCOOP PURCHASE —

**ONLY  
\$125  
COMPLETE  
MASSIVE SAVING  
OF \$74**



## FULL 90 DAY WARRANTY

At \$199 the Voyager Car Computer represented absolutely outstanding value for money. No one else had such a low priced, FULL FUNCTION car computer. The Voyager is the only low-cost unit that will give you full consumption (the most important feature in a car computer) in both metric litres/100km AND good old MILES PER GALLON!

At \$199 many, many hundreds have been sold. NOW you can grab one absolutely complete for only \$125 — a saving of 37% or \$74!

The Voyager comes absolutely complete with all fitting hardware — even down to a roll of insulation tape! Installation generally takes between 4 and 6 hours depending on vehicle.

or by mail order to:  
Jaycar  
Box 185  
Concord 2137

Jaycar Sydney (City) 264 6688/267 1614  
Jaycar Concord 745 3077  
Jaycar Carlingford 872 4444  
Jaycar Hurstville 570 7000  
Zap Electronics Parramatta Hornsby

Rod Irving  
Melb A'Becket St  
Northcote  
Altronics Perth

The Voyager is available from the following dealers at your convenience:

(03) 347 9257  
(03) 489 8131  
(09) 328 1599

**Spare Flow Sensors:** Jaycar will be supporting this product for many years to come. To avoid problems changing cars, why not buy a spare fuel flow sensor? They are about the only things that wear out


Cat. XC2036  
ONLY **\$29.50**

AS REVIEWED  
OCT '82  
EA (p.26-28)  
ETI NOV '82 (p.26)

CAT. XC2010

## NEW IMPROVED MODEL!

### VOYAGER OPERATING FEATURES

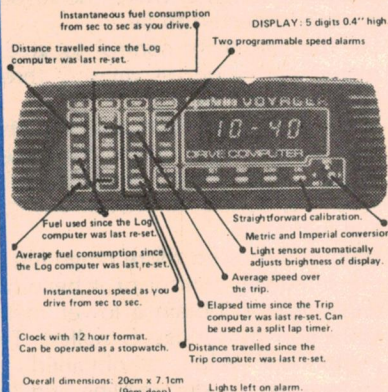

Mail Order By  
BANKCARD  
Via Your Phone

**STOP PRESS!! NOW OPEN ALL DAY SATURDAY (CONCORD STORE ONLY)**




## VCR SOUND PROCESSOR KIT

(Ref: EA April 1984)  
Great new kit for Video Enthusiasts! • Stereo Simulator • 5 Band Graphic Equalisation • Noise Filtering  
The Jaycar kit once again is truly original - down to the genuine multicoloured knobs on the front panel (watch for substitutes). The only extra that you will need to buy is the optional whistle filter (Cat. EE-3814 \$19.95)  
Cat. KA-1545

**\$55**

**NEW!!**

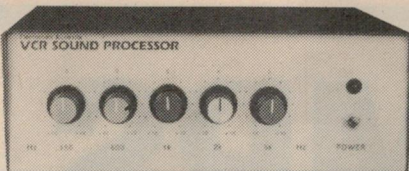

## NEW!! NEW FREQUENCY COUNTER ADD-ON FOR YOUR EA FUNCTION GENERATOR (Ref: EA April 1982)

Nifty little add-on that allows you to use your function generator to digitally measure frequencies up to 150kHz. It also improves linearity of scale. (Designed to fit inside function generator case)  
Cat. KA-1547

**ONLY \$12.00**

## NEW!! - DELUXE CAR BURGLAR ALARM

(Ref: EA May 1983) Great new design from EA. This one is very sophisticated. (Auxiliary battery extra) Complete kit of parts.  
Cat. KA-1550

## NEW!! - VIC 20 CASSETTE INTERFACE - (Ref: ETI May 1984)

This nifty little project enables you to interface your "common garden" cassette player to load/store into a VIC 20 computer. It means that you don't have to buy an expensive purpose-built cassette player! (Includes 0.156" edge connector)  
Cat. KE-4675

**\$19.50**

**\$69.50**



## NEW - MOTORCYCLE INTERCOM (Ref: EA March 1984)

Now you can talk freely and safely to your pillion passenger with this handy kit!  
Cat. KA-1533

**\$39.95**

## NEW - IGNITION KILLER

(Ref: EA March 1984) Handy little project fits under your car to foil thieves. At this price can you afford not to have one?  
Cat. KA-1535

**\$14.95**

## NOT NEW!! - EA DIGITAL CAPACITANCE METER

(Ref: EA September 1980) Ideal for a bench type mains powered application. Measures from 1pF to 99.99uF in only 3 ranges! Large easy to read LED display.  
Cat. KA-1105

**\$59.90**



## VIDEO ENHANCER

A simple but effective kit to help improve copy recordings of video tapes. Kit complete  
Cat. KA-1118

(Ref: EA October 1983)

**\$35.00**

300VA of power at 235V from an ordinary 12V car battery. Superb Jaycar kit is complete  
Cat. KA-1114

(Ref: EA June 1982)

**\$195.00**

## DUAL TRACKING #22V POWER SUPPLY - Dual polarity can provide up to #22V up to 2 amps. Also has fixed output of +5V at 0.9A. Complete kit

Cat. KA-1410

(Ref: EA March 1982)

**\$89.50**

## MUSICOLOR IV

Sound to light effect with 4 channel chaser. There are 4 different chaser patterns plus a host of other features. Complete kit  
Cat. KA-1010

(Ref: EA August 1981)

**\$89.90**

**ETI 1515 MOTOR SPEED CONTROL**  
Control the speed of your drill, saw, grinder, blenders etc. Effectively maintains speed over varying loads.  
Cat. KE-4031

**\$19.95**

## THE RED FLASHER - (not illustrated)

A de-luxe Swiss switch with electronics to make it flash plus deterrent stickers to make your car look as if it has an expensive alarm.  
Cat. KJ-7000

**\$20.95**

## BBD EFFECTS BOX - (not illustrated)

Bucket Brigade Delay line using the MN3001 device. Buy the kit complete with TU4 box for \$79 and for another \$10 you can have the special Jaycar pre-punched box (sold separately for \$29.50). If purchasing with special box the TU4 is not supplied.  
Cat. KE-1522

**\$79.00**

## PIPER MOUSE

This "microbot" is powered by 2 DC motors that drive wheels. When special ultrasonic whistle is blown, the unit goes left, right, straight ahead according to your command. Complete, including perspex dome cover! Be a Pied Piper!  
Cat. KJ-6680

**ONLY \$39.95**



## MICROBOTS® BACK!

We have secured another shipment of the two most popular Micro Robot kits. **SEE REVIEW IN EA MARCH '84!**

## MEMOCOON CRAWLER

This robot is controlled by a keyboard (which is supplied). The keyboard plugs into the robot. Up to 256 discrete commands can be entered into the robot's memory (RAM). The robot will then move according to programmed instructions. Lights and a buzzer can also be programmed to operate as well.  
Cat. KJ-6686

**ONLY \$79.95**

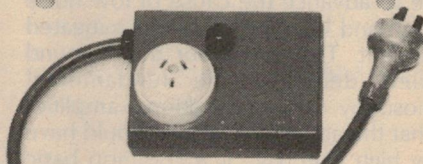

## NEW!!

## LOW COST 3 1/2 DIGIT LED PANEL METER KIT

build it yourself and save a fortune!  
★ Massive 16mm high digits ★ Very few external components required ★ plus/minus 199.9mV full scale ★ Input impedance 10 to the twelve ohms! ★ Requires only 5-6V @ 150mA! ★ Guaranteed to reset to zero at zero input voltage ★ Auto reverse polarity indication ★ IC sockets included ★ Instruction sheet shows application ★ Notes to build Digital Thermometer, Capacitance meter, Frequency Counter etc.

## STAGGGGERING VALUE

**\$29.95** Cat. KJ-6670


COMPLETE WITH ATTRACTIVE BEZEL AND INBUILT FILTER!!

## FUNCTION GENERATOR WITH DIGITAL READOUT

REF: EA APRIL 1982

This attractively housed (matches the KA-1350 DFM) unit produces sine, triangle and square waves over a frequency range from below 20Hz to over 160kHz with low distortion and good envelope stability. It has an inbuilt 4-digit frequency counter for ease and accuracy of the frequency setting.  
The Jaycar kit is complete and even includes a free Tilting Bail worth \$5.  
Cat. KA-1428

**\$99**



**Jaycar**

Incorporating  
**ELECTRONIC AGENCIES**

**SYDNEY**

SHOWROOMS

117 YORK STREET - PHONE: (02) 264 6688 and (02) 267 1614

TELEX: 72293

**CARLINGFORD**

Cnr. CARLINGFORD & PENNANT HILLS ROAD - PHONE: (02) 872 4444

**CONCORD**

115 - 117 PARRAMATTA ROAD - PHONE: (02) 745 3077

**HURSTVILLE** 121 FOREST ROAD - PHONE: (02) 570 7000

## NUMBER 1 FOR KITS

POST AND PACKING CHARGES  
\$5 - \$9.99 (\$1.50) \$10 - \$24.99 (\$3.20)  
\$25 - \$49.99 (\$4.50) \$50 - \$99.99 (\$6.50)  
\$100 - \$198 (\$8.00) Over \$199 (\$10)  
"Free INSURANCE for Road & Registered Post over \$200"  
All heavy or bulky items (over 20kg.) sent Comet Road Freight \$12.00 anywhere in Australia.  
SHOP HOURS CARLINGFORD, CONCORD & HURSTVILLE  
Mon - Fri 9am - 5:30pm: Sat - 9am - 12pm: Thurs night 8:30pm (Not Concord)  
SHOP HOURS SYDNEY  
Mon - Fri 8:30am - 5:30pm: Sat - 8:30am - 12pm: Thurs night 8:30pm  
MAIL ORDERS AND CORRESPONDENCE: P.O. Box 185, Concord, 2137



Mail Order  
By




**BANKCARD**

Via Your Phone

**STOP PRESS!! NOW OPEN ALL DAY SATURDAY (CONCORD STORE ONLY)**



# OP AMPS Explained

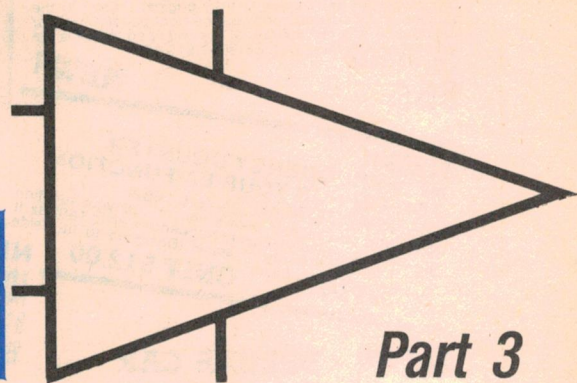

## Part 3

*High gain operational amplifiers are not known for their low noise performance. In this article, we examine the causes of noise and discover what can be done about it.*

The proliferation of high gain linear integrated amplifiers in the market place has done wonders in promoting circuit designs of high accuracy and linearity. Unfortunately, such progress has done little to advance the cause of low noise design and in many cases has mitigated against it. The reason for this is found buried deep in the fundamental philosophy of the operational amplifier — that the amplifier block  $G$  should have very high gain. Fig. 1, a common basic circuit, is expanded in Fig. 2 to show the action of the differential first stage.

In part one of this series we saw that at  $x$ , the inverting input of a high gain amplifier  $G$ , the feedback action and the high open loop gain combine to produce a low effective impedance to ground (the "virtual earth") and a very low signal voltage. Typical values for the case of closed loop gain = 10 are given in Table 1. The three integrated circuits named are available over the counter from a number of manufacturers.

In the application given in Table 1, all three types will give excellent results as regards DC stability, gain stability, linearity, and low sine wave distortion. Note, however, that the signal level applied to the input of the long tail pair is measured in microvolts. It is well known

that every semiconductor junction generates noise, again usually of the order of some microvolts. As the input point  $x$  is applied directly to the first transistor junction (ie, to the base), it follows that if the signal voltage at  $x$  is as small as the junction noise voltage, then we will have a very noisy amplifier.

Because of the high again of  $G$ , the basic operational amplifier is fundamentally noisier than other designs. This is no slight on any manufacturer nor on any integrated circuit type. It is a statement true for all operational amplifier configurations. However, there is no need to immediately consign all our hard-won integrated circuits to the dust-bin.

Looking again at Table 1, it is clear that, for volt-size inputs, the voltage at  $x$  is large enough to swamp the transistor junction noise into insignificance. Also, the table implies that the 301A integrated circuit should be less noisy than the very high gain 725 type in the same amplifier configuration. Note that Table 1 shows only typical open loop gain values for each type. For a manufactured batch of any one type, the open loop gain  $G$  can vary over a 2:1 or even 3:1 range, while  $G$  also changes with operating temperature.

The problem is, not all input signals are volt-size. Many signals are only of the order of a few millivolts or less, eg from phono cartridges, tape heads, microphones etc. To amplify these signals, we need to move away from the simple operational amplifier concept towards special low-noise designs.

It is agreed amongst the sages of this science that, in a semiconductor junction, there are three different effects, each a source of noise:

- (a) Thermal noise, also called white or random noise;
- (b) Shot or generation/recombination noise; and
- (c) Flicker or  $1/f$  noise.

The sum of all three is the noise we hear. (Other sounds can also interfere with our wanted signal, such as mains frequency hum and switching transients. These external noise sources are treated separately).

### Thermal noise

Thermal noise is due to the random motion of charge carriers, usually electrons, in all conductors, resistors and semiconductors. Being a voltage proportional to the square root of bandwidth, we have little trouble with this effect for audio frequency work as long as we use good quality transistors and low resistance in the signal path. The high frequencies used for video signals are more of a problem. The noise voltage  $V(n)$  is actually equal to:

$V(n) = (4KTBR)^{1/2}$  where  $K$  is Boltzmann's constant,  $T$  is absolute temperature,  $B$  the bandwidth and  $R$  the series resistance.

### Low noise designs

The basic idea of low noise design is simple: provide some gain in a very quiet amplifier stage ahead of the operational amplifier. If the operational amplifier sees a relatively high-level signal, noise will not be a problem. In order to design such a "front end" low noise amplifier stage, let's first consider the sources of noise in transistor junctions.

TABLE 1		INTEGRATED CIRCUIT FAMILY TYPE	OPEN LOOP GAIN	VOLTAGE AT $x$ $V_{in} = 1V$ $V_{out} = 10V$	VOLTAGE AT $x$ $V_{in} = 1mV$ $V_{out} = 10mV$	VIRTUAL EARTH IMPEDANCE
$R_i$	$R_f$					
1k	10k	301A	30000	330 $\mu V$	0.3 $\mu V$	0.3 $\Omega$
1k	10k	725	1000000	10 $\mu V$	.01 $\mu V$	.01 $\Omega$
1M	10M	545	50000	200 $\mu V$	0.2 $\mu V$	200 $\Omega$




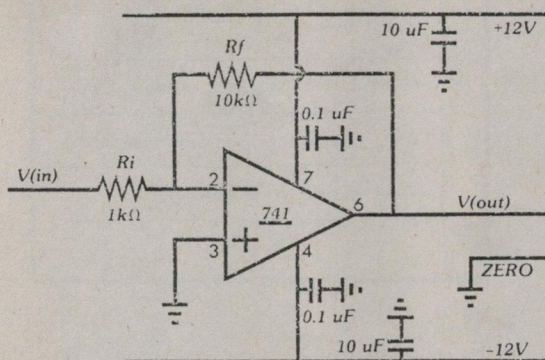


Fig. 1: basic operational amplifier circuit.

Fig. 2 (right): symbolic diagram of a common op amp IC showing the differential input stage. Ri is the input resistor, Rf the feedback resistor and 'x' the inverting input.

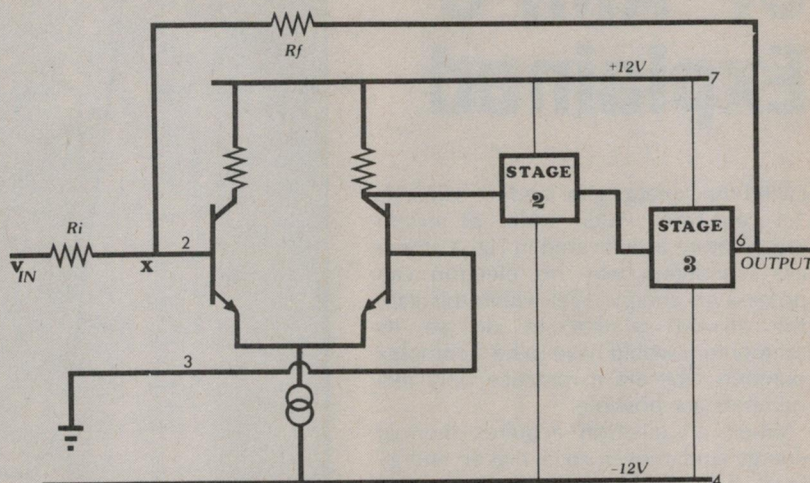

Incidentally, if resistors are used in series with the signal, they should be high-quality metal film or wirewound types. Never use carbon or composition types as these generate large amounts of noise due to their granular construction. In fact, experiments have shown that the "granular" noise generated by carbon composition resistors can be five times higher than the theoretical random noise of the same value resistor.


## Shot noise

The generation of electron-hole pairs in a semiconductor, and their subsequent erratic recombination, is a second source of transistor noise, indeed the predominant one. To understand these effects, let's consider just what happens inside a semiconductor. Essentially, two separate actions occur simultaneously due to what are called the intrinsic and extrinsic properties of the semiconductor material.

The intrinsic properties of a semiconductor describe what goes on inside a pure crystal of semiconductor material, for example silicon, simply because the temperature is greater than absolute zero. In order to measure the intrinsic properties, it is imperative that the material be super-refined to no more than one impurity atom for every million million silicon atoms. Such super-pure silicon, in single-crystal, form exhibits the following true semiconductor properties:

- the conductivity is zero at absolute zero temperature because of the absence of charge carriers; and
- the conductivity increases as temperature increases due to the increase in the number of charge carriers.

The reason for this relation between the number of charge carriers and temperature is that, at absolute zero temperature, all electrons are busy

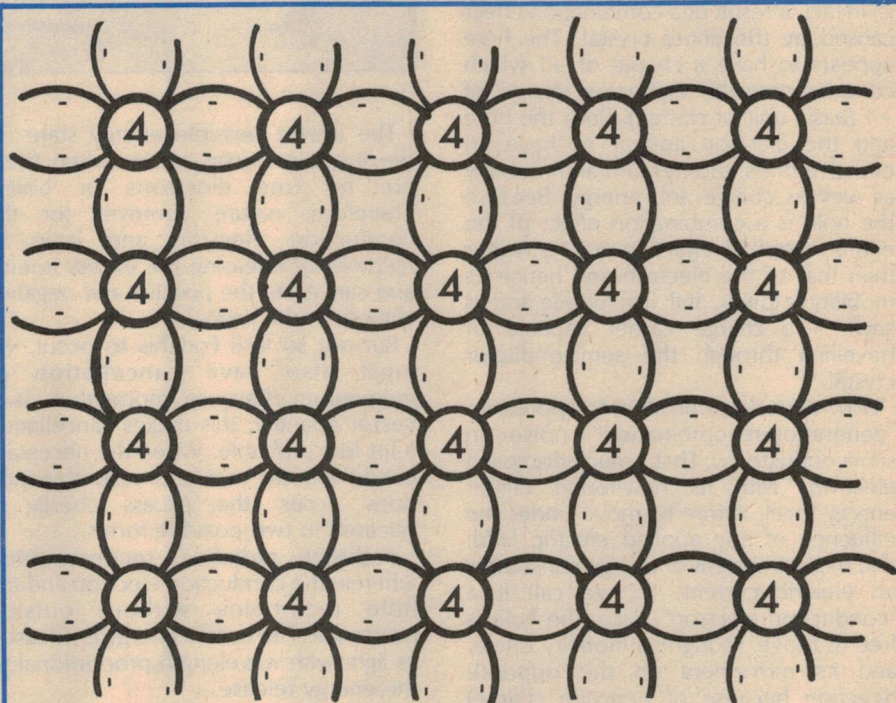

Although not strictly correct, this diagram serves as a useful model for understanding electron pair bonding in a crystal structure. The circles represent an atomic core having a charge of +4, while the minus signs indicate the positions of the valence electrons.

forming valence bonds, the structural ties which hold the solid material together as in Fig. 3. These valence bonds are essential, as they lock atoms together into the crystal shape.

The electrons have energy levels in a range known as the "valence band of energy levels". Such electrons are improperly called "valence electrons", an expression used by everyone (including your author), though it is strictly wrong because you cannot put name tags on individual electrons. At temperatures above absolute zero only a few electrons absorb thermal energy, the rest absorbing nothing.

Those that do absorb energy find it

impossible to absorb just a little bit; instead they find they have to absorb a lot of energy or nothing at all. Having absorbed this energy, such electrons now find that they are able to break away from valence bond duty and wander off through the crystal. Their energy level can be anywhere within a range of energies called the "conduction band of energies".

The reason why they have to absorb a lot of energy to get into such a condition is that between the valence band of energies and the conduction band of energies is a great void, a range of energies which are not available to any electron. This void in the energy levels is



# OP AMPS Explained

called the "energy gap" and for silicon is 1.1 electron volts wide at room temperature as indicated in Fig. 4. If you are wondering why no electron can possess an energy level within this gap, the answer is that to do so its momentum would have to be a complex number, whereas in practice only real numbers are possible.


When an electron acquires thermal energy and moves to a higher energy level, it leaves behind one unoccupied energy level. This we call a "hole" which is, in fact, a result of a combination effect caused by the entire crystal. The hole appears to have a charge of +1 which complements the electron's charge of -1 (basic unit of charge). Both the hole and the electron appear to have an effective mass, momentum and mobility as well as charge and energy. Because the hole is a combination effect of the entire crystal, its effective mass is higher than that of the electron and hence its mobility is lower. Still, it is mobile and as such is a charge carrier capable of travelling through the semiconductor crystal.

Now we are in a position to appreciate "generation-recombination" noise in semiconductors. That much-discussed electron, with its new-found higher energy level, is free to move under the influence of any applied electric field, and this movement of charge constitutes an electric current. So we call it a "conduction electron". Also, the hole is free to move, though its mobility is less, and its movement (in the opposite direction because of opposite charge) also constitutes an electric current.

## Leakage current

The sum of these two components is the leakage current or "saturation current" we observe in semiconductor diodes and transistors. Such leakage current is embarrassing in many aspects of circuit design and is one reason why silicon took over from germanium in the search for better semiconductor materials as it has less leakage current. The story we have just told is called "electron-hole pair" generation.

But worse is yet to come! You see, nature is "energy lazy" and always likes things to be in a state of lowest possible energy. That infamous "conduction electron", however, is in an elevated energy state, as is the hole. So the system is not in equilibrium.

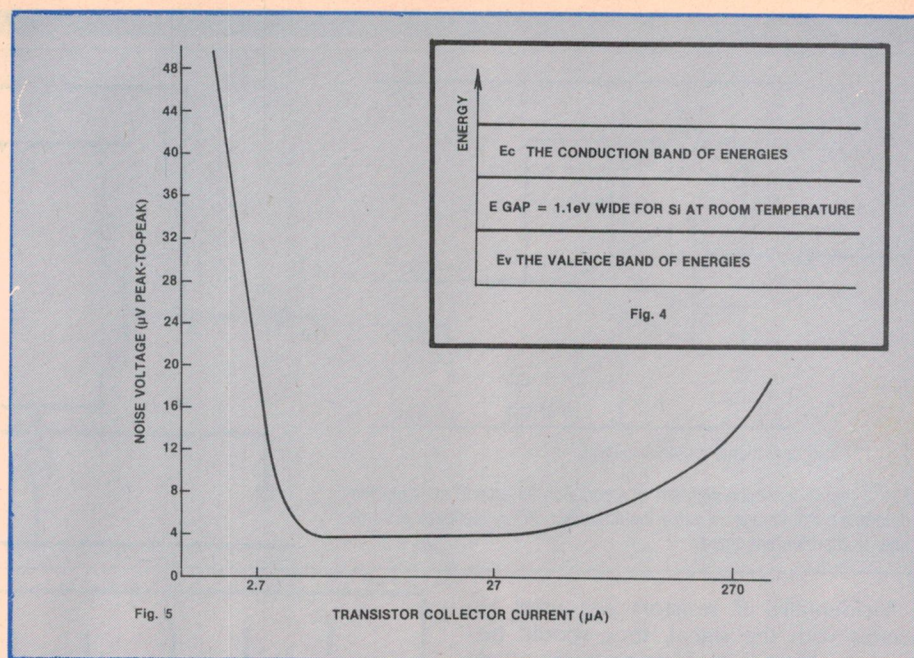

The lowest possible energy state for the intrinsic crystal occurs when there are no free electrons or holes. Therefore, nature contrives for the conduction electron and hole to recombine, releasing the excess energy and cancelling the positive and negative charges in the process.

But not so fast! For this to occur, we must also have cancellation of momentum. Because momentum is a vector quantity, this makes cancellation a lot less probable. When the necessary conditions are met and recombination does occur, the excess energy is released in two possible forms:

- direct radiative recombination wherein the conduction electron and the hole recombine without outside assistance. The excess energy is released as light with wavelength proportional to the energy release.

- trapping site recombinations in which the conduction electron and the hole use an intermediary energy level associated with either an impurity atom or a crystal imperfection.

William Shockley, soon after inventing the transistor, realised that direct radiative recombination was almost insignificant compared to the more numerous trapping site recombinations, the traps being energy states due to impurities or crystal dislocations. Such energy states usually lie deep in the energy gap.

Recombinations also produce a small voltage signal in the semiconductor. Because many recombinations go on every second in a semiconductor, apparently arbitrarily, the voltage signals so generated appear as a never-ending string of pulses of random amplitude, randomly spaced in time. This we call

"shot" or "popcorn" noise. The fact that it is by far the largest source of noise forces us to consider it seriously.

Transistors, as you know, are made of "doped" semiconductor material, ie silicon to which other elements such as aluminium, gallium, indium, arsenic phosphorus or antimony have been deliberately added. Such doping does marvellous things to the energy gap and makes transistor action possible, thus giving rise to the "extrinsic" properties. But still the intrinsic generation-recombination noise phenomena persists in all transistors to plague us.

## Design precautions

For the integrated circuit and transistor designer, minimisation of generation-recombination noise means a reduction in the number of trap sites present. A reduction in the impurity content (eg of elements such as copper) and a reduction in the number of crystal imperfections both help in this regard. The former requires better silicon purification before doping. The latter demands greater care in manufacture and subsequent handling to minimise crystal dislocations, as well as careful design of the crystal slice shape.

In addition, it has been found that high current gain goes hand-in-hand with low noise. This is not surprising as the small base volume associated with a high gain transistor provides less opportunity for recombinations.

For the circuit designer, shot noise reduction involves choosing low-noise integrated circuits and transistors; high  $h_{FE}$ ; choice of optimum collector current; and minimisation of the number of semiconductor junctions present. This latter statement outlaws Darlingtons,




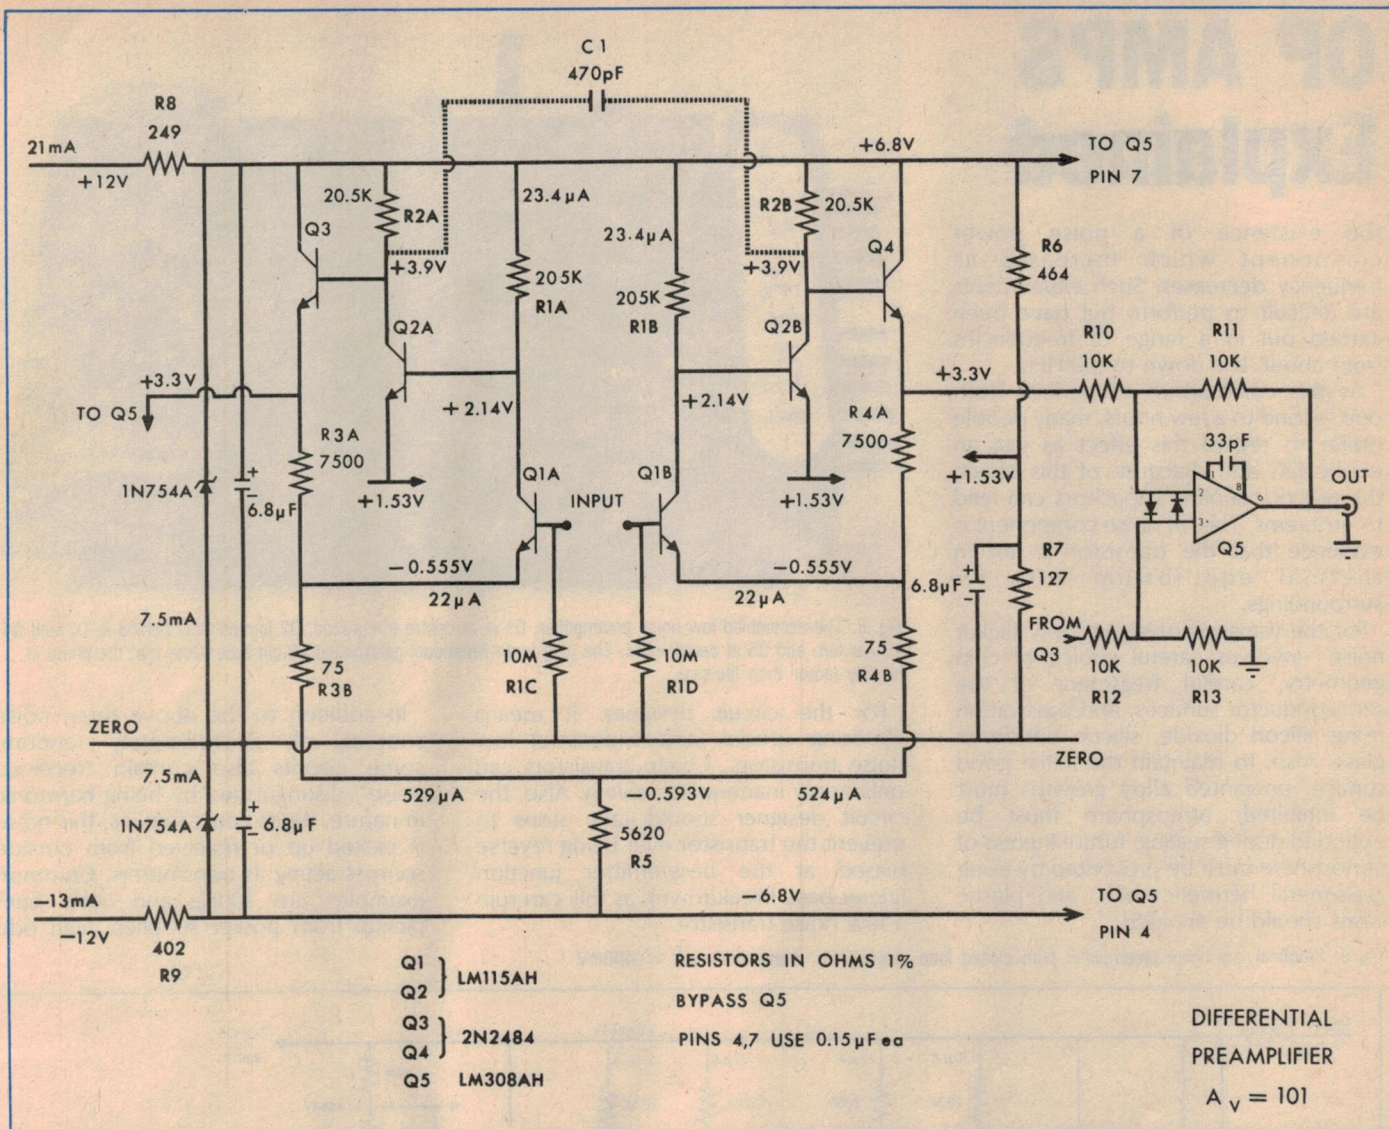


Fig. 6: Practical low noise preamplifier with closed loop gain = 101. Low noise results from moderate open loop gain (9000), avoiding the very small "voltage at x" problem.

super-beta transistors and active "tail" circuits. As field effect transistors are in general noisier than bipolar junction transistors, FET's should be avoided if at all possible. To prevent extra noise being generated because of a drop in  $h_{FE}$  at high frequencies, the circuit designer should start with transistors capable of high  $h_{FE}$  at frequencies much higher than the intended passband.

### Flicker noise

Sometimes also referred to as "excess noise", flicker or  $1/f$  noise is a surface phenomenon caused by the random trapping of charge carriers in fast surface energy states. Recall what we said about crystal imperfections or "faults" as trapping sites. Well, imperfections are also created in the surface of the crystal simply by using a saw to cut the crystal into slices. Experiments have established

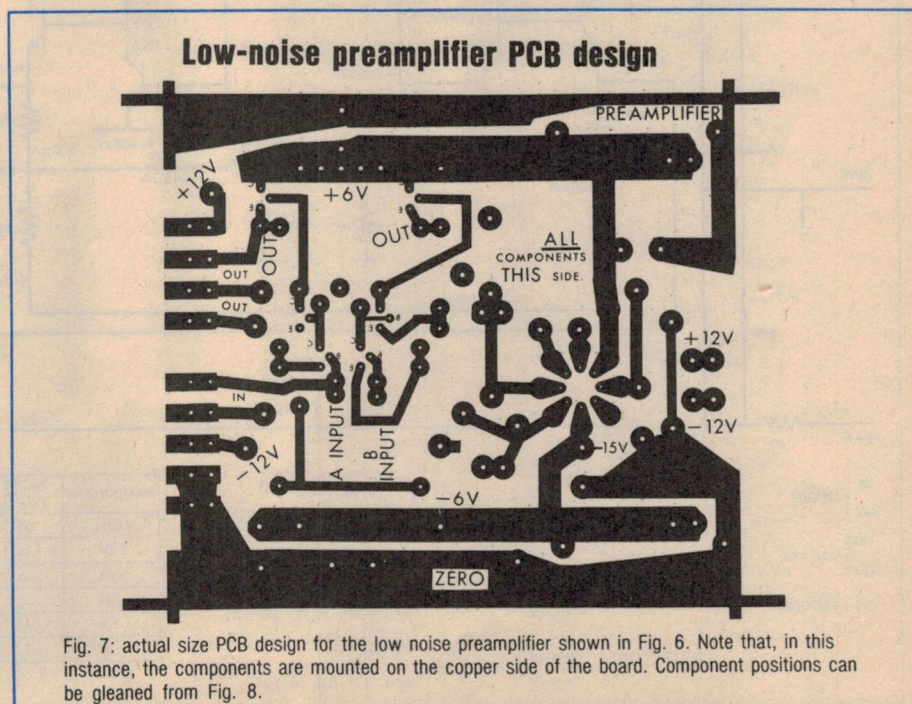



# OP AMPS Explained

the existence of a noise power component which increases as frequency decreases. Such experiments are difficult to perform but have been carried out in a range of frequencies from about 1Hz down to .0001Hz.

As this corresponds to periods from one second to a few hours, many people prefer to regard this effect as just an erratic DC drift. Because of this effect, the use of coupling capacitors can lead to problems. This  $1/f$  noise component is evidence that the transistor is not in thermal equilibrium with its surroundings.

For the transistor designer, low flicker noise involves careful choice of chip geometry, careful treatment of the semiconductor surfaces, and passivation using silicon dioxide, silicon nitride or glass. Also, to maintain the initial good surface, unwanted alloy growths must be inhibited; atmosphere must be excluded during sealing, future ingress of atmosphere must be prevented by using glass-metal hermetic seals, and plastic cases should be avoided.

Fig 9: Practical low noise preamplifier with closed loop gain = 11. Maximum input = 400mV


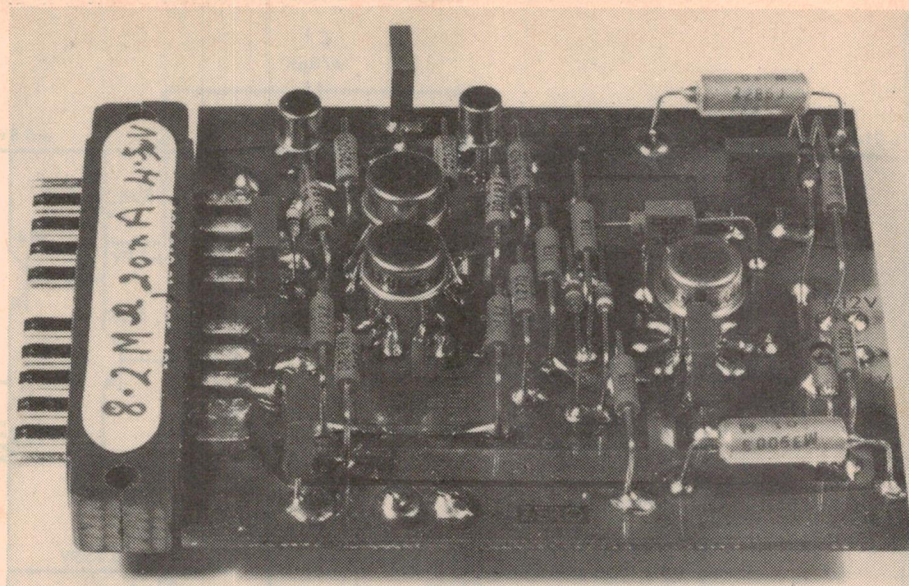


Fig. 8: The assembled low noise preamplifier. Q1 is at centre foreground, Q2 immediately behind it, Q3 and Q4 at rear left, and Q5 at centre right. The plug is an Amphenol gold plated 10-pin type. Note that the photo is slightly larger than life-size.

For the circuit designer, it means choosing special (and expensive) low noise transistors. Cheap transistors can only imply inadequate sealing. Also, the circuit designer should take steps to prevent the transistor ever being reverse biased at the base-emitter junction (zener base breakdown), as this can ruin a low noise transistor.

In addition to the above three noise sources, all approximately random, some circuits also contain "received noise", distinguished by being harmonic in nature. As its name implies, this noise is picked up or received from outside sources acting as transmitters. Common examples are 100Hz and 50Hz hum pickup from power supplies; high odd



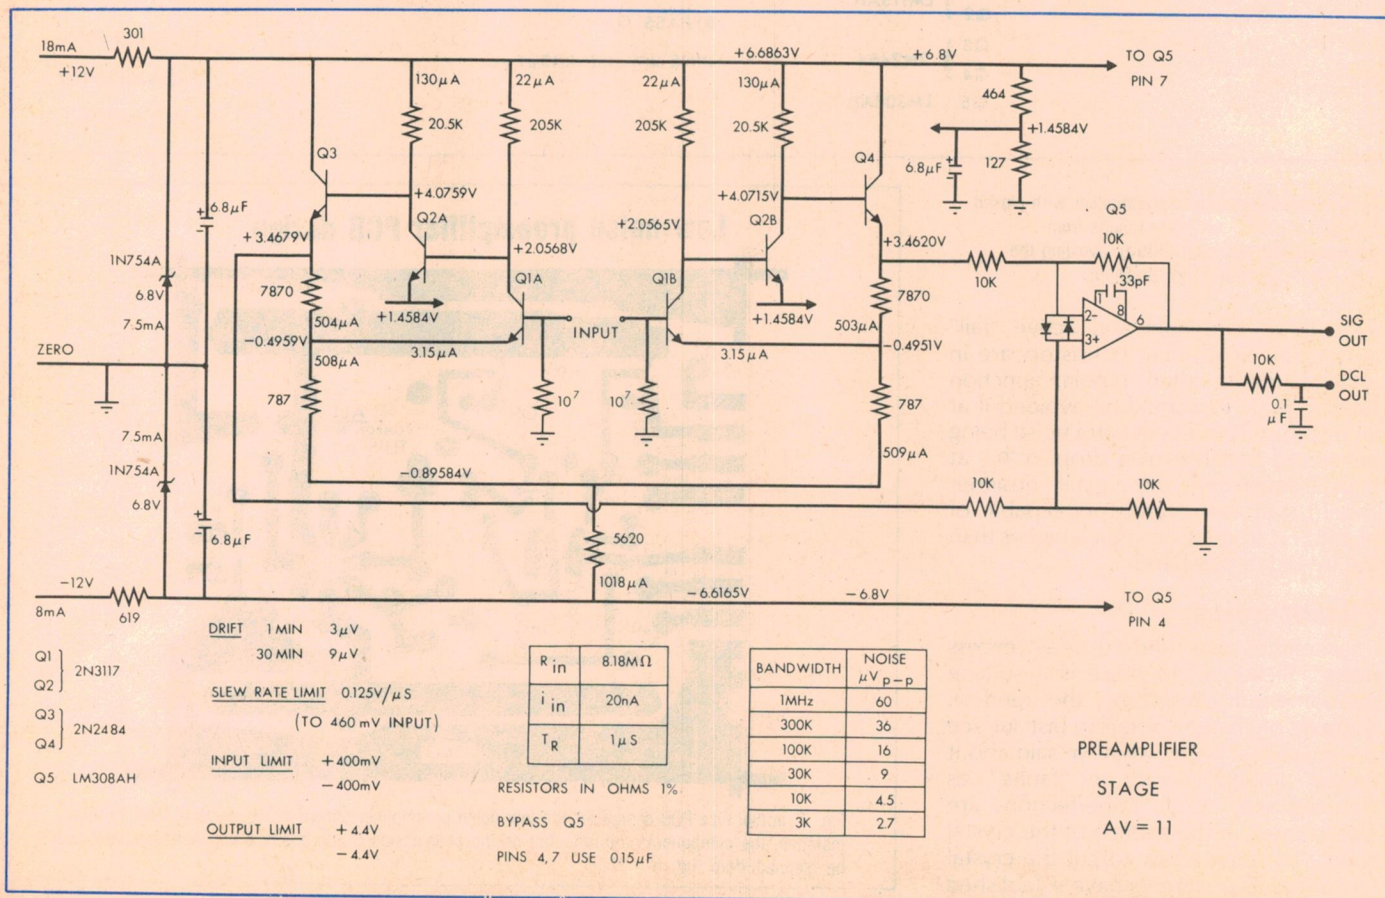

# For champion performance from compact discs, look to the audio giants.

Totally faithful sound reproduction is no longer out of reach. Thanks to Sanyo's compact disc technology, a quantum leap into the future of audio enjoyment.

Ask to hear a demonstration of Sanyo's CP 300 Compact Disc Player. The sound quality you'll experience from the 12cm, up to an hour-long, one-sided compact disc is identical to that of the original digital master tape.

Examine the unit carefully. You'll find winning features like horizontal slide loading system; soft-push microcomputer controls; 16-selection programmable auto-search system; and synchronous recording to name a few.

Already, this digital audio technology using laser optics is transforming the audiophile's world, with the kind of champion performance from compact discs that only the audio giants can deliver.

But with Sanyo, that's life.



CP 300



**SANYO**  
*That's Life!*



ACCENT	LOW NOISE FET
$R_{in}$	$\approx 5.10^{10} \Omega$ (WITHOUT $R_{1C}, R_{1D}$ )
$i_{in}$	$5.10^{-13} A$
$T_R$	$1 \mu S$

BANDWIDTH	NOISE VOLTAGE (MICROVOLTS PEAK TO PEAK)
DC-1MHz	50
300KHz	30
100KHz	20
30KHz	15
10KHz	6
3KHz	4

TIME PERIOD	D C DRIFT
1 MIN	$\pm 1 \mu V$
30 MIN	$+5 \mu V$
3 HRS	$+15 \mu V$

$A_0 = 2040$

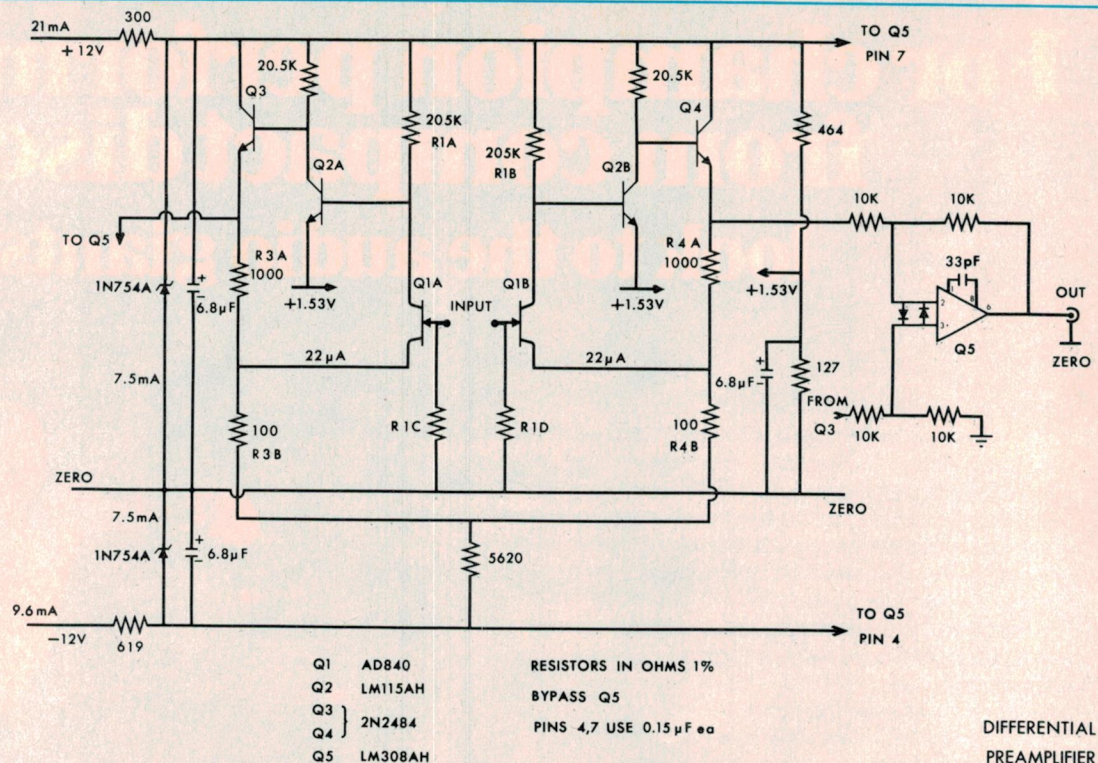


Fig. 10: FET low noise preamplifier with closed loop gain = 11.  $R_{in} = 50,000M\Omega$ ,  $i_{in} = 0.5pA$ .

## OP AMPS Explained

harmonics picked up from 50Hz TV vertical deflection circuits; and bursts of noise from switch openings and closings.

The cure for these noise effects is obvious: better power supply design, decoupling, shielding and separation. Attempts to remove 50Hz interference by means of notch filters often fail as the radiated interference also contains a collection of higher harmonics.

Under some conditions much of the received hum, especially the 50Hz component, can be removed by the use of differential amplifiers having high common mode rejection. This is a subject which we will treat in a future part of this series. For the moment, we observe that all our integrated circuits are actually differential amplifiers, but we commonly implement them into single sided (non-differential) closed loop amplifiers.

### The low noise design

From the foregoing, we see that our low noise amplifier should be designed along the following lines:

- All efforts should be concentrated on the first stage which will have a

closed loop gain of about 100. After such gain, noise will not be a problem in most applications.

- The front end should be a feedback amplifier for linearity, but should only have moderate open loop gain so that the infamous "voltage at x" will not be too small.

- We construct our own amplifier for the first stage rather than use an integrated circuit.

- The front end should use bipolar junction transistors having wide bandwidth, high  $h_{FE}$  and the lowest possible noise figure; wire wound or metal film resistors; decoupled power supplies; and no coupling capacitors.

- As every junction contributes noise, the number of transistors used before gain should be kept to a minimum. Therefore we forbid active load and active tail circuits, super beta transistors and Darlington pairs.

- Tests should establish the optimum collector current.

- The input impedance should be adequate for normal requirements.

### Suitable transistors

From data books, we observe that, for single NPN transistors, the 2N3117 has a very small noise figure (1dB under some conditions), with the 2N2484 and SE4010 running a close second. Amongst the dual NPN transistors, the LM114AH, LM115AH, 2N2920, LM194 and LM394 are some of the quietest. Tests were

conducted to establish the collector current range for the lowest noise. The results, plotted in Fig. 5, show a low noise plateau in the curve for collector currents in the range 3 to 30 microamps. Other characteristics are also satisfactory in this range. For example, the LM114AH has  $h_{FE} = 500$  minimum and  $f_T = 22MHz$  at 10 microamps.

A practical low-noise amplifier design is shown in Fig. 6 and uses LM115AH transistor input stages operating at 23 microamps collector current. The circuit can be broken down into two sections, the first consisting of a six transistor differential negative feedback amplifier (Q1A, Q1B, Q2A, Q2B, Q3 and Q4) with an open loop gain of 9000, a closed gain of 101 and differential output. This is followed by Q5, a differential unity gain operational amplifier.

Input is applied to the Q1A and Q1B bases, the input impedance and current being  $8.2M\Omega$  and 20 nanoamps respectively. Q1A and Q1B form a long tail pair with R5 the tail resistor. R3A, R3B, R4A and R4B form voltage dividers from the emitters of Q3 and Q4 to provide differential negative feedback to the emitters of Q1A and Q1B. The closed loop gain of the six transistor first stage is equal to  $1 + (R3A/R3B) = 101$ . This emitter feedback raises the input impedance at the bases of Q1A and Q1B and widens the bandwidth of the six transistor stage to 500kHz, which can be reduced if you like by the addition of



optional C1.

Q5 resolves the differential outputs from Q3 and Q4 into a single output. Because the signal is raised by a factor of 101 before being presented to Q5, the noise of this operational amplifier is much smaller by comparison, and hence unnoticeable.

The preamplifier responds linearly to input signals up to 43 millivolts, and has excellent DC stability and low drift. The latter is a result of a symmetrical circuit arrangement, dual transistors Q1 and Q2, small transistor heating (23 microamps collector current) and the use of 1% metal film resistors throughout. The back-to-back diodes across the input to Q5 prevent heating of the latter's input transistors in case of accidental signal imbalance, such as occurs in overdrive or power switch-on surges.

## Stray capacitance

To ensure small stray capacitances, the amplifier should be constructed on a small PC board as shown in Fig. 7. If a plug and socket are used, gold contact surfaces are absolutely essential.

There is, of course, no reason why the operational amplifier stage Q5 could not have gain higher than unity. This would simply involve changing R11 and R13 from 10kΩ to some higher value, with a corresponding reduction in the 33pF compensation capacitor on pins 1 and 8. This increase in gain should not be taken too far, otherwise instability may result. If your application demands a circuit suitable for higher input voltages, a change may be made in the feedback ratio R3A/R3B, R4A/R4B. For example 7870 ohms/787 ohms will result in a first stage closed loop gain of 11, as in Fig. 9, with the ability to respond linearly to inputs up to 400 millivolts.

Measured noise in both cases is 700 nanovolts RMS, ie 4 microvolts peak to peak, from DC to 10kHz, referred to the input. If the 8MΩ input impedance is not high enough or the 20 nanoamp input current is not low enough for some applications, two courses of action may be taken. First, Q1's collector current may be reduced to 4 microamps by raising R1A and R1B to 1MΩ. If R1C and R1D are now removed, the preamplifier will have an input impedance of 100MΩ and an input current of 4.0 nanoamps, with no noticeable change in noise.

The alternative is to substitute a low noise dual field effect transistor for Q1 with minor circuit changes as in Fig. 10. The dual FET type AD840 was chosen for this role. With R1C and R1D removed, the input impedance measured 50,000MΩ with an input current of 0.5 picoamps. Noise is about double the previous example, or 1.2 microvolts RMS (6.0 microvolts peak to peak), from DC to 10kHz.

The dual transistors and FETs specified are excellent units and well worth their higher price. But your poor

impoverished author thought he would define a new unit to be called the "noise microvolt-dollar product", which should be kept to a minimum. Accordingly, the circuit Fig. 6 was rebuilt using six SE4010 transistors, while R1C and R1D were changed to 1MΩ. All other components remained the same, except that no plug-socket was used.

The result was a preamplifier of much lower cost, but with noise almost the same: 700 nanovolts RMS or 4 microvolts peak to peak (referred to input) from DC to 10kHz. Input impedance with R1C and R1D measured approximately 1MΩ and the input current 0.1 microamps. Because the transistors are not pairs, DC drift was much higher but this was reduced by sliding tygon tubing over pairs of transistors and pumping the tubing full of Dow-Corning DC4 silicone grease for thermal coupling. Readers who are still awake will find a summary of these preamplifier variations in Table 2.

Next month, we will consider the implications of DC coupling, high gain and drift.

PREAMPLIFIER	Fig.	NOISE (0-10kHz) P-P μV	RMS μV	* Rin Ω	iin A	Cin pF	† BANDWIDTH Hz	† OPEN LOOP GAIN Ao	CLOSED LOOP GAIN Av	Vin MAX ±mV	Vout MAX ±V	DRIFT RATE μV/hr
BASIC Q1 = 2N2920 (ic = 4μA, R1A,B = 1M)	9	4	0.7	10 <sup>8</sup>	4.10 <sup>-8</sup>	20	100000	6000	11	300	3.3	20
BASIC Q1 = 2x2N3117	6	3.8	0.7	8.10 <sup>7</sup>	2.10 <sup>-8</sup>	20	500000	9000	100	38	3.8	300
BASIC Q1 = 2xSE4010	6	4	0.7	10 <sup>8</sup>	10 <sup>-7</sup>	20	300000	4000	100	38	3.8	90
BASIC Q1 = 2N2920, LM114AH	6	4	0.7	8.10 <sup>7</sup>	2.10 <sup>-8</sup>	20	500000	9000	100	38	3.8	6
FET Q1 = AD840	10	6	1.2	5.10 <sup>13</sup>	5.10 <sup>-13</sup>	20	500000	2040	11	120	1.32	6
FET Q1 = AD840 (16V VERSION)	10	6	1.2	5.10 <sup>13</sup>	4.10 <sup>-13</sup>	20	500000	4000	10.1	500	5	6

TABLE 2


\* R1C,R1D DELETED

† SIX TRANSISTOR SECTION, FROM LOW IMPEDANCE

Table 2: summary of preamplifier performance variations for different transistors.

## AN INTRODUCTION TO

# DIGITAL ELECTRONICS

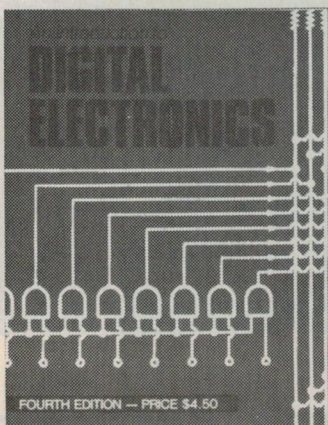

Electronic equipment now plays an important role in almost every field of human endeavour. And every day, more and more electronic equipment is "going digital". Even professional engineers and technicians find it hard to keep pace. In order to understand new developments, you need a good grounding in basic digital concepts, and An Introduction to Digital Electronics can give you that grounding. Tens of thousands of people — engineers, technicians, students and hobbyists — have used the previous editions of this book to find out what the digital revolution is all about. The fourth edition has been updated and expanded, to make it of even greater value.

Available from "Electronics Australia", 57 Regent St, Chippendale, Sydney, 2008. **PRICE \$4.50** OR by mail order: Send Money Order or Cheque to "Electronics Australia", PO Box 163, Chippendale 2008. **PRICE \$5.40.**



# ***Will your***


Studying a degree course doesn't automatically lead to professional employment. Except with the Royal Australian Air Force. You can undertake a Science degree while securing a future. If you have matriculated or are currently undertaking your matriculation, are an Australian citizen or eligible to apply for Australian citizenship, are under 20 on the 1st February of your intended year of entry and are able to meet our selection requirements you will be offered a career that will lead you to becoming an Officer and a Pilot. Studying at the RAAF Academy as well as the new Australian Defence Force Academy.

With the military training that will stand you apart from other students. And you will receive excellent pay while you study. So don't be left wondering what to do with your degree. Join Australia's Air Force and get your career off to a flying start.

# ***Are you good***



# *degree end up in the air?*

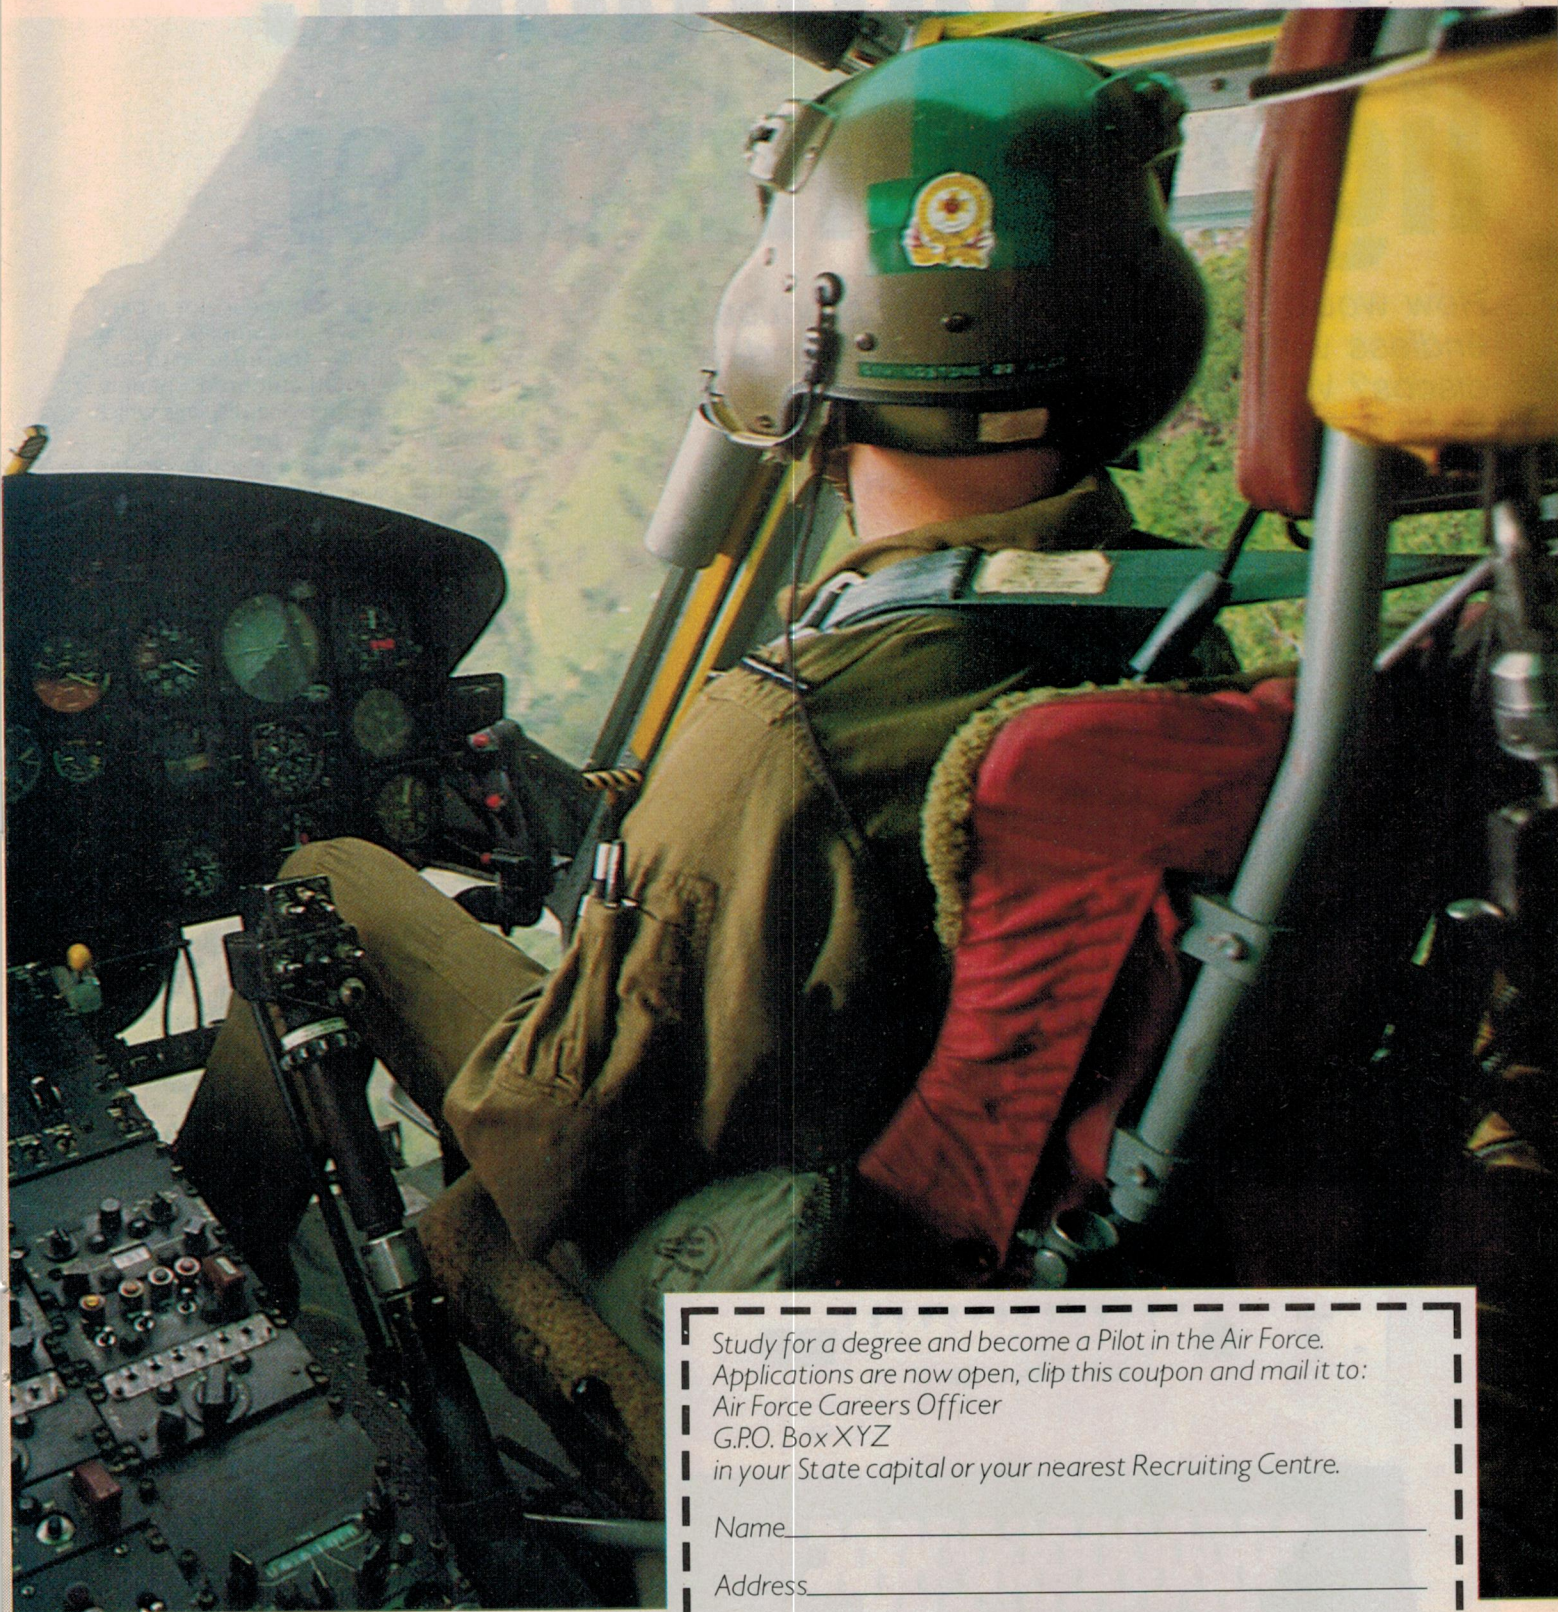

# *enough?*

Study for a degree and become a Pilot in the Air Force.  
Applications are now open, clip this coupon and mail it to:  
Air Force Careers Officer  
G.P.O. Box XYZ  
in your State capital or your nearest Recruiting Centre.

Name

Address

Postcode

Birthdate

Authorised by the Director General of Recruiting, Department of Defence.

AFA 70. DPS. 123





# Programmable light controller

*How would you like to be able to produce an endless variety of light patterns for bands and discos? With a personal computer and our new lighting controller you can do just that.*

by PETER VERNON and COLIN DAWSON



These days it is "de rigeur" for a band or disco to have a complex lighting system. Lights include strobes, mirrorballs, multi-coloured panels, ribbon lights and moving displays which are usually driven by chasers.

Chasers are okay as far as they go but the limited patterns they produce soon become boring. What you want is a programmable light controller which can vary the patterns of lights it is driving. But such controllers are quite expensive and probably out of the reach of all but the most well-heeled band.

An alternative approach is to produce a very simple light controller which can drive quite a few channels but is controlled by a personal computer. This is what we have done. Our light controller will drive up to 14 channels, any of which may consist of up to 1000 watts of incandescent lamps. Naturally the total lamp load which can be driven by the unit is limited by normal mains GPOs (general purpose outlets) to 2400W but we will talk more about that later.

To use this light controller with any computer requires just one 8-bit parallel output port. There are no address lines to be decoded, special purpose strobe signals or other control lines. The Centronics printer port of an office computer can be used, or the outputs of a PIA (Peripheral Interface Adapter) on computers such as the single-board DATUM project.

Interfacing to the computer requires no special measures and the mains circuitry of the light controller is completely isolated from the computer's output port. The lights are controlled by Triacs which are triggered by zero-voltage switching devices which assures that the lighting circuitry produces negligible electromagnetic interference (EMI).

Programming the computer and thus the light show is simplicity itself. It's all done in Basic which is executed quickly enough to produce a very rapidly changing display if that is what is required.

## How it works

Have a look at the circuit. There is









## Programmable light controller

A D-type flipflop is also referred to as a latch because it effectively stores whatever logic level is at its D input when the clock pulse arrives and holds it there until the next clock pulse.

Now back to the 74175. The configuration of this device is just four D-flipflops with common clock and clear (reset) inputs.

Information at the four data inputs of the 74175 is transferred to the outputs on the positive-going edge of the clock pulse, that is, on the transition of the clock signal from 0 to 1. When the clock input is at a static 1 or 0 level the input data signal has no effect on the output so the previous data is held latched regardless of the state of the inputs.

As shown by the circuit diagram of the light controller, the seven data lines are connected to the inputs of both sets of flipflops, while the most significant bit, D7, selects one of the two sets of flipflops to latch the data. Data bit D7 is connected directly to the clock inputs of the lower set of flipflops (IC1 and IC2) and also via a single transistor inverter to

the clock inputs of the second set (IC3 and IC4).

To summarise, when D7 goes from "0" to "1", the remaining data bits D0 to D6 are clocked into the "low byte" set of flipflops. When D7 goes from "1" to "0" and is inverted by Q1, D0-D6 are clocked into the second set of flipflops, the "high byte". In each case the other set of flipflops is unaffected.

Note that when information is sent in two consecutive operations to both "low" and "high byte" sets of flipflops it is only necessary to ensure that D7 is first reset to "0", the data placed on lines D0-D6 and then D7 set to "1". Data for the high byte is then placed on D0-D6 and D7 is reset to "0" to clock the second set of flipflops via Q1.

Manipulating the two sets of flipflops independently is a bit more complex but follows the same principle. Writing programs for the interface requires a constant awareness of the state of bit D7 and the transition required to clock one or other set of flipflops, but listings provided here for the System-80 and MicroBee computers take care of this detail automatically and provide a convenient way to program lighting displays.

As noted above, the 74175 quad flipflop also has a "clear" input which

when taken to "0" resets all the normal outputs of the flipflop and takes the complementary outputs to "1". The mains control side of the interface is arranged so that this condition switches all lighting channels "off". With the addition of one resistor and a momentary contact normally open pushbutton switch, the clear input provides an "instant off" feature which may be useful in some installations.

### The mains control circuitry

There are two major considerations in the design of any interface to allow a computer to control 240VAC appliances. Firstly the computer circuitry must be isolated from the mains power, and secondly, some consideration must be given to the problem of radio frequency interference generated when the mains power is switched on and off.

Fortunately there is a way around both problems. The Motorola MOC3041 Triac driver consists of a gallium arsenide infrared emitting diode and a photodetector separated by a transparent dielectric. Infrared pulses from the emitter are coupled through the dielectric but there is no electrical path between the two components of the Triac driver.


The MOC3041 also incorporates a "zero crossing switch" which detects the point at which the mains voltage waveform is at the zero point. Radiated interference is eliminated by turning the Triac on only at this point, rather than when a substantial AC voltage is present.

It should be noted that this arrangement will only function correctly when the Triacs are switching loads that are substantially resistive — such as incandescent lamps. The zero crossing feature is such that the voltage and current waveform through the detector must be in phase. Reactive loads (such as motors) change this phase relationship and interfere with the operation of the Triac drivers. This also prohibits the use of fluorescent lights as the ballast will introduce a phase difference.

*Below: view inside the prototype showing the PCB and the rear panel 240VAC wiring. Note that all wiring to the sockets should pass through rubber grommets.*





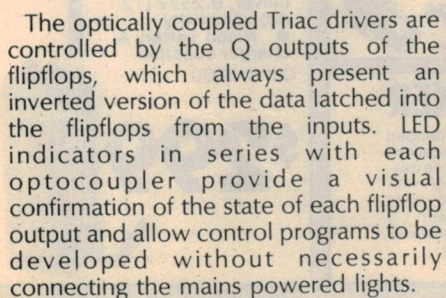

The Triacs specified for the Light Controller are SC141D types which can handle an incandescent lamp load of up to 1000 watts. (Note that the individual lamps should not be rated above 100W

As a practical example, if you decided to have a maximum of eight channels (out of a possible 14) then each channel



# We're No.

## CAT System All-mode FT-757 GX Transceiver

Here's the one you've been waiting for. And waiting! They've been so incredibly popular we've hardly been able to keep up with the demand! As Amateur Radio Action said in their January 1984 issue "Without modesty the best transceiver of 1983".

Have a look at one and you'll see why its tiny (just 238 x 238 x 93mm!) but packs a 100W continuous

output with its internal forced air cooling. Continuous coverage receive, all WARC bands, ALL MODE, (yes, FM is included, not an option) PLUS 8 memories, twin VFO's, computer aided if you wish. ... its features are simply far too many to list here. Check out the ARA review above if you don't believe us (copies available on request).

Cat D-2940

### Specifications:

- All mode, All HF band (inc. 160m)
- 100W continuous (SSB/CW/FM) output.
- Twin VFO's & 8 memories, with full transfer & switching.
- Triple conversion receiver, 0.5 - 30MHz.
- 0.25uV sensitivity 1.5 - 30MHz SSB.



# \$1075

\*Computer Aided Transceiver

*Hurry! Stocks are limited!*


## RS-232C INTERFACE

Use your own micro to control the VFO frequency, memory functions etc. Just plug it in - it's exceptional!  
Cat D-2943



# \$99

LATEST COMPUTER TECHNOLOGY!



## ANTENNA COUPLER

Wow! Uses its own micro to automatically work out which band you're on and tune the antenna to it! Yes, it's even possible to pre-tune on receive while you're on another band! This is one piece of gear that's absolutely amazing: see it to believe it.  
Cat D-2942

It's fully automatic!

# \$399

*Turn your FT-757 into a Base Station!*



**Switch Mode:** Very small, fits underneath transceiver and you'd hardly know it was there! Fully regulated, up to 50% duty cycle.  
Cat D-2941

**Heavy Duty:** For the full 100% duty cycle. It's capable of all the oomph you need, includes large speaker too.  
Cat D-2945

# \$299



## UHF Helical Filters




Just arrived! Miniature low impedance bandpass filters, specifically made for either the UHF amateur band (centre 440MHz L-1850) or the UHF CB band (centre 447MHz L-1860).

Bandwidth: 12MHz min (at -1dB) Selectivity: 12dB min (F0/-30MHz) Insertion Loss: 3dB max Impedance: 50 ohms in and out

# \$750

10 up \$6.75



## SP55 MINI SPEAKER

Elegantly styled speaker from Yaesu intended especially for use as an extension communications speaker for transceivers, scanners, etc in mobile use. Measuring just 110 x 65 x 50mm (75mm high with mounting bracket supplied), and rated at 5 watts maximum, this 4 ohm unit comes complete with 1 1/2 metres of cable fitted with 3.5mm plug. And because it comes for Yaesu, you know it's top quality.  
Cat D-2913

# \$29.95

## YH-2 Headset Speaker Mic

For complete hands-free operation - even has VOX system (with FT-230!) One piece headset for driving safety, boom mic.  
Cat C-4200

# \$29

## MH12A2B External Speaker Mic

For mobile or desk operation. Plugs directly into FT203R, can use external PTT.  
Cat C-1112

# \$39

## BNC Line Plug

Suitable for RG58RU cable Cat P-2210

1-9 \$1.95

10 up \$1.80

## BNC Panel Socket

Accepts P-2210

Cat P-2220

1-9 \$1.95

10 up \$1.80




## ECONOMY 2m HAND - HELD FT-230R

Yaesu's new compact & lightweight handy for the amateur who doesn't need all the frills; the brilliant new FT-203. Thumbwheel frequency switching makes for quick and easy channel selection - so no memories are required. But the FT-203 still packs a handy 2.5W output - more than enough for average simplex & repeater (inbuilt +/-600kHz repeater split) usage. And for mobile use the FT-203 has no-hands VOX system when used with the optional YH-2 headset. Safe driving - and more enjoyable QSO's.

- 450mAh battery included
- 144-148MHz frequency range
- 5W input for 2.5W output (F3)
- Tiny size - 65 x 34 x 153mm - and only 450g including battery!
- Double conversion superhet receiver, 0.25uV (12dB) sensitivity
- Nicad battery & charger supplied.

Cat D-3500

# \$299

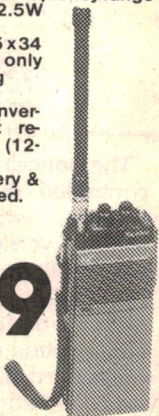



# for Amateur Radio

**NO LEAK! RECHARGEABLE! INCREDIBLE!**

## 12V 2.6Ah Gel Cell

This superb new edition to our range gives you all the advantages of conventional lead-acid batteries without the fuss. Rated at 12 volts and 2.6Ah, it is intended for trickle charge circuits where it is always kept topped up for use. Fits perfectly in our new L-5100 Security Centre case. Measures just 135 x 95 x 53mm (W x H x D); fitted with quick-connect terminals. Cat S-3320



**\$24<sup>95</sup>**

## VHF-UHF All mode TRIBANDER FT726R

Now that so many satellites are going up, we're constantly asked for a true satellite transceiver. Here it is; and what a transceiver. You choose the plug-in modules for the bands you want to use - two additional bands can be installed along with the 2 metre module supplied. Plus a satellite IF unit can be installed giving full duplex crossbanding with independent tuning, mode selection and metering for the band in use! Just add a couple


of good antennas and you have the finest amateur satellite earth station available! Cat D-2950

- All modes on all three VHF/UHF bands - 6m 2m and 70 cm (with all modules installed).
- Full duplex crossbanding with satellite unit installed
- 10W output on each band
- Repeater splits for all bands easily programmed into memory
- Dual synthesised VFO's, tuning 20Hz/step
- Speech processor for SSB
- 240V AC operated (12V DC with optional power cable).

**LIMITED STOCK**

**Complete with 2m module!**

**JUST \$1299**



**Great add-ons too!**

### 70cm Module

GaAs FET receiver preamp, operates over full 430-440MHz band with 0.15uV sensitivity (SSB, 12dB SINAD). Cat D-2952

**\$395**

### 6m Module:

Full 50-53.9998 MHz coverage with 0.15uV receiver sensitivity (SSB, 10dB (S-N) /N) Cat D-2951

**\$295**

### Satellite Module

Full duplex crossbanding is so easy and this module does it all for you! Cat D-2953

**\$149**

### DC Power Cable


Run your FT726 from 12V - great for contests, field days, or just getting away from the QRM! Cat D-2954

**\$11<sup>50</sup>**

## RF Balun Kit

Contains a large, quality balun core (50.8mm dia) with a quantity of heavy gauge wire, suitable for up to 1kW. Full instructions supplied. Can be used for a number of antenna types up to 30MHz. In most cases they will eliminate RF breakthrough from amateur and CB gear into audio amplifiers. Cat D-5350

**\$12<sup>95</sup>**



## R.F. Toroid Kit

Contains two iron powder cores, enamelled copper wire, application notes, inductance chart and an LCF nomograph. Toroids are used to advantage in Tank circuits, Pi networks, RF transformers, T-networks, floating tanks, band pass filters, baluns, multi-band tuners antenna loading coils, RF traps IF networks and oscillator tanks. Cat L-1410

**\$4**


## ARRL 1984 Radio H/Book

Each year, the Radio Amateur's Handbook gets bigger, better and totally updated to reflect changes in the state-of-the-art. New projects in this huge 640 page edition include:

- A new kilowatt amplifier for 160, 80 and 40 metres.
  - 4-1000 amplifier for 6 metres
  - A refined version of the Deluxe Audio Filter.
  - A new solid state regulator for automobile alternator systems
- ... And much, much more, including chapters on every aspect of Amateur Radio!

Cat B-2219

**Don't miss out! Get yours now -only \$19<sup>95</sup>**



## YAESU HF/VHF Mobile Ant. System

The fabulous Yaesu antenna system for HF and VHF. You buy the gutter mount base and 2 metre stub, and you're on the air on 2m immediately. As you want the HF bands, simply buy that band resonator/antenna whip and screw it into the 2m stub. You only have to buy the whips for the bands you want. Go mobile with Yaesu.

<b>RSM GUTTER MOUNT</b>	<b>\$25.95</b>
Cat D-4110	
<b>RSE 2A STUB (2M ANTENNA)</b>	<b>\$12.95</b>
Cat D-4102	
<b>RSL 145 6M/2M ANTENNA</b>	<b>\$32.50</b>
Cat D-4104	
<b>RSL 3.5 80M RESONATOR</b>	<b>\$26.50</b>
Cat D-4110	
<b>RSL 7A 40M RESONATOR</b>	<b>\$26.50</b>
Cat D-4112	
<b>RSL 14 20M RESONATOR</b>	<b>\$26.50</b>
Cat D-4114	
<b>RSL 21 15M RESONATOR</b>	<b>\$26.50</b>
Cat D-4116	
<b>RSL 28 10M RESONATOR</b>	<b>\$26.50</b>
Cat D-4118	

## Universal UHF/VHF Kit

Coaxial Neoprene base (coax feed) plus stainless steel whip ready to cut to desired frequency. Complete with cutting chart, suits any 1/4 wave 2m of higher frequency. (Does not include coax). Cat D-4023

**\$11<sup>95</sup>**

## Deluxe UHF Whip

Designed for 430-470MHz use (UHF amateur or CB), stainless steel whip complete with deluxe gutter gripper mount, special coaxial UHF base fitted with RG58 coax and PL259 plug. Ideal for our UHF transceiver kit (Cat K-6300). Cat D-4014

**\$24<sup>50</sup>**



For all these and many more Amateur buys:  
**DICK SMITH ELECTRONICS**

See page 98 for full address details.

A740/LL



## MicroBee Control Program

```

00100 REM Light controller program for the MicroBee
00110 REM
00120 DIM Z(100,2)
00130 CLS
00140 PRINT "Do you want to: 1) Define a pattern"
00150 PRINT "                2) Save a pattern to tape"
00160 PRINT "                3) Load pattern from tape"
00170 PRINT "                4) Run a pattern"
00180 PRINT "                5) Turn all channels off"
00190 PRINT
00200 INPUT "Your selection";A
00210 ON A GOSUB 230,660,830,520,1000
00220 GOTO 130
00230 N=0
00240 L1=0:H1=0:E=0
00250 CLS
00260 PRINT "Program step";N
00270 PRINT "Type 'STOP' to quit this part. Do not use"
00280 INPUT "commas in input. Which channels on (A-N)";A1$
00290 IF A1$="STOP" OR A1$="stop" THEN RETURN
00300 INPUT "For how long (in seconds)";S
00310 REM translate entries to codes for output
00320 FOR B=1 TO LEN(A1$)
00330 B1$=A1$(;B,B)
00340 IF B1$=" " THEN GOTO 420
00350 C=ASC(B1$)-65
00360 C1=FLT(C)
00370 IF C1>13 THEN LET C1=C1-32:REM Allow for lowercase inputs
00380 IF C1<0 OR C1>13 THEN LET E=1
00390 IF C1>7 THEN GOTO 410
00400 L1=L1+2^C1:GOTO 420
00410 H1=H1+2^(C1-7)
00420 NEXT B
00430 IF E=1 THEN PRINT "Error - invalid input ignored"
00440 IF E=1 THEN FOR D=1 TO 1000:NEXT D:GOTO 240
00450 REM store output codes and times in array Z()
00460 Z(N,0)=INT(L1+.1)
00470 Z(N,1)=INT(H1+.1)
00480 Z(N,2)=S
00490 N=N+1
00500 GOTO 240
00510 REM *****
00520 REM *** Read codes from array and turn on channels ***
00530 OUT#1 ON:REM Set parallel port for output
00540 FOR I=0 TO N
00550 L=Z(I,0):H=Z(I,1):S=Z(I,2)
00560 OUT 0,L:OUT 0,L+128
00570 OUT 0,H+128:OUT 0,H
00580 REM Delay for S seconds
00590 REM 800 is approximate factor for one second loop
00600 FOR D=0 TO 800*S:NEXT D
00610 NEXT I
00620 IF KEY$="" THEN GOTO 520:REM Loop unless key pressed
00630 OUT#0:REM Disable parallel port output
00640 RETURN:REM If a key is pressed
00650 REM *****
00660 REM***** Write array contents to tape *****
00670 INPUT "What is the name of this pattern data";B1$
00680 PRINT "Press PLAY and RECORD on cassette recorder"
00690 INPUT "Press RETURN when ready";V1$
00700 OUT#3:REM select 1200 baud cassette output only
00710 FOR I=1 TO 3:PRINT "!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!":NEXT I
00720 REM "!" is dummy data
00730 PRINT "$$$$$$$$$$";B1$:REM Write header and name
00740 PRINT N:REM Write number of steps in this pattern
00750 FOR I=0 TO N
00760 PRINT Z(I,0)
00770 PRINT Z(I,1)
00780 PRINT Z(I,2)
00790 NEXT I
00800 OUT#0:REM Restore video output
00810 RETURN
00820 REM *****
00830 REM***** Read pattern data from tape *****
00840 INPUT "What is the name of the pattern required";T3$
00850 PRINT "Press PLAY on cassette recorder"
00860 INPUT "Press RETURN when ready";V1$
00870 IN#3:OUT#0:OUT#0 OFF:REM 1200 baud input, no output
00880 INPUT T1$
00890 IF T1$(;1,10)<>"$$$$$$$$$" THEN GOTO 880:REM wait for head
00900 T2$=T1$(;11):REM get file name
00910 IF T2$<>T3$ THEN GOTO 880:REM Wait for correct name
00920 INPUT N:REM get number of steps
00930 FOR K=0 TO N
00940 PRINT K
00950 INPUT Z(K,0),Z(K,1),Z(K,2)
00960 NEXT K
00970 IN#0:OUT#0:REM Restore Kbd input, video output
00980 RETURN
00990 *****
01000 REM***** Turn all channels off *****
01010 OUT#1:REM Enable parallel port for output
01020 OUT 0,0:OUT 0,128:OUT 0,0
01030 OUT#0:REM Restore video output
01040 RETURN

```

This control program lets you define light patterns up to 100 steps long on the MicroBee personal computer.

## Programmable light controller

might be set to control 200W — say 10 x 20W bulbs. This would give a total of 80 lamps.

The exact capacity of the controller depends on the details of construction however. Our prototype used mains wiring rated at 7.5A and a 5A mains fuse with eight channels operating. Using cable and a fuse of a higher rating will allow some increase in the capacity of each channel or the use of more channels.

### The software

In spite of the use of the eighth bit to select one or other pair of flipflops, software for the interface is relatively simple. To send a byte to the lower seven channels, set up the pattern required in bits D0 to D6 (a "1" for that channel on, "0" for channel off), with bit D7 equal to "0".

Send this byte to the output port, using either the OUT or POKE statement, depending on your Basic interpreter. The next step is to add 128 to this value and send the result to the output port, producing the transistion which latches the lower seven bits into the flipflops controlling the lower seven channels of the lighting pattern.

To control the upper seven channels, calculate the lower seven bits of the control byte in the same way and add 128 to take bit D7 to "1". Send this byte to the output port, then subtract 128 and send the result to the port, producing a transition of D7 from "1" to "0". When inverted by the interface this transition will latch the control byte into the flipflops controlling the upper seven channels.

Lines 450 to 480 of the System-80 program (Listing 1) show what is required. Here the OUT statement is used, and the data sent to the parallel printer port of the System-80 expansion interface (I/O location 253).

The remainder of listing 1 simply adds convenience features, allowing a sequence of control bytes to be created and sent at a pre-determined rate to the light controller interface. Sequences of instructions can also be saved to disk for later use or recalled and sent to the light controller.

We have used letters to indicate each lighting channel (from A to N). When running the System-80 program, defining a new pattern is simply a matter of typing a string of letters, one for each channel which will be turned on, and a time factor which determines how long this particular program step will last.



**Telephones:**  
**211 0744**  
**211 0816**

# Radio Despatch Service


**Est 1934**

**869 GEORGE STREET, SYDNEY 2000**

## WE STOCK A LARGE RANGE OF SEMICONDUCTORS

	1.24	25up
LM13600	1.61	1.53
DX1488N	1.02	.96
DS1489N	1.30	1.23
MM210IN	5.50	5.22
MM2102N	2.10	1.99
MM2114	3.14	2.98
LM555	.51	.48
LM741-8	.40	.37


**4000 SERIES**  
**7400 SERIES**  
**74LS SERIES**  
**74000 SERIES**  
**74S SERIES**



	1.24	25up
74S00	.65	.52
74S02	.72	.58
74S03	.65	.52
74S04	.72	.58
74S05	.72	.58
74S08	.68	.54
74S09	.72	.58
74S10	.72	.58
74S11	.82	.66
74S15	.72	.58
74S20	.65	.52
74S22	.72	.58
74S30	.72	.58
74S32	.74	.60
74S51	.68	.54
74S74	1.07	.85
74S85	3.22	2.57
74S86	.96	.88

**TOO MANY TO LIST**

## FERGUSON TRANSFORMERS



PL-/2-5VA SERIES	9.30
PL-/5VA SERIES	9.90
PL-/20VA SERIES	17.70
PL-/40VA SERIES	19.50
PL-/60VA SERIES	25.50
TS115/30VA	48.00
TS115/60VA	48.00
TS115/200VA	50.40
TS115/300VA	72.00

## PLEASE NOTE NEW TELEPHONE NUMBERS

**TRADING HOURS:**


**MON TO FRI 8.30am to 5.30pm**

**THURS NIGHT 6.30pm**

**SATURDAY 8.30am to 12pm**

## CASIO PB700 COMPUTER

Display 20 characters x 4 lines — 160 x 32 dot matrix graphic display. RAM capacity — 4K bytes, expandable to 16K. Uses BASIC. Full system expansion — optional 4 colour plotter printer with cassette interface, micro cassette tape recorder.

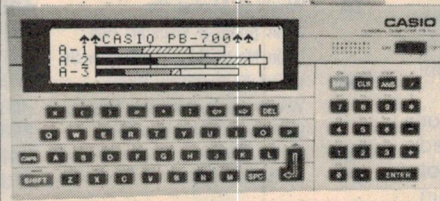

## CALCULATORS

### CASIO

FX550	33.73
FX 82	24.95
FX 910	39.95
FX 990	49.95
FX 450	58.12
PB100	79.95
FX 602P	109.95
FX 702P	169.16
FX 700	124.95
FX 802P	189.95
FX 3600P	49.95

### TEXAS INSTRUMENTS

TI 30-ii	22.00
TI 35	26.00
TI 54	48.00
TI 55 ii	67.00
TI LCD Prog	76.00
BA ii	55.00
BA 55	76.00


### HEWLETT-PACKARD

HP 10 C	109.86
HP 11 C	141.25
HP 12 C	188.34
HP 15 C	188.34
HP 16 C	188.34
HP 41 C	306.06
HP 41 CV	431.63
HP 41 CX	486.56

## HITACHI 20MHZ OSCILLOSCOPE

DUAL TRACE LATEST MODEL

**WHY PAY MORE?**

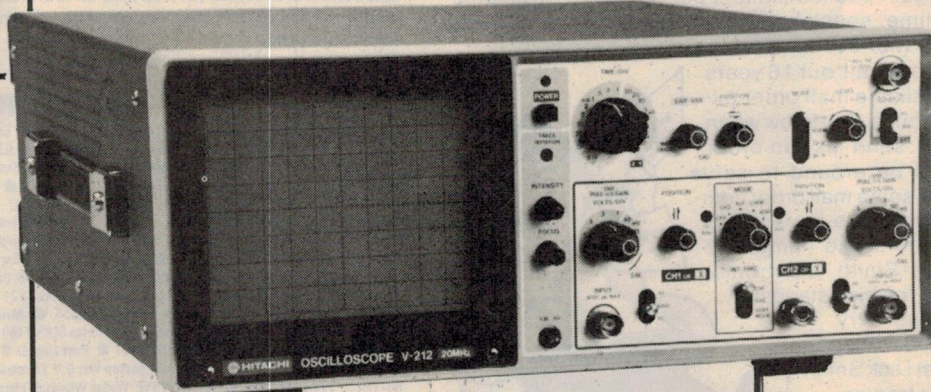

**ALL PRICES  
 INCLUDE  
 SALES TAX.**

ONLY

**\$693.00**



OPENING  
THIS MONTH  
IN  
**DARWIN!**



## 17 Stuart Hwy STUART PARK

Watch your local paper for  
details!

Opening soon in Bendigo  
& Rockhampton


### Consider the advantages of shopping by Mail Order:

★Lightning Fast Service—our fully computerised mail order centre will have your goods speeding back to you within 24 hours of receipt—maximum! (Normally, they're even quicker!)

★Special 14 day Satisfaction Guarantee—our normal 7 day Satisfaction Guarantee is extended to 14 days for mail order customers: If you're not absolutely delighted, return your purchase within 14 days (in original condition) for a full refund. What can you lose?

★New products, mail-order-only specials, etc: as a mail order customer, you'll receive up to 6 bargain packed mailers per year AND, from time to time, special offers for mail order customers only (not even available from our stores!)

★Above all, our 16 years of reliable mail order experience. You know when you send us an order we'll be around to serve you: some mail order companies have given the industry a bad name, but Dick Smith Electronics sets the high standard others try to match. You can trust Dick Smith Electronics.

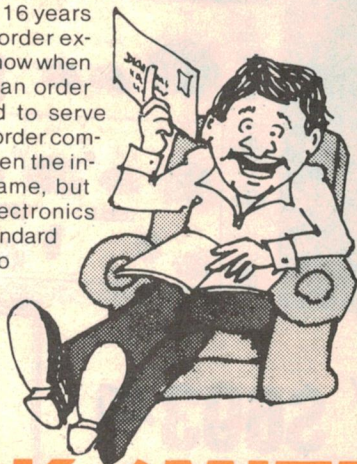

# DICK SMITH ELECTRONICS

## STORE LOCATIONS

<b>NSW</b>	Cnr. Swift & Young Sts. Parramatta Rd & Melton St T55 Terrace Level 613 Princes Hwy Oxford & Adelaide Sts 531 Pittwater Rd 147 Hume Hwy 162 Pacific Hwy 315 Mann St 4 Florence St Elizabeth Dr & Bathurst St 173 Maitland Rd Tighes Hill Lane Cove & Waterloo Rds George & Smith Sts The Gateway, High & Henry Sts 818 George St 6 Bridge St 125 York St Tamworth Acde & Kable Ave 263 Keira St	<b>ALBURY</b> <b>AUBURN</b> <b>BANKSTOWN SQ</b> <b>BLAKEHURST</b> <b>BONDI JCT</b> <b>BROOKVALE</b> <b>CHULLORA</b> <b>GORE HILL</b> <b>GOSFORD</b> <b>HORNSBY</b> <b>LIVERPOOL</b> <b>NEWCASTLE</b> <b>NORTH RYDE</b> <b>PARRAMATTA</b> <b>PENRITH</b> <b>RAILWAY SQ</b> <b>SYDNEY</b> <b>SYDNEY</b> <b>TAMWORTH</b> <b>WOLLONGONG</b> <b>FYSHWICK</b> <b>BALLARAT</b> <b>BRIGHTON (EAST)</b> <b>COBURG</b> <b>FRANKSTON</b> <b>GEELONG</b> <b>MELBOURNE</b> <b>RICHMOND</b> <b>SPRINGVALE</b> <b>BRISBANE</b> <b>BURANDA</b> <b>CHERMSIDE</b> <b>SOUTHPORT</b> <b>TOOWOOMBA</b> <b>TOWNSVILLE</b> <b>ADELAIDE</b> <b>DARLINGTON</b> <b>ENFIELD</b> <b>CANNINGTON</b> <b>PERTH</b> <b>PERTH</b> <b>HOBART</b> <b>STUART PARK</b>	<b>21 8399</b> <b>648 0558</b> <b>707 4888</b> <b>546 7744</b> <b>387 1444</b> <b>93 0441</b> <b>642 8922</b> <b>439 5311</b> <b>25 0235</b> <b>477 6633</b> <b>600 9888</b> <b>61 1896</b> <b>88 3855</b> <b>689 2188</b> <b>32 3400</b> <b>211 3777</b> <b>27 5051</b> <b>267 9111</b> <b>66 1961</b> <b>28 3800</b> <b>80 4944</b> <b>31 5433</b> <b>592 2366</b> <b>383 4455</b> <b>783 9144</b> <b>78 6766</b> <b>67 9834</b> <b>428 1614</b> <b>547 0522</b> <b>229 9377</b> <b>391 6233</b> <b>359 6255</b> <b>32 9863</b> <b>38 4300</b> <b>72 5722</b> <b>212 1962</b> <b>298 8977</b> <b>260 6088</b> <b>451 8666</b> <b>328 6944</b> <b>321 4357</b> <b>31 0800</b> <b>81 1977</b>
<b>ACT</b>	96 Gladstone St Creswick Rd & Webster St Cnr Hawthorn Rd & Nepean Hwy 260 Sydney Rd Nepean Hwy & Ross Smith Ave 205 Melbourne Rd 399 Lonsdale St Bridge Rd & The Boulevarde Springvale & Dandenong Rds	<b>VIC</b>	
<b>QLD</b>	293 Adelaide St 166 Logan Rd Gympie & Hamilton Rds Cnr Gold Coast Hwy & Welch St Bowen & Ruthven Sts Ingham Rd & Cowley St. West End	<b>SA</b>	Wright & Market Sts Main South & Flagstaff Rds Main North Rd & Darlington St
<b>WA</b>	Wharf St & Albany Hwy William St & Robinson Ave Centreway Acde, Hay St	<b>TAS</b>	25 Barrack St
<b>NT</b>	17 Stuart Hwy		

#### Dear Customers,

Quite often, the products we advertise are so popular they run out within a few days. Or unforeseen circumstances might hold up shipments so that advertised lines are not in the stores by the time the advert appears. And very occasionally, an error might slip through our checks and appear in the advert (after all, we're human too!) Please don't blame the store manager or staff: they cannot solve a dock strike on the other side of the world, nor fix an error that's appeared in print. If you're about to drive across town to pick up an advertised line, why not play it safe and give them a call first... just in case!

Thanks.

Dick Smith Electronics

### MAJOR RESELLERS

● **Atherton Qld:** Maarten's Music Centre, 55 Main St 91 1208 ● **Ballina NSW:** A. Cummings & Co., 91-93 River St 86 2285 ● **Bowral NSW:** Barry Gash Electronics, 370 Bong Bong St 61 2577 ● **Broken Hill NSW:** Hobbies & Electronics, 37 Oxide St 88 4098 ● **Bundaberg Qld:** P.M. Electronics Takalvan St 72 8272 ● **Cairns Qld:** Electronic World Shop 27 K-Mart, Westcourt Plaza, Mulgrave Rd. 51 8555 ● **Campbelltown NSW:** Fishers 'Chip' Shop, Shop 3, 274-276 Queen St. 27 1475 ● **Coffs Harbour NSW:** Coffs Harbour Electronics, 3 Coffs Plaza, Park Ave 52 5684 ● **Darwin NT:** Ventronics, 24-26 Cavanagh St 81 3491 ● **Deniliquin NSW:** Deni Electronics, 220 Cressy St 81 3672 ● **East Maitland NSW:** East Maitland Electronics 99 High St 33 7327 ● **Echuca Vic:** Webster Electronics 220 Pakenham St ● **Gladstone Qld:** Purely Electronics Shop 2 Cnr Herbert & Auckland Sts 72 4321 ● **Goondiwindi Qld:** Border T.R.C. 50 Marshall St 171 2353 ● **Gosford NSW:** Tomorrows Electronics & Hi Fi 68 William St 24 7246 ● **Inverell NSW:** Lyn Willing TV 22A Evans St 22 1821 ● **Launceston Tas:** Advanced Electronics 5A The Quadrant 31 7075 ● **Lismore NSW:** Decro Electronics 3A/6-18 Carrington St 21 4137 ● **Mackay Qld:** Stevens Electronics 42 Victoria St 51 1723 ● **Maryborough Qld:** Keller Electronics 218 Adelaide St 21 4559 ● **Morwell Vic:** Morwell Electronics 95 George St 34 6133 ● **Mt Gambier SA:** Hutchesson's Comm. 5 Elizabeth St 25 6404 ● **Mildura Vic:** McWilliams Electronics 110A Langtree Ave 23 6410 ● **Port Macquarie NSW:** Hall of Electronics, Horton Centre, Horton St 83 7440 ● **Nelson Bay NSW:** Dales Dynamics Cinema Mall Stockton St ● **Orange NSW:** M & W Electronics 173 Summer St 62 6491 ● **Port Lincoln S.A.:** Basshams T.V. & Computerworld 22 Liverpool St ● **Rockhampton Qld:** Purely Electronics 15 East St 21 058 ● **Shepparton Vic:** G.V. Electronics Centre 1898 Corio St 21 8866 ● **Townsville Qld:** Tropical TV 49 Fulham Rd. Vincent Village 79 1421 ● **Wagga NSW:** Wagga Wholesale Electronics 89 Forsyth St ● **Whyalla SA:** Mellor Enterprises Shop 2 Forsyth St 45 4764

### STORE HOURS

All Dick Smith stores are open for trading during the normal trading hours for their particular area (either 9-5.30 or 8.30-5). Many stores are also open for late night trading. Please ring the store concerned for their particular hours.



### SPEEDY PHONE/ BANKCARD ORDER SERVICE

Just phone your order and Bankcard details—it's so simple!  
**(02) 888 2105**

Orders only on this number.  
Enquiries: **(02) 888 3200**


### HEAD OFFICE & MAIL ORDER CENTER:

P.O. Box 321, North Ryde  
NSW 2113  
Tel: **(02) 888 3200**

### Post & Packing Charges

Order Value	Charge
\$5-\$9.99	\$2.00
\$10.00-\$24.99	\$3.50
\$25.00-\$49.99	\$4.50
\$50.00-\$99.99	\$6.00
\$100 or more	\$8.00

Terms available to  
approved applicants  
through...



DSE A751/KT



# Programmable light controller

The time factor need not be a integer — inputs of 0.1 second are quite acceptable, although shorter times may not give satisfactory results as the light bulbs take a finite amount of time to reach full brightness after switch on. Fast moving patterns will need to take this into account.

Timing is not precise, being based on a simple FOR ... NEXT loop and a multiplier factor established experimentally.

The time in seconds is multiplied by a number which produces a one second delay loop on the particular computer in use. For the System-80 this value is about 260, but it will require adjustment if the program is used with other computer systems. The delay is produced by lines 490 to 510 of listing 1.

Light control sequences with up to 100 steps can be produced using this program. The total is set by the DIM statement in line 40 and can be changed depending on what is required. At the moment the program is set up so that the pattern repeats continually until a keyboard entry is made (see line 520).

The remainder of listing 1 generates a menu of options, converts channel designations to output codes to the interface and takes care of disk operations. Each subroutine is "stand alone" apart from the initialisation section (lines 30-40), so if you don't want to use disk storage, simply leave out these routines and change line 110 to reflect the new condition.

Listing 2 is for the MicroBee computer, although the string functions used also make it suitable for the Super-80 system. It includes a new subroutine, from line 1000 to line 1040, which simply turns all lighting channels off. A cassette recorder is used for mass storage of lighting sequence rather than disks.

The MicroBee has a feature called "I/O redirection" which requires that the parallel port first be defined as an output before it can be used. This is the purpose of the statement OUT 1 ON in line 530 of listing 2. The tape routines also require separate enabling and disabling statements for the cassette interface, as in lines 870 and 970.

For use with the Super-80 these particular statements can be omitted. Of course, the OUT statements must also be changed to direct output to the parallel printer port of the Super-80 printer interface add-on board, while the cassette routines for the MicroBee will not be appropriate and will need to be

## System-80 Control Program

```

10 REM LIGHT CONTROLLER PROGRAM FOR THE SYSTEM-80
20 REM REQUIRES OS-80 DISK OPERATING SYSTEM
30 DEFINT L,H,E,C
40 DIM CH(100,2)
50 CLS
60 PRINT"DO YOU WANT TO: 1) DEFINE A NEW PATTERN"
70 PRINT"                        2) SAVE A PATTERN TO DISK"
80 PRINT"                        3) LOAD PATTERN FROM DISK"
90 PRINT"                        4) RUN A PATTERN"
100 INPUT"YOUR SELECTION";A
110 ON A GOSUB 130,600,800,400
120 GOTO 50
130 N=0
140 L=0:H=0:E=0
150 CLS
160 PRINT"PROGRAM STEP";N
170 PRINT"TYPE 'STOP' TO QUIT THIS PART. DO NOT USE COMMAS"
180 INPUT"IN INPUT. WHICH CHANNELS ON (A-N)";AS
190 IF AS="STOP" THEN GOTO 390
200 INPUT"FOR HOW LONG (IN SECONDS)";S
210 REM TRANSLATE CHANNEL ENTRIES TO CODES FOR OUTPUT
220 FOR B=1 TO LEN(AS)
230 BS=MID$(AS,B,1)
240 IF BS=" " THEN GOTO 300
250 C=ASC(BS)-65
260 IF C<0 OR C>13 THEN E=1
270 IF C=>7 THEN GOTO 290
280 L=L+2[C
290 H=H+2[(C-7)
300 NEXT B
310 IF E=1 THEN PRINT "ERROR - INVALID INPUT IGNORED"
320 IF E=1 THEN FOR D=1 TO 250:NEXT D:GOTO 140
330 REM STORE OUTPUT CODES AND TIMES IN ARRAY CH()
340 CH(N,0)=L
350 CH(N,1)=H
360 CH(N,2)=S
370 N=N+1
380 GOTO 140
390 RETURN
400 REM READ CODES FROM ARRAY AND TURN ON CHANNELS
410 FOR C=0 TO N
420 L=CH(C,0)
430 H=CH(C,1)
440 S=CH(C,2)
450 OUT 253,L
460 OUT 253,L+128
470 OUT 253,H+128
480 OUT 253,H
490 REM DELAY FOR 'S' SECONDS
500 FOR Z=0 TO 260*S:NEXT Z:REM 260 IS APPROXIMATE FACTOR
510 NEXT C
520 IF INKEY$="" THEN GOTO 400:REM REPEAT UNTIL KEY PRESSED
530 RETURN
600 REM SAVE ARRAY CONTENTS (UP TO 40 STEPS) ON DISK
610 FOR I=0 TO 40
620 DEF FIELD#1, I*6 AS XS,2 AS LS,2 AS HS,2 AS SS
630 L=CH(I,0):H=CH(I,1):S=CH(I,2)
640 LSET LS=MKI$(L)
650 LSET HS=MKI$(H)
660 LSET SS=MKI$(S)
670 NEXT I
680 DEF FIELD#1, 240 AS XX$,2 AS ST$
690 LSET ST$=MKI$(N)
700 INPUT "SECTOR NUMBER OF STORAGE AREA";DS
710 PUT#1,DS
720 PRINT "ARRAY STORED ON DISK SECTOR";DS
730 FOR D=1 TO 1000:NEXT D
740 RETURN
800 REM READ ARRAY CONTENTS FROM DISK
810 INPUT "SECTOR NUMBER OF STORAGE AREA";DS
820 GET#1,DS
830 FOR I=0 TO 40
840 DEF FIELD#1, I*6 AS XS,2 AS LS,2 AS HS,2 AS SS
850 CH(I,0)=CVI$(LS)
860 CH(I,1)=CVI$(HS)
870 CH(I,2)=CVI$(SS)
880 NEXT I
890 DEF FIELD#1, 240 AS XX$,2 AS ST$
900 N=CVI$(ST$)
910 RETURN

```

*This control program is suitable for both System-80 and TRS-80 Model 1 computers. Unlike the MicroBee program, it stores the pattern on disk rather than on tape.*

replaced by routines specific to the Super-80.

## Construction

A sturdy metal box, and quite a large one at that, is the first requisite for construction. We chose a Playmaster Mosfet amplifier box. This is particularly rugged and large enough to fit eight

normal surface mounting sockets on the back panel. With the smaller surface mounting sockets, made by Clipsal, it should be possible to fit the full 14 on the Playmaster box.

If you do select the Playmaster box, a fair amount of "tin-bashing" awaits you. For starters, new front and rear panels will need to be manufactured. The



# Programmable light controller

Playmaster boxes are made overseas, complete with front and rear panel cut outs which don't suit the Light Controller.

While you've got the metal working tools out, make a pair of heatsinks. Two strips of aluminium will be adequate. The area is not critical, but they should be about 190mm long. The Triac mounting holes have to be spaced at 28mm intervals.

We have mounted everything except the output sockets on the front panel of the box. This includes the fuse holder and the data input connector, which are more accessible "up-front". Note that a LED should be mounted on the front panel for each of the output channels, ie if the full 14 outputs are used then 14 indicator LEDs should be used. This will provide verification that a given channel is working, even where the light bulb is blown.

We have also included a reset button and a power indication LED, but both of these items are optional.


When the metalwork is complete, turn your attention to the printed circuit board. The PCB, coded 83pc4, is quite large at 302 x 102mm to allow adequate spacing between the 5V and 240V sections. Begin by inserting the PCB pins (these are for the low voltage connections only). PCB mounting terminal blocks are used for the 240V connections to the board — there are 7 two-way terminals in all.

Insert the ten links before the remaining components. Finish off with the Triacs and be certain to set them all at the same height. This will make it a simple matter to fit the heatsinks when the time comes.

The choice of transformer is not critical — we used a 1A multi-tap 6672. The 7.5V tap is ideal for the project. Actually any transformer with a secondary voltage of between 7.5V and 15V at 500mA can be used. Mount it so that the primary connections are well clear of the PCB. Make sure that the voltage rating of the 2200 $\mu$ F filter capacitor exceeds the rectified voltage of the transformer. With a 7.5V secondary, a 16V rating must be used.

Wiring is with 10-way rainbow cable for the low voltage circuits, and three-core mains flex for the 240V circuits. (Lengths in the parts list are for the eight channel version only). One metre of three-core flex is used for the power cord, and the remainder for the 240V internal wiring.

One metre of the rainbow cable is

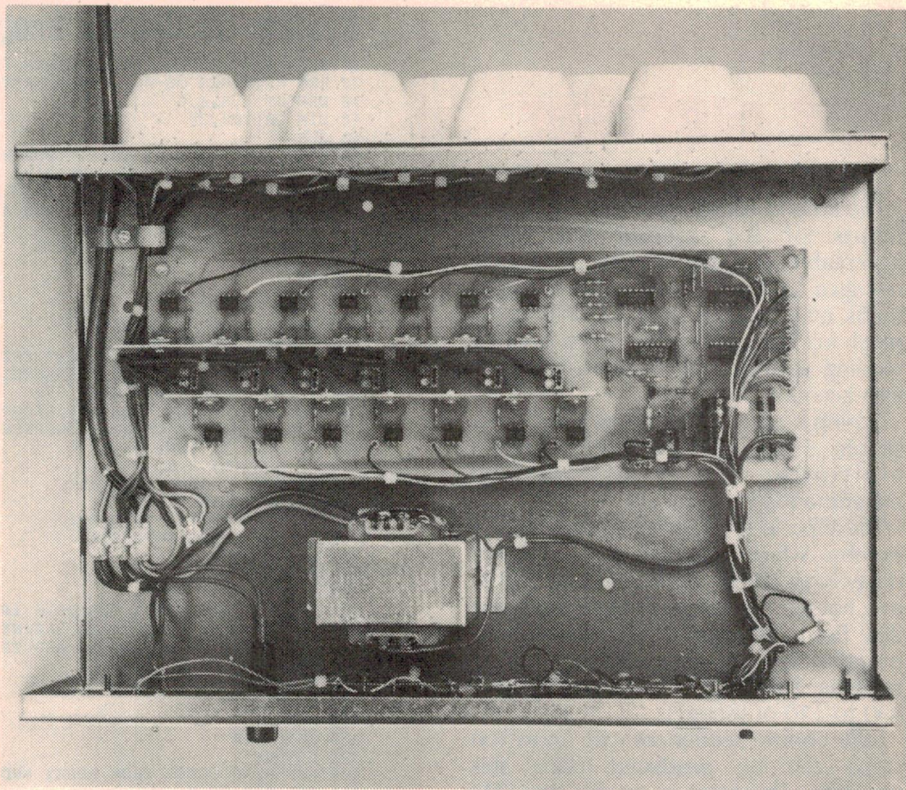

The prototype was built into a Playmaster Mosfet amplifier chassis. Bind the low voltage leads together so that they cannot touch the heatsink.

# DANGER

## 240V

Photostat two copies of this warning label and attach them to the outside surface of each heatsink. Note that the heatsinks are "live" whenever the Light Controller is plugged in.

used for the data input cable. The remainder is stripped down to individual strands and used for the low voltage internal wiring. These should be bound together with small cable ties and the resulting cables so dressed that they cannot make contact with the heatsinks in any circumstances.

Use spaghetti or heatshrink tubing to cover the PCB pins when they have been terminated. Since the heatsinks cannot feasibly be insulated, the best alternative is to avoid exposed low voltage points.

Wherever mains wiring passes through a hole in the metal chassis, the hole should be grommited. Remember that two wires will have to pass through many of the grommets.

When the wiring is complete, the

We estimate the current cost of parts for this project to be

**\$180**

This includes sales tax.

heatsinks can be fitted. Since these heatsinks connect the Triac A2 terminals to the mains active, they are "live" whenever the Light Controller is plugged in. Obviously a shock hazard exists for anyone not mindful of this situation, so we have included a "WARNING 240V" sign. A copy of this should be applied to the outside of each heatsink.

Note that the mains power to the Triacs (and therefore the heatsinks) is not



controlled by S1 – the power switch. Power is available to this part of the circuit as soon as the mains cord is plugged in. This presents no hazard with respect to load devices – they cannot be energised unless the Light Controller is switched on. However, it could be a trap for anyone attempting to troubleshoot the project. **Any mains powered circuit should be unplugged before being worked on, but this is doubly so with the Light Controller.**

A word of warning with respect to the fuse rating may be in order at this stage. The rating of the fuse should be determined by the mains hookup wire used. This is normally 7.5A, necessitating the use of a 5A fuse. Where 10A hookup wire is used, the fuse rating may be increased to 8A. Since power to the fuse is not controlled by the power switch, the Controller must be disconnected from the mains before a fuse change is contemplated.

With a 5A fuse, the maximum instantaneous load for the Light Controller would be 1200W.

## Testing

Before using the Light Controller it is advisable to test it using a low AC voltage and suitable low voltage lamps. The only changes which need to be made are to the active connection to the heatsinks and the neutral connection to the output sockets.

With the unit disconnected from the mains remove the heatsink and socket AC connections from the mains terminal block and temporarily connect them to the secondary of the transformer. For a multi-tap transformer choose any convenient voltage, such as 12VAC. Once this connection is made the light controller can be used normally but the lower AC voltage will be switched through to the output sockets. An array of suitable miniature lamps can then be used to verify operation.

Initially, at least, test the device without connecting it to a computer. A few lamps may illuminate at switch on, but they should extinguish when the Reset button is pressed (where fitted). With a computer connected, you should be able to control the lamps using either of the programs provided here or software of your own devising.

This procedure is not only useful for initial testing but can also be used for troubleshooting if the need arises.

Following this low voltage test procedure, restore the circuit to normal (240VAC) operation by disconnecting the heatsink and socket power leads from the transformer secondary and re-connecting them to the mains terminal block (the active lead is the one connected to the heatsinks, the neutral to the sockets).

## PARTS LIST

- 1 PCB, code 84pc4, 302 x 102mm
- 1 metal case to suit
- 1 Scotchcal front panel label
- 1 mains transformer, secondary 7.5V at 500mA
- 14 3-pin mains sockets (see text)
- 1 data bus plug and socket connector (9-pin D-type)
- 2 pieces 18g aluminium, 190 x 65mm
- 7 2-way PCB-mounting terminal blocks
- 1 3-way mains terminal block
- 1 SPST mains switch
- 1 SPST momentary contact switch
- 4 PCB stand-offs
- 42 small rubber grommets
- 36 small cable ties
- 1 mains cord grommet
- 4 cable clamps (1 large, 3 small)
- 1 3m mains cord and plug
- 29 PCB pins
- 5 solder lugs
- 15 LED bezels
- 1 240V fuse holder
- 1 fuse (see text)
- 2 "DANGER 240V" labels

## SEMICONDUCTORS

- 4 74175 Quad D-type flipflops
- 1 BC548 NPN transistor
- 4 1N4001 diodes
- 1 7805 3-terminal regulator
- 14 MOC3041 Triac drivers
- 14 SC141D Triacs
- 15 LEDs

## CAPACITORS

- 1 2200µF/16V electrolytic (see text)
- 1 470µF/10V electrolytic
- 1 1µF/10V tantalum
- 4 0.1µF ceramics

## RESISTORS (¼W, 5%)

- 1 x 2.2kΩ, 1 x 1kΩ, 1 x 390Ω, 1 x 270Ω, 14 x 100Ω, 14 x 68Ω.


## MISCELLANEOUS

Machine screws and nuts, rainbow cable (two metres), spaghetti insulation, heatshrink tubing, etc.

Without connecting the controller to a computer or any load devices, switch on. Any problems will most likely show up as a blown fuse. Disconnect the unit from the mains before attempting trouble-shooting. If all is well connect some 240V lamps to the output sockets and switch on again. With satisfactory results at this stage you are ready to connect the controller to a computer and try the programs provided.

Footnote: Since completion of this project, it has come to our attention that the MOC3041 Triac driver IC is in short supply. The MOC3040 can be substituted and will be satisfactory in almost all cases. However, it is possible that some will not work properly due to insufficient drive from the 74175 ICs. ☹


**\$2950**

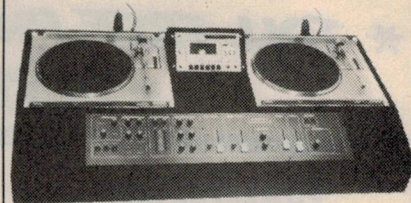

## SUPER DELUXE STEREO SOUND CENTRE

JVC D/D T/T, tape deck 2 mics aux & tape input 3 band eq vox ofr 200 x 200 watts music power.


**\$154**

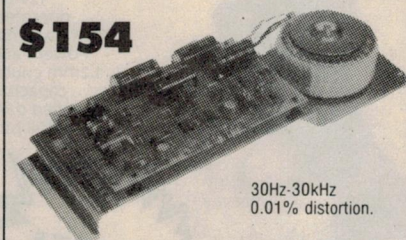

30Hz-30kHz  
0.01% distortion.

## 200 WATTS MUSIC POWER CHASSIS AMP

**\$130**

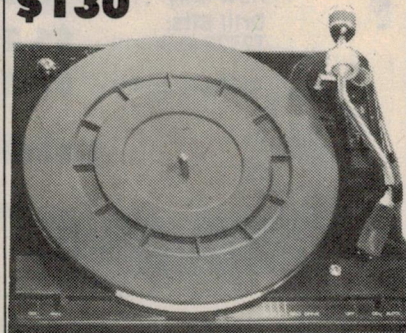

## PE 256 BELT DRIVE BSR T/TABLE

## Cashmore Enterprises

IMPORTERS-MANUFACTURERS OF  
QUALITY SOUND

- LIGHTING – HIRE – SALES – INSTALLATION
- MIRROR BALLS – STROBES – PIN SPOTS – CHASERS – ROPE LIGHTS – 4 ARM SPINNERS, ETC.
- HARDWARE – LIFT OFF HINGES – CORNERS – LARGE STRAP HANDLES.
- PRICE LIST – BROCHURES

**356 LIVERPOOL RD,  
ASHFIELD 2131**

**(02) 799 6129 (02) 798 6782  
TLX AA 74549**

**REHEARSAL STUDIOS NOW AVAILABLE**



# QUALITY ALTRONICS PRODUCTS

**\* TOLL FREE PHONE ORDER SERVICE (008 999 007)**

**\* NEXT DAY JETSERVICE DELIVERY** READ ON! ➡

## POWERFUL 6000 RPM MINI DRILL FOR PC WORK



Tons of Torque.  
Just the shot for  
PCB work.  
12V DC  
operated  
from external  
Power Pack  
1.2mm chuck  
capacity.  
Supplied c/w  
1mm drill bit.

**INCREDIBLE  
VALUE**

T2302  
now only ..... **\$10.00**

Drill Bits:  
T2320 (0.8mm) ... **\$1.25**

T2326 (1.0mm) ... **\$1.25**

**PRICE  
BREAK-  
THROUGH**




## 50 PIN EXPANSION SOCKETS

Right angle type to suit Microbee, floppy disk controllers etc.  
Mounts on PCB and mates with IDC sockets.

P0932 .. **\$6.50**ea 10 up .. **\$6.00**

## HALF PRICE Z80 A

FULL SPEC

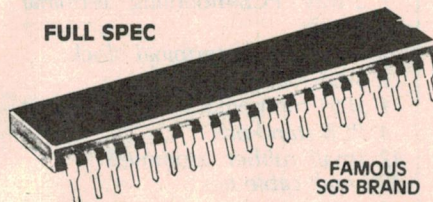

FAMOUS  
SGS BRAND

Z9001 CPU WAS \$8.95 NOW **\$4.50**

Z9005 PIO WAS \$8.95 NOW **\$4.50**

## OOPS WE MADE A BOO BOO!

Right now we have around 1/2 million Premium Quality Genuine Philips IN914/IN4148 Signal Diodes — Out they go at never to be repeated prices.

**BE QUICK** **STOCKS ARE DWINDLING**

	1's	100's	1000's
Z0101 .....	4c	3c	2c

**SAVE ON BULK QUANTITIES**




## VIDEO ENHANCER

Here's a **simple** but **effective** Video Enhancer that is super **easy to build** at a fraction of the cost of commercial models.  
Unit sharpens picture detail, and can actually improve the quality of a copy by amplifying the top end of the video signal.

AT LAST A VIDEO ENHANCER KIT

K5825..... **\$35.00**

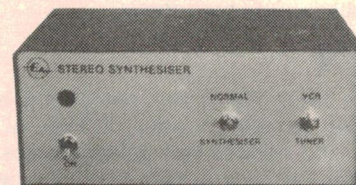

ENJOY THE PLEASURES OF STEREO SOUND  
(See EA Sept. 1982)

## STEREO SYNTHESIZER FOR VCR'S AND TUNERS

Synthesize realistic stereo from virtually any monophonic source by simply connecting this unit between the source and your stereo amplifier.

- ★ Quality Phillips MN3001 (not second source dropout).
- ★ Provision for 2 different signal sources.
- ★ Selection of either source via front panel switch.
- ★ Normal or stereo sound selection.
- ★ Complete kit includes all hardware, cables etc., even solar.

**Important** ★ beware of Kitset suppliers who sell this kit for **less** ★ you get **less!**

K5810..... **\$55.00**

## GO ANYWHERE 12-240V POWER

**MASSIVE  
300 WATTS**



These great Inverter kits enable you to power 240V appliances from a 12V DC power source. Tremendous for camping, fishing etc. Install into your Car, Boat or Caravan.

A fully regulated and overload protected design, featuring XTAL locked frequency. Use to power hi-fi, TV sets, even electric drills for short time periods.

**MANY OF THESE KITS ARE NOW IN USE FOR EMERGENCY LIGHTING PURPOSES.**

ALTRONICS' KIT features ★ Gold plated edge connector and PCB huss ★ Low age rate XTAL ★ Sockets for all IC's ★ High Efficiency Transformer.

K6750..... (EA JUNE '82) ... **\$199.50**

(\$10 DELIVERY AUSTRALIA WIDE)

## 40 WATT MODEL

Suits small appliances, ie. Turntables, Tape Decks, Shavers etc. Variable frequency adjustment enables speed control of turntables. Works as a trickle charger when mains power is available.

EASY CONSTRUCTION ★ VALUE PLUS

K6700..... **\$55.00**



## VIDEO AMPLIFIER



## SINGLE OUTPUT

INVERSE AND NORMAL OUTPUT

Brilliant new kit from EA, **Super cheap** and **Super Effective**. Whilst our K5830 is suitable primarily for VCR use this video amplifier is best suited to use with computers. The EA documentation supplied is extremely well written and provides details for installation into television sets.

**NO MORE SMEARY COLOURS, SIGNAL BEATS OR RF INTERFERENCE**

NOTE ★ NOT SUITABLE FOR USE WITH LIVE CHASSIS TV SETS.

K5850..... **\$14.95**





**\* 14 DAY MONEY BACK SATISFACTION GUARANTEE**  
**\* ALL AT DIRECT IMPORT ALTRONIC PRICES**  
**DICK SMITH — EAT YOUR HEART OUT!**



**NOW IN ABS**  
**"STILL THE SAME PRICE"**

### ALTRONICS JIFFY BOXES


Black plastic body with 22 g. aluminium lid and 4 st. screws supplied. Unique horizontal PC "Snap In" mounts as well as vertical card guides. Order your PC Boards prezised and dispense with costly stand offs, screws etc. These utility boxes are used in dozens of E.T.I. and E.A. projects.

Box	Dimensions	Board Width		Price	10 Up
		Vertical	Horizontal		
H 0101	150 x 90 x 50	90	87	\$2.75	\$2.45
H 0102	195 x 113 x 60	106	103	\$3.75	\$3.40
H 0103	130 x 68 x 41	62	60	\$2.20	\$1.95
H 0105	83 x 54 x 28	50	47	\$1.60	\$1.50

### FUSE HOLDER 3AG

32 x 6.3mm Fuse

S6000.....**95c**  
 10 Up.....**85c** each




### FUSE HOLDER M205

20 x 5mm Fuse

S5990.....**90c**  
 10 UP.....**80c** each



### DIRECT IMPORT PRICE CANNON TYPE CONNECTORS



P 0960	3 Pin Line Male	ea. 10 +
P 0962	3 Pin Chassis Male	4.50 3.95
P 0964	3 Pin Line Female	3.50 3.00
P 0966	3 Pin Chassis Female	4.50 4.00
		4.95 4.50

### CHECK THIS!

#### WATERCLEAR LEDS (ILLUMINATE RED) HIGH INTENSITY

Z0157	1-9	10c
10-99	9c	100 + 8c



### ECONOMY RACK CABINET


- \* Solid steel construction
- \* Black anodised front panel
- \* 3 unit (132mm)
- \* Conforms to International Standards
- \* Ventilated top and side panels



H 0400  
**\$40.00**  
 10 up  
**\$35.00**

### SUPERB KIT POWER SUPPLIES

If you're thinking of buying a power supply then buy from us, we are the experts on power supply kits and carry a supply to suit most enthusiast and professional requirements. READ ON.



#### BENCH STANDARD

- \* 3-30v Output @ 1 Amp.
- \* Fully Regulated, Fully Protected from Thermal Overload and Short Circuits.
- \* ETI Design.

K3205..... (PICTURED)..... **\$49.50**

#### HIGH CURRENT

##### MICROCOMPUTER PS

- \* + 5 Volts @ 3 Amps. \* + 12 Volts @ 2 Amps.
- 12 Volts @ 200 milliamps.


This universal design has enough grunt to power most disk drives.

K3350..... **\$59.50**

13.8 VOLTS @ 10 AMPS HAM'S & CBER'S  
 Save the expense of a Mains Powered Rig.

K3250..... **\$89.50**

#### HIGH CURRENT — DUAL METERING

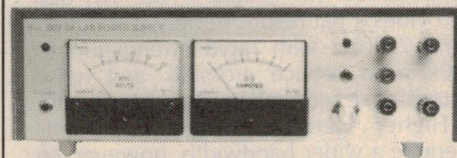

#### EA SWITCH MODE DESIGN

- \* 2-50 Volts at massive 175 Watts.
- \* CLEVER DESIGN — a fully mains isolated supply with a "Switchmode" low voltage circuit.
- \* Easy to build.

K3300... (EA MAY, JUNE '83)... **\$139.00**

K3301... (10 TURN VOLTAGE CONTROL OPTION)... **\$10.00**


K3302... (± 12V OPTION)... **\$12.50**

#### ETI SERIES REGULATOR DESIGN

- \* 0-40 Volts @ 5 Amps — **that's 200 Watts.**
- \* Current limiting 0-5 Amps variable.
- \* Specifications Second to None.
- \* Free from the hum and noise sometimes associated with other techniques.

A PROFESSIONAL SUPPLY


K3325..... (PICTURED).... **\$175.00**



FEATURING: VARIABLE CURRENT LIMIT-DUAL METERING

### CHECK OUR PRICE ON RAINBOW CABLE

Multicoloured Flat Ribbon Cable.  
 .05 inch/.127mm centres.



	Price Per M	Price Per M
	ea.	10 +
W 0510 10 Core	1.10	.95
W 0516 16 Core	1.75	1.60
W 0524 24 Core	2.50	2.25


### DE-SOLDER BRAID



T1230..... **\$1**

### PROFESSIONAL AUTOMATIC WIRE STRIPPER

Automatically adjusts to insulation/wire diameter. This absolutely brilliant stripper is the finest we've ever used.



T 1520




**\$9.50**



# New Products...

## Product reviews, releases & services

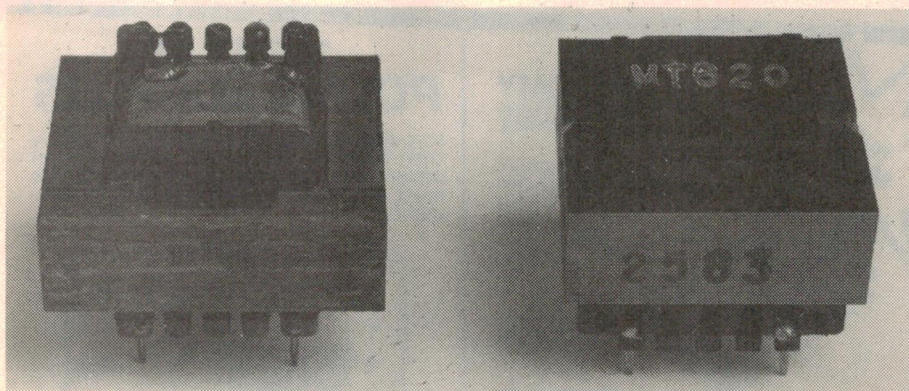

### Telephone isolation transformers from Ferguson

The increasing use of microcomputers has created a demand for modems to link computers via the telephone lines, but Telecom Australia insists on rigid standards of line isolation for such equipment.

To meet this need Ferguson Transformers has added two new Telecom approved line isolation transformers to their range. Both are intended for PCB mounting and are capable of handling most data transmission requirements.

Designated the MT-620 and MT-627, both transformers have a matching impedance of 600Ω. The MT-620 provides a flat response between 300Hz and 2200Hz with rapid attenuation to 20kHz to reduce crosstalk and noise outside the required modem bandwidth.

Higher data transmission speeds require a wider bandwidth, however, so the MT-627 is provided to cover the range from 300Hz to 20kHz.

Both are wholly designed and manufactured in Australia to suit Australian conditions and Telecom requirements.

Other products from Ferguson for the microcomputer market are a new range of mains supply conditioning units.

Appropriately named the "Mini Line Tamers", the range provides four ratings, of 160W, 275W, 550W and 1000W, to meet the needs of all microcomputer systems.

Often computer errors and malfunctions result from fluctuations in the mains supply voltage. These can take the form of short term "spikes" caused by switching machinery on the same mains circuit. Alternatively the mains voltage may rise or fall below the nominal 240VAC.

Ferguson's Mini Line Tamers take care of these problems. They can maintain a nominal 240V AC output for inputs from 190V to 275V and also eliminate power line interference, such as spike voltages caused by lightning.

Where voltage variations are not a problem, but mains borne noise is encountered, a range of noise suppressors is available.

Ferguson engineers have also developed an acoustic treatment to ensure that the Line Tamers operate silently. The units are designed with a vertical format to keep space requirements to a minimum, while extensive use of aluminium extrusions and the encapsulation of the transformer create a rugged, relatively light weight power line conditioner.

Extensive protection circuitry is also built-in, including protection against short circuit of the output and special protective circuitry to guard equipment against power surges at switch-on. As a further safety feature the output sockets are protected by shutters.

"Mini Line Tamers" and Ferguson's line isolation transformers are available from Ferguson Transformers Pty Ltd, 331 High St, Chatswood, NSW, 2067. Phone (02) 407 0261.



### Tiny VHF transceiver from Benelec


The Transair TW-260 is a VHF pocket or handheld FM transceiver that the makers claim is the smallest in the world. Measuring 62 x 36 x 120mm (W x D x H) the TW-260 weighs just 340 grams, including the rechargeable batteries.

The TW-260 can operate on up to six channels in any 3MHz segment between 134MHz and 174MHz. The transmitter delivers 2W and rated deviation is ± 5kHz. The double conversion receiver has a sensitivity of 0.3μV for 12dB SINAD, 0.5μV for 20dB of quieting. Audio output is given as 300mW for less than 10% distortion at 1kHz.

The unit is DOC approved and operates from a rechargeable 7.2V 450mAh nickel cadmium battery which has a life of 8 hours at 5% transmit, 5% receive, 90% standby.

An external microphone/speaker socket is provided so that the transceiver may be mounted on a belt and an optional remote handheld mic/speaker unit attached. Two charger units are available to suit the unit; a plugpack unit and a desktop model allowing the transceiver to be slipped into a cradle with two contacts on the bottom to provide connection to the battery.

Further information, including product catalogs, is available from Benelec, 1 Greville St, Randwick, NSW, 2031. Phone (02) 665 8211.

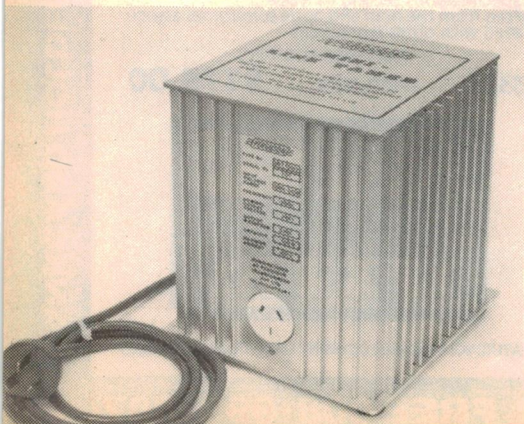



## Philips has thermistors

Response time of Philips' new series 626 and 633 series of miniature NTC (negative temperature coefficient) thermistors is less than one second. The miniature bead devices are intended for applications in temperature sensing, measurement, and compensation circuits.

Resistance ranges of  $1k\Omega$  to  $1M\Omega$  and tolerances of 5, 10 and 20% are available. The 626 series is encapsulated in a glass probe with radial leads and is rated for a maximum power dissipation of 100mW. The 633 series comes in three versions, one a 60mW glass encapsulated type 12mm long and the other naked-bead versions rated for 25mW.

Operating temperature range is  $-55^{\circ}\text{C}$  to  $+300^{\circ}\text{C}$  for the glass types and  $-55^{\circ}\text{C}$  to  $+200^{\circ}\text{C}$  for the naked bead versions.

Further information is available from Philips Electronic Components & Materials, 67 Mars Rd, Lane Cove, 2066. Phone (02) 427 0888.


## Cabinet Industries to introduce new loudspeaker systems

Cabinet Industries and CI Components Pty Ltd will launch a range of Australian designed and manufactured speaker systems this year. To be known as the "Poly-Pro" series, the range will use the Foster Electric Company's polypropylene cone drivers, enclosed in cabinets computer designed to Thiele and Small parameters.

CI Pty Ltd has employed the acoustic engineering consultants Leembruggen and Connor to design the all-important crossover networks for four models in the Poly Pro series. The top of the range will be the series 500, incorporating two Foster 250mm woofers, two 100mm mid-range drivers and the D025N25 phenol dome tweeter.

Cabinet Industries, formerly HSC Timber Industries, has been manufacturing enclosures for recognised speaker brands, including Acoustic Research and Bose, for many years. CI Components stock and distribute Foster speakers in Australia, and carry stage and PA speakers in addition to the home audio range.

For further information contact the company at PO Box 58, Peakhurst, NSW 2210. Phone (02) 534 1746.

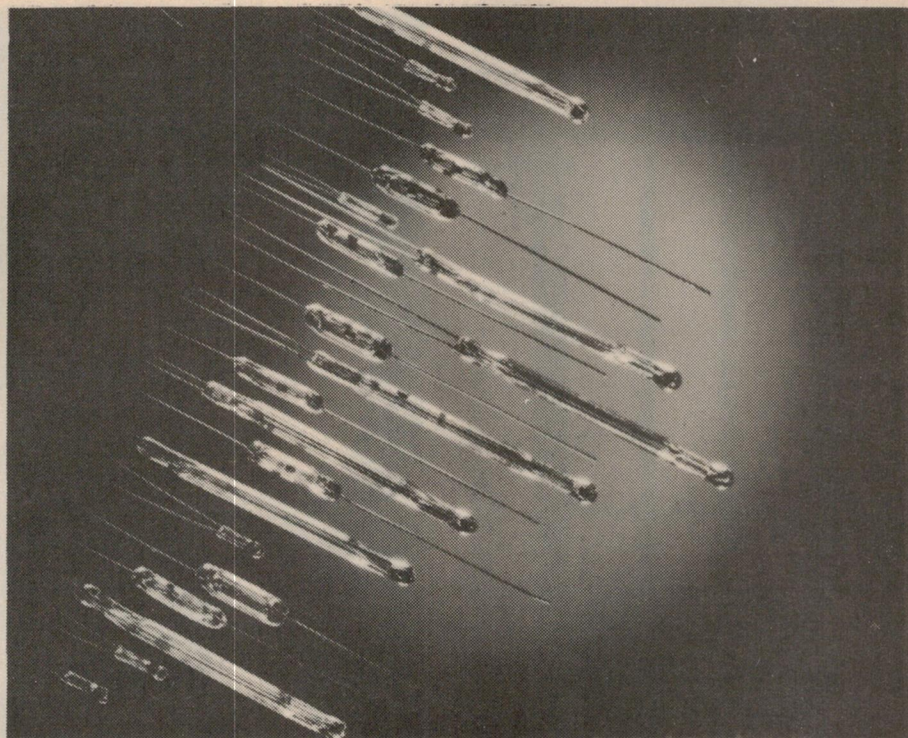


## Imark releases new antenna for amateurs

Imark Pty Ltd has released the Hoxin HS-GP23 antenna for the two metre amateur band. It is a three step colinear type for base station applications, and provides a gain of

7.8dB over a quarter-wave ground plane. It has a 2MHz bandwidth with a VSWR of under 1.5:1. Maximum power rating is 100W CW, length is 4.45 metres and weight is 2kg.

Further information is available from the importers, Imark Pty Ltd, 167 Roden St, West Melbourne, Vic 3003. Phone (03) 329 5433.

## UGI introduces new digital multimeter

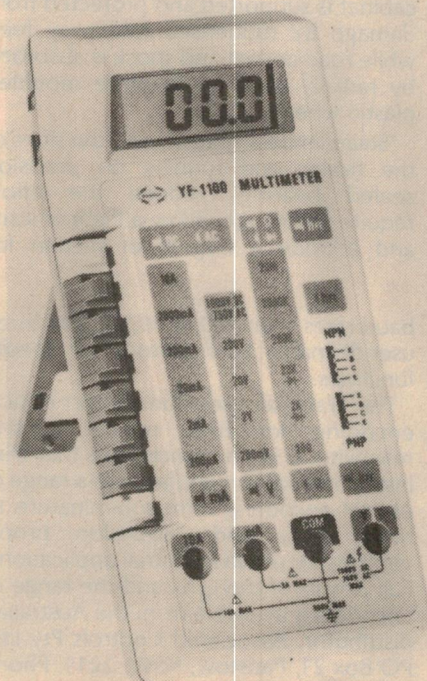

University Graham Instruments now has available a new hand-held digital multimeter, supplied complete with test leads and battery. Features of the instrument include a 12mm high  $3\frac{1}{2}$  digit liquid crystal display reading to 1999 and an in-line push-button switch for function and range selection. A fold-away bench stand is also provided to lift the multimeter to a convenient viewing angle.


Input impedance is  $10M\Omega$  and ranges provided are 200mV to 1000V DC (with high voltage probes),  $200\mu\text{A}$  to 10A, and  $200\Omega$  to  $20M\Omega$ . A transistor tester with hfe indication is also provided.

The ohms resistance ranges are protected against the inadvertent application of high voltages and the use of CMOS circuitry makes for low power consumption. Power is provided by a 9V battery although an input for a plugpack adapter is also available.

Further information is available from University Graham Instruments Pty Ltd, 106 Belmore Rd North, Riverwood, NSW 2210. Phone (02) 53 0644.



## New Products...

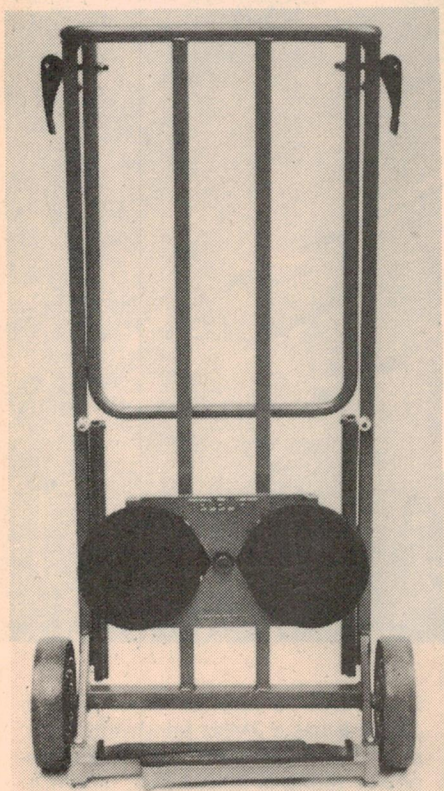

### Telelift takes the strain for TV servicemen

An Australian invention, developed with the financial assistance of the Australian Industrial and Research and Development Incentives Board, is now available to eliminate the problem of "TV serviceman back-ache".

The "Telelift" is a unique trolley design which makes the movement of heavy and expensive television receivers an easy one-man job, rather than a back-breaking chore.

Four years of research and development have perfected the design, and Telelift has been field-tested with one of the largest TV rental companies in



the UK over the last fifteen months.

The device is a specially designed trolley which incorporates powerful rubber suction pads to grip the faceplate of the TV tube. Once the TV set is locked into place it can be swivelled through a 90° angle to negotiate narrow doorways. During transport the receiver cabinet is supported and protected from damage by rubberised fold-away feet, while road impact and shock is absorbed by radially spoked one-piece moulded plastic wheels.

"Stair-climbers" attached to the sides of the trolley and running on precision sealed bearings reduce the effort required while ascending a flight of stairs and provide a degree of friction for

control during descent. The handle of the Telelift is extendable and folds away for stowage in the back of a delivery van. Unloaded weight of the trolley is 9kg and height is 90cm.

The trolley allows TV sets to be lifted and lowered at heights of up to 91cm, making light work of the removal of equipment from a stand or the rear of a van.

As at March this year over 100 Telelift units have been sold in Australia, the UK, and the United States.

Further information is available from Telelift (Australia) Pty Ltd, 23 Atchison St, St Leonards, NSW 2065. Phone (02) 439 6860 or in Melbourne contact Mr Rod Foster on 850 1339.

### Stand alone Trackball from Disc Instruments

Disc Instruments has recently released the "Lynx" stand-alone trackball, which uses a freely rotating ball partially enclosed in a housing to input position co-ordinates to computers and terminals.

The distributors emphasise that trackballs take up very little desk space when compared with a "mouse" or digitising pad. The "Lynx" device provides an RS-232C serial output at

baud rates from 300 to 19,200 and three user-definable push-buttons for special functions.

The Trackball uses non-contact optical encoding for high resolution and reliability. It is no coincidence that Disc Instruments also manufactures a range of optical encoders, from sub-miniature to heavy duty and "explosion proof" versions for use in industrial applications. Full details of the Lynx and the range of encoders is available from the Australian distributor, Associated Controls Pty Ltd, PO Box 21, Padstow, NSW, 2211. Phone (02) 709 5700.





## 12V rechargeable gel battery

Readers looking for a 12V standby battery for the car alarm published on page 45 of this issue will be interested in the Arista Lab-1. It is a sealed rechargeable lead acid battery with a nominal voltage of 12V and a capacity of 1.2 ampere-hours (60mA discharge at the 20-hour rate.)

The Lab-1 is suitable for such applications as burglar alarms, emergency lighting, video cameras and portable TV sets. The battery case is



made of ABS plastic and measures 100 x 45 x 53mm. Weight is 600 grams. Trade enquiries should be directed to Arista Electronics Pty Ltd, Phone (02) 660 0500.


## Minature toggle switches from STC-Cannon

STC-Cannon Components now has available a new series of sub-miniature toggle switches, in either SPDT or DPDT versions rated at 3A at 125VAC.

The switches use a slow-make, slow-break contact mechanism and are suited for low voltage power switching

applications. The switch-base is moulded in insulating plastic resin and is resistant to soldering temperatures, humidity and electrical arc tracking.

Further information is available from STC-Cannon Pty Ltd, 248 Wickham Rd, Moorabbin, Vic 3189.

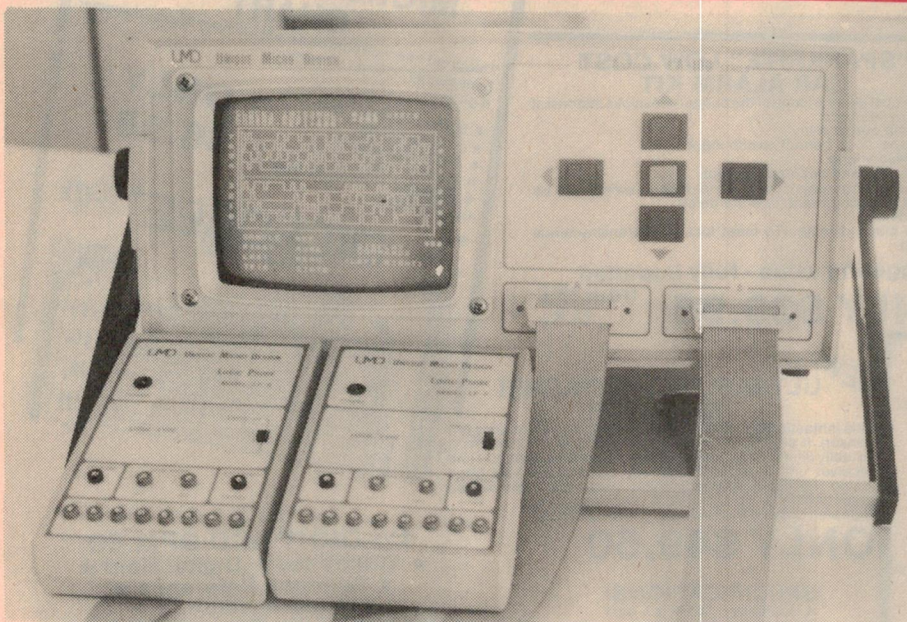

## Logic analysers have built-in display

Data Digital Systems has introduced a new series of logic analysers, the UMD LA-100 range.


These logic analysers are designed and built in Australia by Unique Micro Design Pty Ltd and are available in 8 and 16-channel versions. Features include an integral CRT display, control by a combination of on-screen menus and simple front panel pushbuttons and data capture rates of up to 10MHz.

A variety of different displays can be

selected, with timing or state diagrams, or read-outs in binary, hex or ASCII. An external pod converts the 8-channel model to a 16-channel instrument, or allows the use of eight channels with memory capacity doubled to 512 bits. Two qualifying inputs, such as a clock or strobe signal, can be used in conjunction with each eight channel group in addition to the standard system clock connection.

Further information on the logic analysers is available from Data Digital Systems Pty Ltd, PO Box 104, Burwood, Vic 3124. (03) 568 6922. In Sydney phone (02) 635 6290.

## PRINTER and TERMINAL CABLES

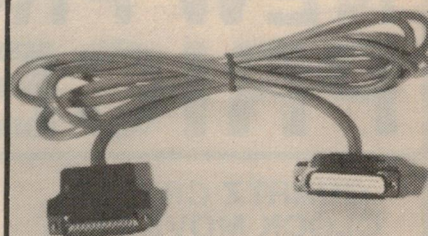


All Serial \$18.00  
All Parallel \$32.00

suit

OSBORNE, IBM, COMMODORE,  
APPLE, KAYPRO, TANDY, etc

## CONNECTORS SOCKETS and CABLES

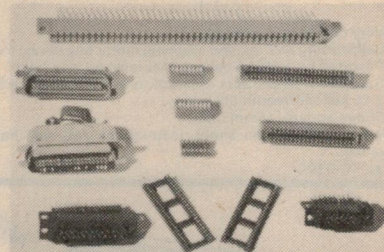

### QUALITY GOLD CONNECTORS

25-way male...	\$2.40	36-way ribbon...	\$10.00
25-way female...	\$2.80	36-way solder...	\$12.00
25-way ribbon...	\$9.00	40-way edge...	\$ 8.00
25-way covers...	\$2.80	26-way edge...	\$ 6.50

## PRINTERS



120 CPS DOT MATRIX  
SAME PRICE AS 80 CPS

ONLY \$545.00 incl Tax and Cable

PLEASE SUPPLY THE FOLLOWING:

.....  
.....  
.....  
.....  
.....

BANKCARD No. ....  
Add 10% P&P minimum \$2.50

## ARBITER ELECTRONICS


Shop 82, Stafford City,  
Stafford Road,  
Brisbane, Qld 4053



# JAYCAR No.1 AGAIN FOR NEW PRODUCTS AT GREAT PRICES!

**\$459.00**

## QUARTZ CRYSTAL CLOCK MOVEMENT



**\$14.95**


- Very compact and reliable
- Self starting one-second stepping motor has strong torque
- Powered by 1.5V AA battery that lasts for one year
- Supplied with two sets of hands, one short and one long
- $\pm 15$  second/month accuracy
- 56mm square, 15mm deep
- Complete with data sheet, instructions and wall hanger bracket.

Cat. XC-0100

- NOT CHEAP BUT WHAT IS YOUR LICENCE WORTH?
- THE AUSSIE DETECTOR EXPORTED TO THE USA!

## RADAR DETECTOR

There are many different detectors on the market. We studied them all and decided there is only one to stock, the best. The fabulous Computer-Heterodyne Micro Eye. The first radar detector with on-board computer. Detectors hanging from the windscreen obstructing vision are out. The compact Micro Eye measures 95mm x 101mm x 38mm, slightly larger than a cigarette box.

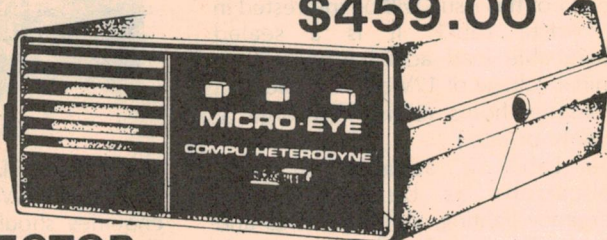

It has a range of up to 3km on K band and the X band is up to 3 times that of conventional radar detectors. False alarms have been virtually eliminated since the micro-computer provides the detector with the ability to distinguish between the short pulses of mobile police radar and the constant emissions of microwave burglar alarms. The computer intelligence of the Micro Eye gives it the ability to be the ONLY\* detector available which can consistently and reliably pick up the ground speed pulses of mobile police radar. Is your licence worth \$459?

Supplied with sunvisor or standard mounting brackets, full instructions and 12 months warranty.

\*As stated in the manufacturers technical literature.

Cat. AR-0900

## APOLOGY

On page 11 of the April issue of EA the price of the KA 1498 AM tuner kit was incorrect. The correct price for the kit was \$229 — not \$129 as shown. We apologise to our customers for any inconvenience.



Cat. KJ-6662

**NEW!!**

## "SPARKRITE" LOW COST CAR ALARM KIT

- This low cost alarm is ideal for the budget conscious motorist. It has many features:
- ★ 10 amp output relay
  - ★ Optional door, bonnet switch input
  - ★ Accessory loop
  - ★ Horn relay and headlamp output
  - ★ Optional entry delay i.e. external disarm switch can be fitted obviating need for entry delay
  - ★ Exit delay
  - ★ Auto alarm disable. (To meet local noise/environmental rules)

Staggering value - fully imported  
**ONLY \$39.95** from the U.K.

## UHF/VHF INDOOR

The ultimate indoor antenna - built-in mixer for UHF/VHF-FM - wide frequency band from 40MHz to 890MHz - directional fine tuning possible with variable direction inner loop - easy to mount and will even hang on the wall - 75 ohm impedance with coaxial cable and plug.

Cat. LT-3120

**\$44.50**



**NEW!!**

## ULTRASONIC INTRUDER DETECTOR

This fantastic little kit attaches to virtually any car alarm (as a sensor). It sets up an ultrasonic field inside the car that is virtually immune to false triggering. A special transmitter and receiver unit is supplied that can be unobtrusively fitted inside the cabin. Any movement inside the cabin will be detected and a trip signal sent to your car alarm. Complete kit and instructions. Cat. KJ-6650

**ONLY \$49.50**

### SPECIFICATIONS:

- ★ Accuracy -  $0.01\% \pm 1$  digit
- ★ Linearity -  $\pm 1$  digit
- ★ Samples/Sec - 1.6
- ★ Temperature Stability - 50ppm/ $^{\circ}$ C typical
- ★ Temperature Range -  $0-35^{\circ}$ C
- ★ Supply Voltage - 7.5 - 15V
- ★ Supply Current - 1mA typical
- ★ Maximum DC Input Voltage -  $\pm 20$ V



## MICROBEE HANDY CHART


This great new wall chart is a must for every MicroBee owner. It measures 600mm x 740mm. It gives:

- ★ Screen Poke locations
- ★ Graphic codes
- ★ ASCII equivalents
- ★ Memory map
- ★ Expansion socket pinouts

Cat. XB-9400

**ONLY \$6.95**

**MICROBEE**  
HANDY-CHART

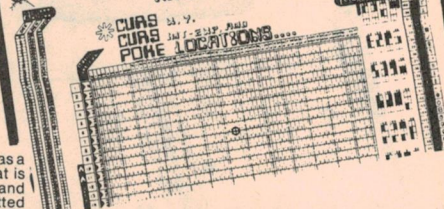

**NEW**

## 4 1/2 DIGIT LCD DPM 60

- ★ 200mV fsd
- ★ Digital Hold
- ★ Bandgap Reference
- ★ 10uV Resolution

A new 4 1/2 digit LCD DPM offering levels of performance, low current consumption and compact size never previously available. The DPM 60 features auto-zero, auto-polarity, a logic switched 200mV or 2V fsd, digital hold, programmable decimal points and a 1mA current consumption. Automatic low battery indication and 'continuity' flags are built into the 10mm 4 1/2 digit display. The DPM 60 can be readily scaled by the user to indicate many different units, amps, volts, ohms etc. Supplied complete with fixing bezel, clips and connector. The DPM 60 will suit many applications calling for low-cost, high accuracy measurements in portable or bench instruments.

Cat. QP-5520



**\$89.95**

## MICRON DATA CASSETTE

A recorder designed solely for the purpose of data storage now at an unbelievable price.

- Slide volume control a must for quick checking of levels
- Tape counter a must for easy location of programs
- Inbuilt piezo transducer enables you to listen to tape

6V DC operation - use with MP-3010 plug pack ensures low hum level (optional \$12.50)


- Robust construction of both internal mechanism's and external case.

Cat. XC-4900

"MANY THANKS CLIVE"

**\$49.50**



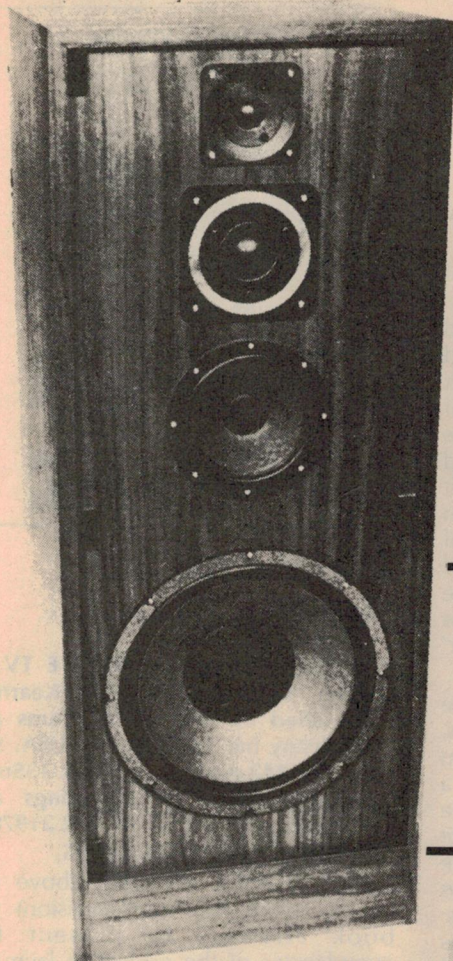

## UNBELIEVABLE 'PHILIPS' SPEAKER BARGAIN


We have made a massive scoop purchase of genuine quality Philips European made Hi Fi speakers. They are so good they are used in the fabulous ETI 4000 series Hi Fi. If you thought the 4000/1 or 4000/2 systems were out of reach of your pocket - THINK AGAIN!

SAVE UP TO  
**\$105**

### NEW - HEATSINK TYPE CLAMPS FOR SOLDERING

A pair of clamps, one straight, one offset.  
Cat. TS-1652

**\$3.50**



### BLOOD-PRESSURE MEASURING MACHINE

Not a kit, tested and guaranteed.  
One of the best presented items that we have seen for a long time.

This high quality SPHYGMOMANOMETER (to use the technical term) enables you to perform accurate blood pressure measurements at home without a doctor. (You should consult a doctor, of course, to interpret the readings).

The unit includes inflatable cuff, pressure gauge, hand pump and inbuilt pressure transducer which eliminates the need for a stethoscope.

Included is a comprehensive instruction booklet, blood pressure record keeping charts (plenty of spares), handsome vinyl case and even a 9V battery. All that you need to supply is an arm and blood pressure!!

Cat. QM-6100

only  
**\$79.95**

NEW!!



ONLY **\$99.50**



NEW!!!

### HEART RATE MONITOR

Not a kit. Built, tested and guaranteed.

This fully self-contained unit enables you to monitor your pulse rate - anywhere!!

The unit features large, easy to read LED display and comfortable finger grip pulse sensor.

An exclusive feature is the bracket that enables you to mount the unit to tubular objects such as a bike (or exercise bike), weight training equipment etc.

NOW you can monitor your heartbeat accurately and easily while in the middle of exercise!!

The comprehensive booklet gives you explicit instructions on use of the monitor as well as mounting guidelines.

Once again this is a beautifully presented piece of equipment. Included, are mounting bracket, vinyl case, instructions and 9V battery.

Cat. QM-6110

WOOFER AD12250/WB  
NORMALLY \$99.50 SAVE \$30.00  
THIS MONTH \$69.50  
LOW MID AD70620/M8  
NORMALLY \$32.50 SAVE \$5.00  
THIS MONTH \$27.50  
HIGH MID AD02161/SQ8  
NORMALLY \$44.95 SAVE \$5.00  
THIS MONTH \$44.95  
TWEETER AD0160/T8  
NORMALLY \$19.95 SAVE \$4.00  
THIS MONTH \$15.95

**\$201.90 value for \$157.90 SAVE \$44**  
EVEN CHEAPER for a stereo set i.e. 2 each of the above **\$315.80**


**SPECIAL 8 PIECE SET PRICE \$299!!**

Normal price for 8 speaker set \$399!!  
Crossovers 2 x 4 (ETI4000/1) \$200 Cat. CX-2637  
2 x 3 (ETI4000/2) \$129.50 Cat. CX-2627

### BACK IN STOCK - WE HOPE!! SUPER BRIGHT LED's

200mCd @ 20mA Red 5mm Cat. ZD-1790  
1-9 69¢ 10 up 62¢ ea  
500 mCd @ 20mA Red 5mm Cat. ZD-1792  
1-9 \$2.95 10 up \$2.50 each  
80mCd @ 20mA Green 5mm Cat. ZD-1794  
1-9 95¢ 10 up 85¢ each  
160mCd @ 20mA Yellow 5mm Cat. ZD-1795  
1-9 95¢ 10 up 85¢ each  
Remember! Your average 15 cent Red LED is generally around 1.8mCd at 20mA so imagine what you can do with these. WILL GIVE USEFUL LIGHT DOWN TO 1mA!!

### KAISE DIGITAL MULTIMETER SK 6100

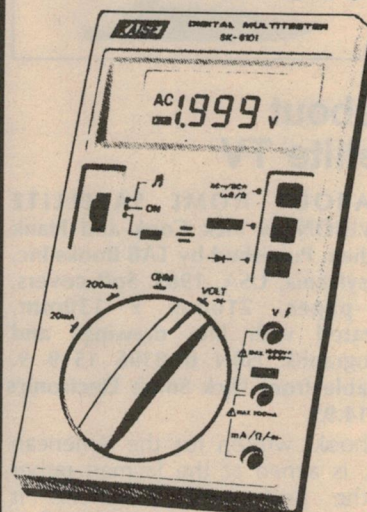

Check the specifications/features of this superb Digital Multimeter.

- Autoranging with manual override
- Auto polarity displays - sign when probes reversed
- Overrange indication "Blink" and buzzer warning
- Low battery warning BATT sign shows
- Sampling rate 2 times second
- Power supply 2 x A penlight batteries (300 hours continuous operation)
- Fuse protected, spare fuse provided
- Zero adjustment, zero adjust button - a must if you change test probes
- LCD display, magnificent clear readout
- Inbuilt buzzer, available for continuity test, overload warning and switch warning
- Ranges  $\pm 1000V$  DC/600V AC, AC and DC current, resistance 200 (resolution 0.1 ohm) to 2000K ohm (resolution 1K ohm) in 5 ranges autoranging
- Accuracy 0.5% DC, 0.8% AC

Cat. QM-1525

**\$59.95**

**Jaycar**

Incorporating  
ELECTRONIC AGENCIES

SYDNEY

SHOWROOMS

117 YORK STREET - PHONE: (02) 264 6688 and (02) 267 1614

CARLINGFORD

TELEX: 72293

Cnr. CARLINGFORD & PENNANT HILLS ROAD - PHONE: (02) 872 4444

CONCORD

115 - 117 PARRAMATTA ROAD - PHONE: (02) 745 3077

HURSTVILLE 121 FOREST ROAD - PHONE: (02) 570 7000

### NUMBER 1 FOR KITS

POST AND PACKING CHARGES

\$5 - \$9.99 (\$1.50) \$10 - \$24.99 (\$3.20)  
\$25 - \$49.99 (\$4.50) \$50 - \$99.99 (\$6.50)  
\$100 - \$199 (\$8.00) Over \$199 (\$10)

\*Free INSURANCE for Road & Registered Post over \$200\*

All heavy or bulky items (over 20kg.) sent Comet Road Freight \$12.00 anywhere in Australia.

SHOP HOURS CARLINGFORD, CONCORD & HURSTVILLE  
Mon - Fri 9am - 5.30pm: Sat - 9am - 12pm: Thurs night 8.30pm (Not Concord)

SHOP HOURS SYDNEY  
Mon - Fri 8.30am - 5.30pm: Sat - 8.30am - 12pm: Thurs night 8.30pm

MAIL ORDERS AND CORRESPONDENCE: P.O. Box 185, Concord, 2137



Mail Order

By





BANKCARD

Via Your Phone

**STOP PRESS!! NOW OPEN ALL DAY SATURDAY (CONCORD STORE ONLY)**



# Books & Literature

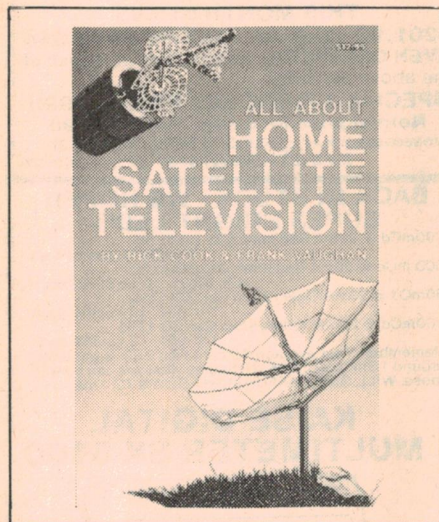

## All about Satellite TV

**ALL ABOUT HOME SATELLITE TELEVISION** by Rick Cook and Frank Vaughan. Published by TAB Books Inc, Pennsylvania, USA, 1983. Soft covers, 326 pages, 210mm x 130mm, illustrated with line drawings and photographs. ISBN 0 8306 1519 9. Available from Dick Smith Electronics for \$14.95.

This book, written for the American market, is aimed at the layman rather than the professional engineer. It describes how satellite TV works, offers practical advice on equipment selection and installation, and discusses the pros and cons of satellite TV as it relates to the US scene: It is a practical alternative to network and cable TV? Can you set up your own ground station? What will it cost? What are the legal restrictions? What services are available?

Unfortunately, for the Australian reader who may be looking for advance information on satellite TV in anticipation of AUSSAT and the direct broadcasting service it will bring, this book will prove of little value. First, there are technical differences. All the satellites discussed in this book operate in the 4GHz (downlink) and 6GHz (uplink) bands, whereas Australia's system is to use 12GHz (downlink) and 14GHz (uplink) bands. As a result, typical performance figures for dishes and associated equipment, quoted in this

book, have little bearing on the local scene.

Just as important are the legal and commercial differences. The United States does not appear to have a direct broadcasting service as planned for Australia and, in fact, part of the book is devoted to debating the possibility and desirability of such a service. Most satellite TV reception in the US is from satellites relaying signals on behalf of cable distribution networks, who regard private ground stations as illegal. There are some satellite subscription services but, again, there is much "illegal" reception of these signals.

While the book attempts to explain the satellite TV system in layman's terms, many of the explanations are far from satisfying and of doubtful accuracy. At a quick glance we noted the following: the suggestion that only those signals above 1000MHz will penetrate the Heaviside layer; that the spacing between satellites in space is limited by the weak signals; the suggestion that the TV signals through the satellite are (time division) multiplexed and that they can still be received without the need for any special decoding.

Over one third of the book (110 pages) is devoted to appendices covering satellites and frequency allocations and, while these may be useful to US readers, they are of little value in Australia. Also, some, at least, of these lists have been so reduced in size that they have printed very poorly and are difficult to read.

Chapter 5 – Getting Stated in Satellite Television – probably comes closest to providing some useful background for the local scene. In spite of the technical differences already noted it does offer some broad information on the mechanics of erecting a dish, and some of the procedures necessary to determine the direction in which it must be pointed. While needing to be transferred to the southern hemisphere, it may still be useful.

Otherwise the book would be most useful in providing an insight into the US TV – and particularly the satellite TV – scene, the many legal problems which have arisen, and the obvious difficulty there is going to be in getting the mess sorted out.

Not particularly recommended. (P.G.W.)



## Introduction to Satellite TV

**INTRODUCTION TO SATELLITE TV** by Chris Bowick and Tim Kearney. Published by Howard W. Sams and Company Inc, Indianapolis, USA. Soft covers, 142 pages, 215mm x 135mm. Illustrated with line drawings and photographs. ISBN 0 672 21978 6. Recommended price, \$17.95.

Like the book reviewed above (All About Home Satellite Television) this book attempts to present the complexities of the subject at layman's level, but with more emphasis on basic principles than the "do-it-yourself" aspect.

Just how well the authors have succeeded depends a lot on the reader's technical background. The true layman – the non-technical man-in-the-street – would undoubtedly be lost (which is not necessarily a criticism), whereas readers of this magazine could probably digest most of it. In short, it is a much better effort than the previous one.

That is not to say that it has no shortcomings. In the early chapters, particularly, the authors allow themselves to be sidetracked in qualifying and expanding basic statements, and also become unduly repetitive in places. There is also the problem of trying to combine technical explanations with political, commercial, and legal problems.

And, as far as the Australian reader is concerned, the points raised in the previous review concerning the differences between the US 4GHz/6GHz system and the 12GHz/14GHz system to be used by AUSSAT still apply. However, there is a brief appendix devoted to the latter system.

The later chapters fare better than the early ones, and the reader with a general technical background, but lacking an




understanding of satellite systems, should at least obtain a useful grounding from it.

The chapter headings are as follows: Chapter 1, Satellite Communications. (2) The Satellite TV System. (3) Receiving Antennas and Low Noise Amplifiers. (4) The Satellite TV Receiver. Appendix A, Glossary. (B) Direct Broadcast System. (C) Locating the Satellites and Aiming the Antenna. There is also a short bibliography.

For anyone wanting to "update" to satellite TV thinking, this book is probably the best we have seen to date and, at the price quoted, would seem to be reasonable value for money.

Our copy from Technical Book and Magazine Company Pty Ltd, 289 Swanston St, Melbourne, Victoria, 3000. (P.G.W.)

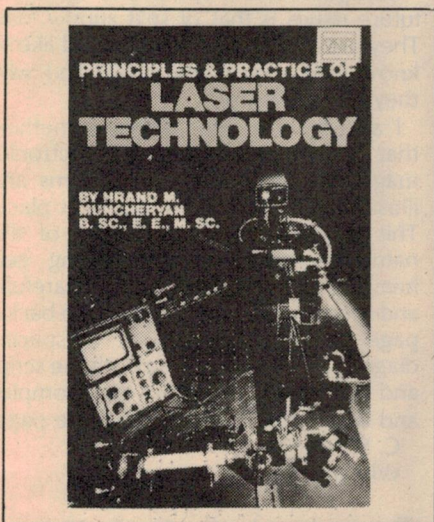

## Laser technology

**PRINCIPLES & PRACTICE OF LASER TECHNOLOGY** by H. M. Muncheryan. Published 1983 by Tab Books Inc, Blue Ridge Summit, Pa. Soft covers, 130 x 210mm, 298 pages. Illustrated with photos and diagrams. ISBN 0 8 8306 1529 6. Distributed in Australia by Thomas Nelson Australia. \$25.00.

This text should not be confused with another book by the same author which was reviewed in the December 1983 issue. This new book is quite different in content although the subject headings and treatment are similar. And in spite of the fact that the new book was published more recently it does not seem to be any more up to date. It does not cover the laser technology used in the latest compact disc players nor does it mention recent laser applications in surveying and agriculture.

In view of the fact that the earlier book is available in hard cover form at a lower price, it would be the better buy. (L.D.S.)

# INTERESTED IN ELECTRONICS? THEN WHY NOT TURN YOUR HOBBY INTO A CAREER?



Alan Mulraney, Stott's Graduate, in his workshop.


In this fast-changing electronic world people with interest and training are going to be in demand. Turn your interest into a lucrative career in any one of the following fields:

**Computers • Industrial Controls • Medicine  
Radio Communications • Domestic Radio & Television**


Electronics plays an important role in these and many other fields. With a Stott's Home Study Course, training is easy, and will prepare you for a career in the manufacture, installation, commissioning, sales or servicing of electronic equipment.

You'll have experienced, professional instructors who will guide you through an integrated theory/practical program. They'll give you individual attention and advice, and prompt replies to all test assignments and queries. And best of all, you'll study at your own pace, in your own home.

Send the coupon today. It may be the smartest move of your life.



**Stott's**  
CORRESPONDENCE COLLEGE



**The name to trust in correspondence education.**

**Please send me free, and without obligation, full details of the following courses:**

\_\_\_\_\_ (PLEASE PRINT)

\_\_\_\_\_

MR. MRS. MISS \_\_\_\_\_ AGE \_\_\_\_\_

ADDRESS \_\_\_\_\_

\_\_\_\_\_ POSTCODE \_\_\_\_\_

Stott's undertake that no sales counsellor will visit you.

Melbourne, 140 Flinders Street, 3000. Tel: 63 6212  
Sydney, 383 George Street, 2000. Tel: 29 2445  
Brisbane, Suite 3, 65 Mary Street, 4000. Tel: 221 3972  
Adelaide, 85 Pirie Street, 5000. Tel: 223 3700  
W. Perth, 25 Richardson Street, 6005. Tel: 322 5481  
Hobart, 150 Collins Street, 7000. Tel: 34 2399  
New Zealand, Box No 30-990, Lower Hutt. Tel: 676 592

**The Stott's range of courses in Electronics is:**

Intro to Electronics  
 Digital Electronics for Technicians/Servicemen  
 Microprocessors  
 AM Radio Receivers  
 Radio/TV Servicing  
 Colour Television

ALA/ST5047/EA584





# Letters to the editor

## More praise for the serviceman

We too would like to thank the Serviceman for the odd tip that comes along. For us it was a Toshiba C2022 series. There is no doubt about it; whoever he is he's a clever so and so.

This brings me to the latest tale (March '84). I felt the point the serviceman brings up is more obvious in a small town where, after some five years in business, one gets to know just about every piece of equipment in existence for twenty miles around. Whether it be on/off volume controls on portable colour TV sets or cassette belts or HF transceivers, for the most part faults come in batches of up to five or six. Over the years it has become known as "knob", "belt", "audio IC" or "tranny" week etc.

We have had at regular intervals up to ten cassette radios with scrambled

volume controls — all various models and ages, which I feel disproves the "faulty batch" theory. I have it from a reliable source that it is caused by astrological influences, which after all is as good an explanation as any. Or maybe there is such a thing as electronic biorhythms!

Nevertheless it is strange, as the consistent problem is welcome, proving if nothing else that the mysterious ways of the planets favour the serviceman.

Please do not change the style of your magazine. A book full of glossy advertising does not make for interesting reading.

M. Bortella,  
Service Manager,  
Hydra Electronic Services, WA.

## No levy on blank audio tapes

If the record companies and their distribution networks are really concerned about illicit copying of their "album" recordings, they should take a good listen to the material that is released on prerecorded cassette tape. What a dismal, below standard product is on offer to the public (Dolby NR doesn't seem to help either). And consider that the tapes are available at usually the same price as the record. This must represent a lucrative part of their turnover.

The conscious tape (copy) enthusiast can buy quantity (10s and 20s) top-quality blank 90 minute tapes for \$5.00. The recording

companies should be able to bulk buy top quality tapes, of 45 to 50 minutes duration, for less than half that price. And they can still reproduce dozens of them in a matter of a few minutes. Add to that the ease of storing and transporting, no buckling problems and surface damage, and no expensive multi-coloured glossy covers and sleeves.

No, I am with you Mr Editor, no levy on blank audio tapes.

Thank you for a thoroughly enjoyable magazine.

E. Van Rayvac,  
Seacombe Heights, SA.

## Software for the Super-80 Computer

The programs are:

Poker Machine Simulation  
Calendar Calculator  
Othello Game  
Investment Analysis  
Guessing Game  
List and Sort  
Fred The Shrink  
Simple Maths Drill

Lotto Number Selector  
Triangle Solutions  
Mortar Attack Game  
Caves & Monsters  
Amateur Q Code Tutorial  
Directory For Caravan Parks  
Super-Pokey Game  
Tattsлото Numbers

**Note:** this book is exclusive to, and available only from, Electronics Australia, 57 Regent St, Chippendale 2008, PRICE: \$4 or by mail: Send Money Order or Cheque to Electronics Australia, PO Box 163, Chippendale, NSW 2008. PRICE: \$5.

## Op Amps praised — but with a gripe

I am writing to comment on the article "Op Amps Explained", by Bryan Maher, in the March 1984 issue of "Electronics Australia". This is a well presented article, particularly in that, early in the piece, it shows that the principles originate in, and are readily applied to, things other than electronics.

This is a refreshing approach and it helps to show that electronics is only a part of the whole system of things, and not an entity in itself. I can only hope that this approach will be maintained in future articles. Unfortunately, the rule seems to be that, once the newness has worn off, the style changes and the script becomes less enjoyable to read.

One point that I hope will be tackled in future issues is that of split supply rails. They are a darn nuisance. I would like to know how they came about and why they are necessary.

I also have a gripe about something that occurs frequently in electronics magazines. It is that the diagrams and illustrations are rarely in the right place. This is disastrous in an article of this nature because, as the reading gets heavy, one has to concentrate carefully and then find that you have to flip back a page or two to look at a specific diagram. Most of the time both the script and the relative diagram are complex and would be better on the same page.

C. Serreyn,  
Whyalla, SA

## Compact digital discs

I read in March EA the letter "Compact disc and quality control". I, likewise, was one of the very first purchasers of a Sony CDP101. There is a lot wrong with compact discs which could easily be dealt with in the early stages by consumer consensus. I have discovered two major faults not commented on.

Firstly, hiss and tape joins (?). The hiss at the beginning of Beethoven's Violin Concerto (Kremer-Marriner) is disgusting and the Zamfir Pan Flute recording has about a 2Hz excursion that is frightening during the half second it is on.

Secondly, many compact discs have only half the program material on them that they could have. Considering the high price of the discs, I feel that we are being ripped off. You really need to listen to and look at your discs before you buy them. If the disc is faulty and/or not fully recorded then make sure that it does not sell. If we accept rubbish, that's what we will be offered.

V. Marcollo,  
Traralgon, Vic.



# WHAT'S NEW AT ROD IRVING ELECTRONICS

Ritron 11 Monitors are now available to increase our range of Data Displays. They feature a unique adjustable swivel base that tilts forward or back 30 degrees and swivels right to left 60 degrees. Technical specifications are listed below:

**SPECIFICATIONS — CRT SIZE:** 12 inches non-glare 90 degree deflection. **INPUT SIGNAL:** 1.0-2.5V p-p composite video signal. **INPUT IMPEDANCE:** Normal 75ohm, high approx 50K ohm. **INPUT TERMINALS:** RCA phone jack. **RISE TIME AND FALL TIME:** Less than 25 us. **VIDEO BANDWIDTH:** 20 MHz  $\pm$  3dB. **SCANNING FREQUENCY:** Horizontal, 15.75KHz  $\pm$  0.5KHz; Vertical, 50Hz/60Hz; Horizontal Retrace Time, Approx 8.5us; Vertical Retrace Time, Approx 800us. **PHOSPHORS AVAILABLE:** Amber, Green. **RESOLUTION:** Centre, 1000 Lines; Corner, 800 Lines; Geometric distortion, 2% or less; Linearity, less than 2%. **CONTROLS:** Front, POWER ON/OFF, brightness contrast; Rear, V-Hold, H-Hold, V-Line, V-Size.



**AVAILABILITY:** Green Phosphor in Stock **\$189.00**  
Amber Phosphor Early March **\$199.00**  
**SCHOOL AND DEALER ENQUIRIES WELCOME**

## APPLE™ COMPATIBLE DISK DRIVE SPECIFICATIONS

TM  
Registered trade mark  
Apple Corporation

**\$365.00**

**HIGH-SPEED ACCESS, HIGH ACCURACY POSITIONING** Instead of plastic CAM positioner or lead screws positioner, a high microprecision metal band positioner is adopted in the mechanism to position the head.

**BRUSHLESS DC DIRECT-DRIVE MOTOR** Direct drive means that there is no improper belt seating, so the variations in speed and friction-producing side loading can be eliminated, which allows motor running lifetime to be over 10,000 hours.

**MOTOR CLOSED LOOP SERVO** Hall effect devices are utilized as speed control sensor in DC motor system, so motor can run stably and accurately.


**SLIM, HALF-HEIGHT DRIVE** The disk drive is only 41mm high, it is only half the size of conventional models.

**NO CONTACT WRITE-PROTECTED SENSOR** Photo coupler is used as write-protected sensor. It means no damage, long lifetime and good reliability for disk media.

### GENERAL SPECIFICATIONS

Capacity (formatted) 163K (20K bytes more than the original)  
No. of tracks 40 tracks (5 tracks more)  
No. of sectors track 13 to 16 sectors.  
Disk rotation speed 300 rpm  
Track density 48TPI  
Track to track time Less than 6 msec

**INCLUDES  
CONTROLLER  
CARD**

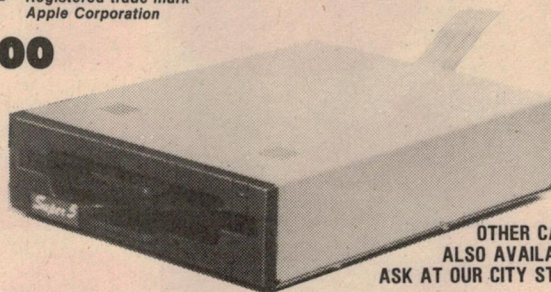

**OTHER CARDS  
ALSO AVAILABLE.  
ASK AT OUR CITY STORE.**

## DO YOU NEED A CASE FOR A SINGLE BOARD COMPUTER

This stylistic low profile case will give your system the professional look it needs. This case comes complete with an encoded, parallel output keyboard. The keyboard is in its own case attached via a coiled connector, so it can be placed for maximum comfort. Sit one of our new swivel monitors on top and make your system look like it's worth thousands. Cut outs are for 2 x 5 1/4 in Slimline disk drives.

**GREAT FOR SINGLE BOARD COMPUTERS, TERMINAL CARDS, ETC.**

### CASE AND ENCODER KEYBOARD \$249.00


Tax Ex \$199.00

Dimensions:

	W	D	H
Box	450mm	295mm	110mm
Box Cat. No.	X11080		

Dimensions:

	W	D	H
Keyboard	450mm	195mm	40 (28mm)
K/B Cat. No.	X11081		



ERRORS AND OMISSIONS EXCEPTED


### NEW VIDEO MONITORS

**Get a clear honest image!**

Computer data and graphic displays never looked better, brighter, sharper

#### High Resolution

- Recommended Display Characters: 1920 (80x24).



**GUARANTEED  
for 12 months  
by  
Rod Irving**

**SCHOOL AND CLUB BULK BUYS —  
Please ring for pricing**

- High quality non-glare CRT
- Compact and Lightweight with all Controls Inside Front Panel
- All units 100% Factory Burned in
- 800 lines centre resolution
- Suitable for Apple\* — and other computers. (Apple is a registered trademark of Apple Computer Company Inc)
- Green or Orange Phosphor available
- 18MHz
- First shipment arriving middle of June, 1983
- Direct Import Price for June

Green Phosphor **\$179** (\$152 (Exempt))  
Orange Phosphor **\$189** (\$159 Exempt)

### GREAT VALUE

## ROD IRVING ELECTRONICS

425 High St., Northcote, Vic. 48-50 A'Beckett St., Melb., Vic.  
Phone (03) 489 8866, (03) 489 8131, Mail Order Hotline (03) 481 1436  
Mail orders to P.O. Box 235 Northcote 3070 Vic.

## 'THE PRINTER PEOPLE' SPECIALS

**AS REVIEWED BY EA NOVEMBER '83**

**THESE ARE THE REAL THING.  
NOT A CHEAP SUBSTITUTE.**

### A NEW PRINTER NOW! CP-80/I, 80-COLUMN IMPACT PRINTER

#### SPECIFICATIONS

##### Functional Specifications

Printing method — Serial impact dot matrix. Printing format — Alpha-numeric — 7 x 8 in 8 x 9 dot matrix field. Semi-graphic (character graphic) — 7 x 8 dot matrix. Bit image graphic — Vertical 8 dots parallel horizontal 640 dots serial line.

Character size — 21mm (0.083")-W x 2.4mm (0.09")-H 7 x 8 dot matrix.

Character set — 228 ASCII characters. Normal and italic alpha-numeric fonts, symbols and semi-graphics.

Printing speed — 80 CPS 640 dots/lines per second.

Line feed time — approximately 200 msec at 4.23mm (1/6") line feed.

Printing direction — Normal — Bidirectional logic seeking. Superscript and bit image graphics — Unidirectional left to right.

Dot graphic intensity — Normal — 640 dots 190.5mm (7.5") line horizontal. Compressed characters — 1.280 dots/190.5mm (7.5in) line horizontal. Line spacing — Normal — 4.23mm (1/6"). Programmable in increments of 0.35mm (1/72") and 0.118mm (1/216").

Columns/line — Normal size — 80 columns. Double width — 40 columns. Compressed print — 142 columns. Compressed double width — 71 columns. The above can be mixed in a line.

Paper feed — Adjustable sprocket feed and friction feed.

Paper type — Fanfold Single sheet. Thickness — 0.05mm (0.002") to 0.25mm (0.01"). Paper width — 101.6mm (4") to 254mm (10").

Number of copies — Original plus 3 copies by normal thickness paper.


##### Mechanical Specifications

Ribbon — Cartridge ribbon (exclusive use), black.

MTBF — 5 million lines (excluding print head life).

Print head life — Approximately 30 million characters (replaceable).

Dimensions — 377mm (14.8")-W x 295mm (11.6")-D 125mm (4.9")-H incl sprocket cover.

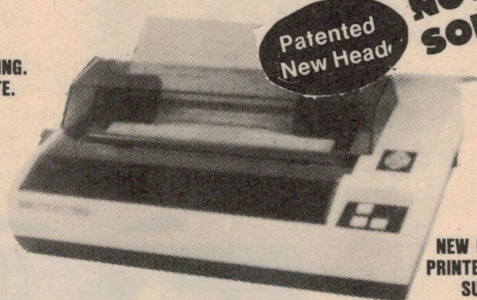

**NEW DELUXE  
PRINTER NOW  
SUPPLIED**

**500  
NOW  
SOLD**

**Parallel CP 80**

**\$399**

**Serial CP80**

**\$559**

**2000 Sheets "Keen Edge" Paper \$39.50**

Minimum P & P \$3.00. Errors & omissions excepted.  
Please address tax exempt, school, wholesale and dealer enquiries

### RITRONICS WHOLESALE

1st floor 425 High St. Northcote 3070 (03) 489 7099 (03) 481 1923  
Telex AA 38897

**DEALER ENQUIRIES ESPECIALLY WELCOME ON ALL THESE PRODUCTS**



# ONLY \$699!



**GET  
YOUR  
FREE**  
Computer  
Information pack

Name \_\_\_\_\_  
Address \_\_\_\_\_

P/Code \_\_\_\_\_

Post to: Dick Smith Electronics  
PO Box 321 North Ryde NSW 2113 or call  
into your nearest Dick Smith Electronics Centre.

## Our CAT eats Apples!



# More powerful than an expanded Apple IIe plus compatibility—for less than half the cost!

Comparison: Dick Smith CAT vs Apple IIe

FEATURE	CAT	Apple IIe
Processor	6502A	6502
Operating clock speed	2 MHz	1 MHz
RAM memory inbuilt	64K	64K
Maximum RAM possible	192K	128K
ROM memory inbuilt	32K	16K
Enhanced Microsoft BASIC?	YES	NO
Size of BASIC interpreter in ROM	24K	10K
Keyboard — number of keys	81	63
Numeric keypad	YES	NO
Function keys inbuilt	8	2
80-column text display inbuilt	YES	NO

The CAT is a trademark of Dick Smith Electronics

FEATURE	CAT	Apple IIe
RGB colour output as standard	YES	NO
280x192 graphics: number of colours	8	6
560x192 graphics in colour	YES	NO
Sound channels	4	1
Disk drive capacity	140K	140K
Centronics type printer port inbuilt	YES	NO
Separate processor for keyboard	YES	NO
ROM cartridge slot	YES	NO
Cost of computer with 80-column text facility, RGB colour & printer port, floppy disk drive, controller & DOS and hi-res green screen monitor	\$1485	\$3170#

# Average of quoted prices



Basic CAT Computer X-7500	\$699.00
Disk Drive X-7505	\$349.00
Disk Controller X-7510	\$149.00
Emulator Cartridge X-7530	\$ 99.00
Dual Joysticks X-7520	\$ 34.50
RF Modulator X-7550	\$ 34.90
RS-232C Serial Adaptor X-7515	\$129.00
Printer Cable (Centronics) X-7540	\$ 39.00
Filer utilities Disk with DOS & Manual X-7512	\$ 39.00
High resolution RGB Monitor X-1193	\$599.00

## DICK SMITH ELECTRONICS

See page 98 for full address details.





## REVIEWS OF RECENT

# Records & Tapes

CLASSICAL • POPULAR • SPECIAL INTEREST



### TWO-PIANO RECITAL

**Rachmaninoff. Suite No. 2, Op 17. Ravel. La Valse. Lutos Lawsky – Variations on a theme by Paganini. Duo Pianists Martha Argerich and Nelson Freiere. Philips digital disc 651 4369.**

The cover of this unusual disc shows the two artists in a pose that suggests they're getting ready for a first class brawl. In a way this reflects their style on the record inside. The players often seem to be competing with each other as to who can produce the greatest number of notes in the shortest time.

The waltz – the second item in the Rachmaninoff Suite – produces a torrent of notes that completely destroys any idea of ballroom procedure. All that suggests the well-respected form is 3/4 time taken at a speed that outlaws any tendency. Indeed it all sounds a bit pugnacious, except for a brief tune.

The next piece – a Romance – is all a bit reverberant and attention should be paid to primary adjustment of controls to get best effect. Here there are moments of great charm except when one piano seems to be trying to outdo the other with cascades of notes.

The concluding Tarentella offers another torrential outpouring of notes. Everything seems to be going too fast – a fault it shares with much of the rest of the Suite. The abrupt ending seems to leave everything up in the air. Also the blank space left over on both sides of the disc suggests more music could have easily been added.

I prefer the gorgeous orchestral version

of Ravel's La Valse. In its two-piano form here there seem to be far too many notes. There are also some Chopinesque rubatos here and there that are alien to the text, glissandos skate up and down the keyboards and there is again a sense of urgent hurry. There are spots where the melody gets entirely lost under the weight of the accompaniment.

The recital ends with a short set of Variations by Lutoslawski. There is an amusing statement of the Theme which is in nursery rhyme form and the brief rest goes very well indeed. The disc's chief interest, I venture to add, will be in its curiosity. (J.R.)



### STRAUSS

**Ein Heldenleben. Tone Poem. New York Philharmonic Orchestra conducted by Zubin Mehta, Glenn Dicterow (violin). CBS Digital Disc. D 377 56.**

A couple of issues ago I reviewed another recording of Heldenleben. That was analog and this is digital and there is little to choose between the two. Perhaps the strings sound a little fuller in the previous version. But not long after the opening the complex bit of scoring seems directionless. To balance this, the ensuing "critics" bit sounds beautifully clear – and spiteful.

It is clear from the start that Mehta has the measure of Strauss at his tallest – if not greatest. Listening to a second reading so soon after the first exposes the inflationary tendency of the piece. In the first place Strauss obviously casts himself in the hero's role, a quite characteristic gesture. Next, after the

second hearing, the piece seems much too long.

But despite the close count of merits in both readings, Mehta's reading is a trifle more humanised than his rival's. This difference stands out in their different treatments of the love passages where Mehta gets a surge on the male part of the narrative that is absent in his competitor's performance. Both solo violinists are fine as the garrulous, skittish wife though Mehta's tone is a trifle more modest than Osawa's full-voiced version. The technique of both in these difficult passages is dazzling for orchestral players.

Mehta wins on the heroic and romantic angle and his battle scene emerges a bit clearer. In both, Strauss emerges victor in an ennobled version of the first subject. Here is Strauss at his tallest, fast dwindling in size as he contemplates the rapid earlier incidents in his life in the "fruits of peace" section, some of it William Tellised on the cor anglais.

As I stated at the outset there is little to choose between the two recordings and I'll leave the ultimate choice to you. (J.R.)

### RIMSKY-KORSAKOFF

**Capriccio Espagnol. May Night Overture. Suite from Sadko. Suite from Snowmaiden. Philips digital disc. 6514 306.**

The size of the type used on the cover for the Capriccio is likely to make one overlook the three other mellifluous Rimsky pieces also recorded on this disc. The Capriccio is festively recorded, the digital process adding clarity at the expense of bloom to the exquisite scoring.

Zinman's handling of the opening Alborado is a little heavy-handed for a dawn serenade, more likely to infuriate the neighbours than to charm a beloved. But the rest of the movements go well enough, even brilliantly. It is unfortunate that the introduction to the main gipsy part, a passage notable for its original rhythmic layout, is quiet enough to be inaudible. This is such an original piece of scoring that it is a pity it is lost.

But the rest of this invigorating movement goes along scintillatingly with just the right carefree spirit.

The overture to the opera May Night is



still more responsive to digital treatment. Its many changes of mood and tempos are scrupulously observed. The whole is a brilliant parody of Glinka. In the suite from the opera *Sadko* the underwater bits are fine but the sound grows a bit confusing in the fortissimos.

The Dance of the Birds from the opera *The Snowmaiden* is great fun and I am happy to add that the women sing to suit Western ears and without the usual rasping tone of Eastern European women's voices. This piece also parodies Glinka. The Dance of the Clowns comes off very well. Altogether a nice relaxing record to listen to. (J.R.)

## D'INDY-FRANCK-FAURE

**D'INDY:** *Symphony for orchestra and piano on a French Mountaineer's song.*  
**FRANCK:** *Symphonic Variations for Piano and Orchestra.*

**FAURE:** *Ballade for Piano and Orchestra.*  
 Philippe Entremont (piano) and the Philharmonia Orchestra conducted by Charles Dutoit.  
 CBS Analog Disc CX74192.

Here is a coupling of good pieces marred by indifferent recording. The early part of the D'Indy is very congested and reverberant. Entremont plays very well indeed without fuss or false expression. But the background is foggy with much distortion.

The balance also is all to blazes. It is an example of analog at its worst.

On the second side the Franck Variations is just as bad. Reverberation hangs over it like a thick fog. It is difficult to imagine how it got out to the public. And the Faure Ballade is no better.


What can be heard of the Philharmonia under Charles Dutoit is very much to their credit. Here is one I cannot recommend. (J.R.)

## SUPER-CUT 1812

**Tchaikovsky:** 1812 Overture; Capriccio Italien; "Cossack Dance" from *Mazeppa*. Played by the Cincinnati Symphony Orchestra conducted by Erich Kunzel. Telarc LP DGQR-10041 limited edition UHQR "Super-cut".

I would hesitate to repeat what has already been said about this recording, the most recent discussion being in "Forum" for January. It should be sufficient to confirm that this is the famous — or notorious — performance of the "1812" into which Telarc engineers mixed the sound of separately recorded carillon bells, plus 16 thunderous shots from period cannon.


What distinguishes this version is that it is a "limited edition UHQR super-cut" LP

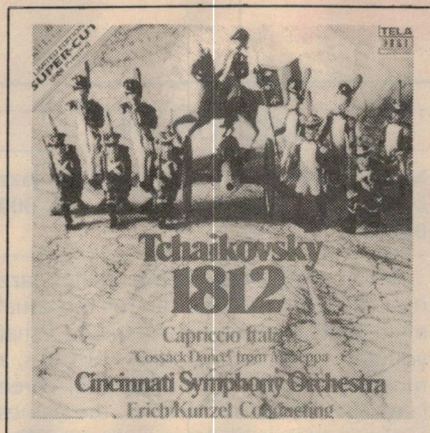

pressing, issued for ultra-enthusiasts and collectors.

UHQR stands for Ultra-High-Performance-Quality Recording, produced by the Victor Company of Japan on special quality super vinyl. The pressings are much thicker, heavier and flatter than normal, with superior electrical performance and more resistant to wear.

While intended to be ultimate examples of phono record technology, discs like this are reportedly treated overseas like rare stamps or rare coins, changing hands for hundreds of dollars. Whether the same applies here I wouldn't know but the fact is that a few copies of the "1812" supercut are still available here — probably the remaining few in the world. If you have around \$100 to spare and you want one, get in touch with PC Stereo Pty Ltd, PO Box 272, Mt Gravatt, Qld 4122. (W.N.W.)

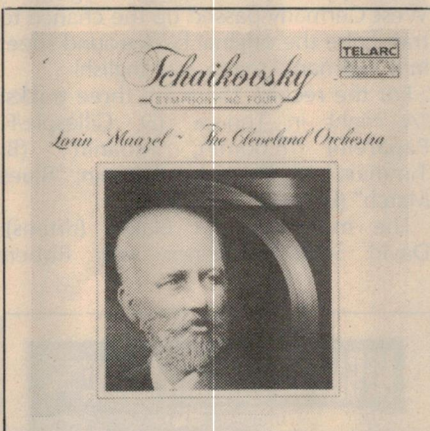

## TCHAIKOVSKY

**Symphony No. 4 in F minor, Op 36.** Played by the Cleveland Orchestra conducted by Lorin Maazel. Telarc compact disc CD-80047. (From PC Stereo Pty Ltd, PO Box 272, Mt Gravatt, Qld 4122.)

Recorded in May, 1979, in the Masonic Auditorium, Cleveland USA, this is one

of the recordings which helped focus the audiophile spotlight on Telarc and on engineer Jack Renner's approach: three Schoeps microphones, no "spotlighting" or monitoring during the performance, transformerless preamps and Soundstream digital tape mastering.

First issued in an audiophile LP version, the recording won high praise from the outset for its technical quality but, commercially, it faced the problem of having to sell at a higher price against a number of major-company releases. Since then, however, it has been established and accepted in its own right.

Available now on a Matsushita-made compact disc, the merits of the original recording are further highlighted. In complete contrast to the uninspiring jacket design, the opening stanza of the first movement, *Andante Sostenuto*, is rich in sonic colour with bass, treble, overtones and acoustic ambience a promise of things to come.

In fact, if you want a quick sampling of the sound texture and the dynamic range, it is necessary only to push the Play/Next pad three more times and listen for a minute or so to the start of the remaining movements: *Andantino*; *Scherzo (Pizzicato ostinato)*; *Finale* — this, without readjusting the volume control. My tip is that you'll want to hear more, so be warned!

The booklet which comes with the recording contains biographical notes on the composer and his own observations about the motivation for the composition — observations which may have been somewhat tongue-in-cheek. That is by the way, however. If you're in the market for an audiophile version of the Tchaikovsky Fourth, this one is well worth considering. (W.N.W.)

## SCHUMANN, LISZT

**Fantasia in C, Op 17 (Schumann).** **Rhapsody Espagnole (Liszt).** Song transcriptions of Schubert and Schumann (Liszt). Nina Lechuk, piano. Digitally mastered LP album. Telarc DG-10075. [From PC Stereo Pty Ltd, PO Box 272, Mt Gravatt, Qld 4022 Phone (07) 343 1612.]

Brilliant as a child musician, Nina Lechuk was admitted to the Moscow Conservatory at 13 — four years before the normal age for admission — and, after eight years of training, graduated with a doctorate in 1965. Even before then, she had attracted the attention of conductor Charles Munch in a Paris competition and won high praise in the Van Cliburn competition in Fort Worth, Texas.

However, while she performed freely in the Soviet bloc countries she had little



# Records & Tapes



opportunity to record and remained relatively unknown in the West. Her fellow graduate Vladimir Ashkenazy moved to America in 1963 but it was not until many years later that Nina Lechuk followed suit, making her debut as a US citizen in Carnegie Hall in October 1980. What we have here is her first American recording, made in April 1982, in Houghton Chapel, Wellesley College, Massachusetts.

Schumann's Fantasia in C, composed and published in the period 1836-39 and dedicated to Liszt, comprises three movements. The first (13' 52") is passionately phrased, the second (7' 16") moderate but energetic and the third (11' 04") gentle by comparison. The recording is impeccable, both musically and technically.

However, Liszt's Rhapsodie Espagnole (12' 35") which opens side two, provides the sonic spectacle of the 58-minute performance. With a soloist of lesser ability, and a recording system of lesser merit, the sparkling cascade of notes which mimic the Spanish sound would simply be a blur. But there is no blur here; the notes cascade from the Steinway like handfuls of coloured beads.

In sharp contrast to Rhapsodie Espagnole, Nina Lechuk then indulges her propensity for making the piano sing, with transcriptions from Lieder: Track 2 from "Der Muller und der Bach" Schubert/Liszt (5' 50"); track 3 "Aufenthalt" Schubert/Liszt (3' 32"); track 4 "Widmung" Schumann/Liszt (4' 16").

Played gently, sensitively yet purposefully, these short items will beguile and relax, rounding off a very commendable introductory album.

As far as the recording itself is concerned, there is not the slightest suggestion of noise, distortion or overload to mar the excellent sound. (W.N.W.)

## JAZZ ON CD

**Night in Tunisia. Art Blakey and the Jazz Messengers. Philips compact disc 800 064-2.**

Those who invest in this Philips jazz recording will look in vain for the usual multi-page information booklet. What you get is a cover with a few pictures, a run-down of the CD system in three languages, a list of the titles, the names of the musicians and production credits. That's all.

In fact, the recording was made in the Victor studios in Tokyo on February 12, 1979 — and it must have been quite a day. Art Blakey and his Jazz Messengers were involved in two complete and separate sessions, one for a direct-cut disc recording, and the other for a digital master tape.

In due course, both versions were issued in Japan on the Philips label: "Direct Session" (RJD-4) and "Digital Session" (RJ-7483). The titles, names and credits on the respective back covers were in English but the information sheet inside was in Japanese. They were imported into Australia in that form and released by MR Acoustics of Annerley, Qld, during 1981.

The CD version, now being distributed through Philips, is from the same master as the "Digital Session" LP, and the names, titles and credits are as given on the LP jacket. Presumably, Polygram in West Germany passed up the chance to transcribe the original background sheet into German, French and English!


For the record, there are three tracks: "A Night in Tunisia" (D. Gillespie/F. Paparelli) 18.00min; "Moanin'" (B. Timmins/J. C. Henricks) 9.41min; "Blues March" (B. Golson) 6.37min.

The musicians: Art Blakey (drums); David Schnitter (tenor sax); Robert

Watson (alto sax); Valery Ponomarev (trumpet); James Williams (piano); Dennis Irwin (bass). They turn on 34 minutes of free-wheeling jazz, which should appeal to devotees of the style.

Technically, the sound quality on the compact disc is fine, as it was on the other two versions, in their day. More than that I am not prepared to say. Busy jazz like this does not expose the noise floor to any extent, nor does it challenge the full dynamic range. As for the texture of the sound recorded, who can say what is the correct amount of "shimmer" on a top-hat or "edge" to an overblown trumpet?

Let's just say that, if you're into Art Blakey's kind of jazz, it will be brought to you faithfully by this new CD version. (W.N.W.)

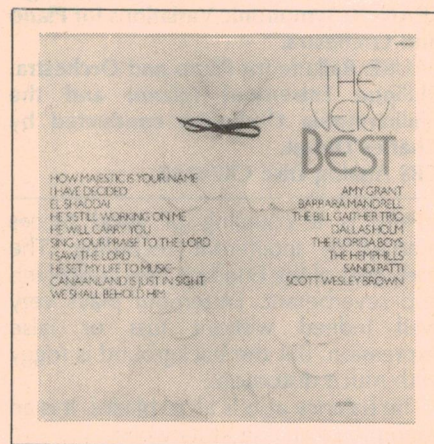


## TOP GOSPEL SONGS

**The Very Best: The top ten songs of 1982. Word stereo LP, WSB-8909. [From Word Records Aust, 18-26 Canterbury Rd, Heathmont, Vic 3135. Phone (03) 729 3777].**

Each year, the Gospel Music Association, based in Nashville, Tennessee, USA, polls its members to select the ten best Gospel songs for the year. Grouped on this album are the songs selected for 1982.

The impact of the album is rather like that of a sampler disc, with different artists and different styles providing a variety that will please some and irritate others. The songs are relatively new, of course, again with the same potential: appealing to the "now" generation but not to those who are convinced that they don't write 'em anymore like they used to!

Without buying into that one, I list the track titles and artists: How Majestic is Your Name (Sandi Patti); I Have Decided (Bill Gaither Trio); El-Shaddai (Amy Grant); He's Still Working On Me (The Hemphills); He Will Carry You (Scott

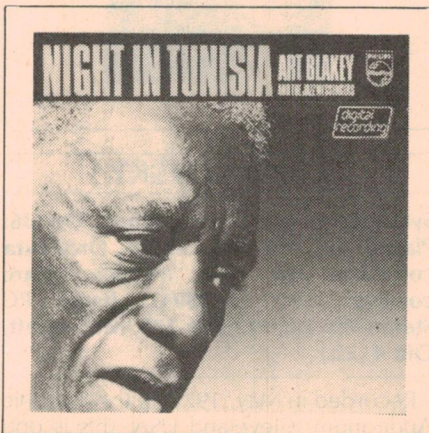




Wesley Brown); Sing Your Praise to the Lord (Amy Grant); I Saw the Lord (Dallas Holm); He Set My Life to Music (Barbara Mandrell); Canaanland is Just in Sight (Florida Boys); We Shall Behold Him (Sandi Patti).

With artists of that calibre and backing, it is scarcely necessary to add that the performances are first-rate in their own category — from soft rock, through rhythm to theme solos.

Unfortunately, I was less than impressed by the technical quality of the disc. While the response was wide, and the noise background low, there was a distinct tendency to "edginess" on high level signals in the middle register. It may well pass unnoticed by some listeners on some systems but it's scarcely a disc that I could commend to hifi buffs. (W.N.W.)

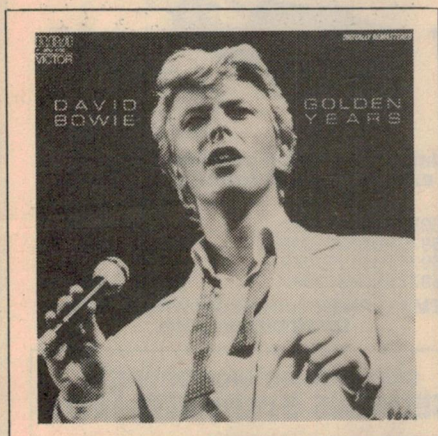


### DIGITAL RE-MAKE

**David Bowie: Golden Years. Digitally re-mastered stereo LP. RCA APLI-4792.**

The endorsement "digitally re-mastered" can mean something or nothing, depending on the stage at which the source material has been digitally encoded. If digital copies have been made from the original analog masters, the ultimate quality can be excellent, with little of the distortion and noise build-up that occurs with analog processing.

I would judge that this approach has been adopted for the production of this compilation of David Bowie songs, which spans the decade 1973-83. The quality throughout is both excellent and very even and, if you want to induce premature deafness by playing it at disco level, it will certainly stand that sort of treatment!

For Bowie fans, the track titles are: Fashion — Golden Years — Red Sails — Joe The Lion — Look Back In Anger — Scary Monsters (and Super Creeps) — I Can't Explain — Wild Is The Wind — Ashes to Ashes. The total playing time is just over 36 minutes. (W.N.W.)

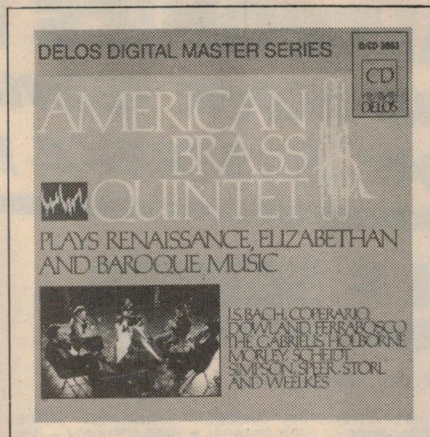

### SOUND OF BRASS

**American Brass Quintet plays Renaissance, Elizabethan and Baroque music. Delos compact disc D/CD 3003. [From P. C. Stereo Pty Ltd, PO Box 272, Mt Gravatt, Qld 4122. Phone (07)343 1612.**

Although this performance dates back to March, 1979, there is no need to discount the recording in any way by reason of its age. It was made in the Masonic Temple Auditorium, New York, well known as a recording venue, using B&K high-SPL condenser microphones and preamplifiers, battery-powered Studer mixer and Soundstream digital tape recorder. It is almost certain that the signal would have been transferred digitally to compact disc via a Studer Sampling Frequency Converter. (Nov '83 issue, p39)


Not surprisingly, what comes through really is the sound of brass — normally involving two trumpets, tenor trombone, bass trombone and French horn, with small D trumpets and cornets as variants. The deeper toned instruments sound particularly full and rich, quite distinct from the incisive trumpets. Indeed, it is this very distinction which so uniquely exposes the structure of the music, particularly when played by a virtuoso group like the American Brass Quintet.

I must concede, however, that some may question the legitimacy of a souped-up brass-spectacular version of music conceived for the instruments and the mood of another era. If the recording is not for you on that account, so be it!

There are 19 tracks in all, averaging a little over two minutes each. They include "Battle Suite" (Scheidt), a selection of English Consort Music and, by way of a complete change, two segments from Bach's "Art of the Fugue". Then follow three German Festive Sonatas, two of Elizabethan Fancies (fantasies) and four of Venetian Baroque.

You can play them all at restricted

volume, if that is your mood but, if you really want to hear "the sound of brass", you need to set the listening level at your ears to what it would be if you were seated in the auditorium. You'll realise, then, that this is a true audiophile recording of a fine performance — legitimate or not! (W.N.W.)

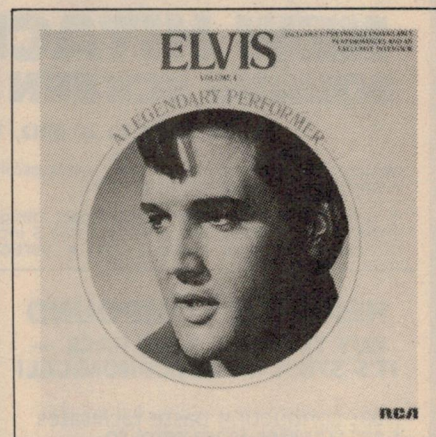

### MORE MEMORABILIA

**Elvis, Volume 4. A Legendary Performer. Mono and stereo LP, RCA, CPL-14848.**

How do you produce yet another album for a seemingly insatiable market, when you've exhausted your supply of source material?

Answer: You search once again through the tape racks, looking for discarded material from recording studios, films, or TV and radio broadcasts.

On side 1 "When It Rains, It Really Pours" is noisy mono from a rehearsal session around 1954; "Interview" (1956) turns out to be a couple of scrappy fragments; "One Night" (1958) is badly distorted mono; "I'm Beginning to Forget You", also distorted, is a control room discard; "Mona Lisa" is marred by distortion and a tentative guitar accompaniment.

I doubt that even fans would relish much more of this sort of thing but the standard improves from there on and through side two. Most of the songs are marked "Unreleased", being previously unused takes from films or unused segments from broadcasts or concerts up to June 1972. The remaining titles:

Wooden Heart — Plantation Rock — The Lady Loves Me — Swing Down Sweet Chariot — That's All Right — Are You Lonesome Tonight? — Reconsider Baby — I'll Remember you.

Playing time is about 34 minutes. The album is endorsed "For collectors everywhere" and that would be a fair description. (W.N.W.)



BANKCARD HOLDERS — PHONE ALTRONICS TOLL FREE 008-999-007 FOR NEXT DAY JETSERVICE DELIVERY

BANKCARD HOLDERS — PHONE ALTRONICS TOLL FREE 008-999-007 FOR NEXT DAY JETSERVICE DELIVERY

# QUALITY ALTRONICS PRODUCTS

\* TOLL FREE PHONE ORDER SERVICE (008 999 007)

\* NEXT DAY JETSERVICE DELIVERY READ ON! ➡


## NEW HITACHI F SERIES SQUARE SCREEN DUAL BEAM CRO

V-212 DC to 20 MHz, 1 mV/div, DUAL-TRACE

We are proud to include Hitachi's latest oscilloscope in our range of test equipment.

It features: • Thin, light and compact design (310W x 130H x 370D mm, 6 kg) • Large 6 inch rectangular, internal graticule CRT • Vertical

mode triggering selection to provide stable triggering of each channel • High accuracy  $\pm 3\%$  • High sensitivity 1mV/div • Stable, low drift design • TV sync separation circuit built-in • Convenient X-Y mode for phase difference measurements • Tilting ball supplied.

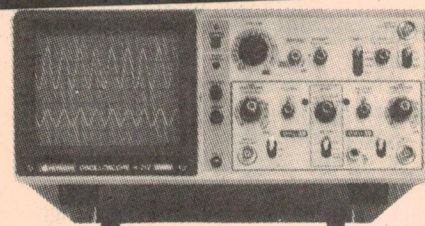

FREE FREIGHT ANYWHERE IN AUSTRALIA

Q0152..... **\$699.00**

## HEATSINK COMPOUND BUY THE BULK 150g PACK — IT'S 378% MORE ECONOMICAL!

Heat conducting paste facilitates heat transfer from semi to Heatsink. One tube good for up to 30 T-03 package semiconductors.

*Fantastic Value*




H1600... 7.5gm Pack... **\$1.80**  
H1610... 150gm Pack... **\$9.50**

## MASSIVE 30 AMP RATED PANEL MOUNT FUSE HOLDER

Remember the hassle in providing high current circuit protection? The options are few — expensive industrial fuse assemblies costing \$10 or more or circuit breakers (costing an arm and a leg). Well here is the answer — our nifty new panel mount fuse holder. **It's like a big, big brother to the 3AG Style.** The 10mm x 38mm fuses are an industry standard of course — naturally though, **ours cost somewhat less than industry standard prices.**

Panel hole size 15/16 inch is perfect although 1 inch or 25mm is OK.

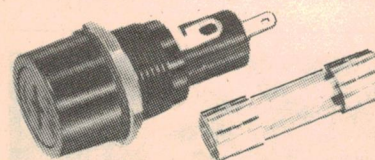


Simple One Hole mounting — no more expensive panel cutouts, brackets.

	each	10 +
S6030 Fuse Holder.....	<b>\$4.50</b>	<b>\$4.10</b>
S5975 Fuse 20 AMP.....	<b>\$1.95</b>	<b>\$1.85</b>
S5976 Fuse 25 AMP.....	<b>\$1.95</b>	<b>\$1.85</b>
S5977 Fuse 30 AMP.....	<b>\$1.95</b>	<b>\$1.85</b>

OEM's — Please contact our Wholesale Dept for wholesale prices.

## DIODES SLASHED

	Were	This Month	100 +
IN4002.....	8c	6c	5c
IN4004.....	10c	8c	7c
IN4007.....	14c	10c	9c



## SUPER BRIGHT HIGH INTENSITY SEIMENS 5mm RED LEDS

WERE 50C  
SAVE A FORTUNE!

CAT	1-9	10-99	100 UP
Z0155.....	<b>22c</b>	<b>19c</b>	<b>15c</b>

## MINI BUZZER 1.5-5V DC

SENSATIONAL LOW PRICE




Handy little solid-state audio "Buzzer" or signalling device. Just the shot for communicator panels, or for timer alarms or in the car. Polarity conscious.

S5062... **\$1.95** 10 Up... **\$1.75**

## SOLDERING IRON STAND

UNIVERSAL TYPE

T1302



**\$5.95**


## VERO TYPE STRIP BOARD

Alpha numeric grid. Pre drilled .9mm, 2.5mm spacing, 95mm wide. 3 handy lengths.



H 0712..... 95 x 152 ONLY **\$2.50**

## HOW'S THIS! CENTRONICS PLUGS



36 WAY  
P0870  
TOP QUALITY  
LONG LIFE CONTACTS  
— GOOD FOR  
THOUSANDS OF  
CONNECTIONS  
ONLY

**\$12.00**

WHY PAY  
\$19.95?

## DC PLUG PACKS AT LAST ... DIRECT IMPORT PRICES ON FULLY APPROVED PLUG PACKS

Great for powering small Micro's, TV Games, Slot Car Sets, etc. Eliminate the need for batteries, when testing or operating new projects.

### M9000

240v AC — 3, 4.5, 6, 7.5, 9,  
12v DC @ 300mA

ONLY..... **\$12.50**

### M9005

240v AC — 6, 9, 12v DC  
@ 500mA

ONLY..... **\$14.95**  
4 OR MORE..... **\$13.50**

Both Plug packs come with Instructions and a 4 way multiplug 1.6m lead.



INSULATED  
TO  
ASC 126





**\* 14 DAY MONEY BACK SATISFACTION GUARANTEE**  
**\* ALL AT DIRECT IMPORT ALTRONIC PRICES**  
**DICK SMITH — EAT YOUR HEART OUT!**

## INSTRUMENT CASES

Our superb instrument cases will give your projects the professional appearance they deserve.

	WAS	NOW	10 +
H0480 .....	\$13.50	\$11.50	\$ 9.50
H0482 .....	\$17.50	\$15.00	\$12.25

OEM's — Manufacturers — Bulk Users. Your product will look like it's straight out of "Hewlett Packard's" factory with these brilliant low cost cases. Contact our Wholesale Department for Bulk Prices.

## KEY OPERATED SWITCH

HALF PRICE! BE QUICK




19.5mm mounting hole required. Supplied with two keys. Hundreds of applications for security type applications.

\$2500 **\$3.50**

### H0480

Size: 200W x 160D x 70H

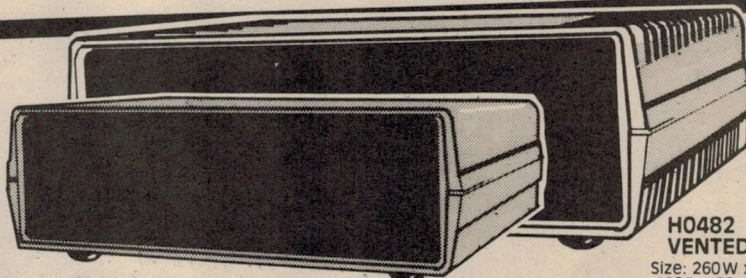

### H0482 VENTED


Size: 260W x 190D x 80H

- \* Internal mounting posts enable a wide combination of PCB's, Transformers, etc. to be accommodated (screws supplied).
- \* Removable front and rear panels. Attractive textured finish one side and plain the reverse side. (Enables direct engraving, silk screen printing etc. to plain side.)

- \* Top and bottom split apart for ease of construction or service. Integral feet included.
- \* Great for test instrument and other high grade projects.
- \* PCB guide rails provided internally allow vertical PCB positioning to several locations.

## LOGIC PROBE

Q1272  
WAS \$29.50

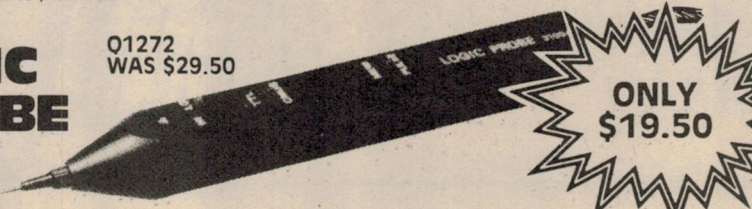

**ONLY \$19.50**

- \* Directly powered from circuit under test (5V) \*
- \* Tested to 12.6 MHz \* DTL/TTL — CMOS Threshold selector \*
- \* Circuit loading 30UA approx. \*
- \* High-Low — pulse or memory led indication. Impulse

mode pulse length is extended to enable visual observation. In memory mode any detected level is continuously displayed until reset.

# ALTRONICS

105 STIRLING ST. PERTH — FOR INSTANT SERVICE

**008 999 007**

TOLL FREE

**(09) 328 1599**

PERTH METRO AREA & AFTER HOURS RECORDED SERVICE

All Mail Orders: Box 8280, Stirling St, Perth, WA 6000.

## ALTRONICS RESELLERS

Please note that resellers may not have all the items advertised in stock, and as resellers have to bear the cost of freight, prices may be slightly higher than advertised. ALTRONICS resellers prices should however represent a considerable saving over our competitors' prices.

WA	VICTORIA	QUEENSLAND	SA	NSW	COFFS HARBOUR
<b>COUNTRY</b> ALBANY BP Electronics. .... 41 2681 <b>ESPERANCE</b> Esperance Communications. .... 71 3344 <b>GERALDTON</b> Geraldton TV and Radio. .... 21 2777 <b>KALGOORLIE</b> Todays Electronics. .... 21 5212 <b>MANDURAH</b> Kentronics. .... 35 3227 <b>WYALKATCHEM</b> D & J Pease. .... 81 1132	<b>CITY</b> All Electronic Components. .... 662 3506 Ellitronics. .... 602 3499 MaGraths Electronics. .... 347 1122 <b>SUBURBAN</b> <b>BENTLEIGH</b> Absolute Electronics. 557 3971 <b>BOX HILL SOUTH</b> Eastern Communications. .... 288 3107 <b>CHELTENHAM</b> Talking Electronics. .... 550 2386 <b>FOOTSCRAY</b> Acron Electronics. .... 689 1911 <b>SOUTH CROYDEN</b> Truscott Electronics. .... 723 3860 <b>COUNTRY</b> <b>BENDIGO</b> Lindrea & Johnson. .... 41 1411 <b>MILDURA</b> Electronic and Digital Services. .... 23 3380 <b>SHEPPARTON</b> GV Electronics. .... 21 8866	<b>CITY</b> Delsound P/L. .... 229 6155 <b>SUBURBAN</b> <b>FORTITUDE VALLEY</b> St. Lucia Electronics. .... 52 3547 <b>PADDINGTON</b> ECO Technics. .... 369 1474 <b>SALISBURY</b> Colourview Wholesale 275 3188 <b>SLACKS CREEK</b> David Hall Electronics. 208 8808 <b>COUNTRY</b> <b>CAIRNS</b> Thompson Instrument Services. .... 51 2404 <b>GLADSTONE</b> Purley Electronics. .... 72 4321 <b>NAMBOUR</b> Nambour Electronics. .... 41 1604 <b>PALM BEACH</b> The Electronics Centre. 34 1248 <b>ROCKHAMPTON</b> Purley Electronics. .... 2 1058 <b>TOOWOOMBA</b> Hunts Electronics. .... 32 9677 <b>TOWNSVILLE</b> Solex. .... 72 2015	<b>CITY</b> Protronics. .... 212 3111 Gerard & Goodman. .... 223 2222 <b>SUBURBAN</b> <b>BRIGHTON</b> Brighton Electronics. .... 296 3531 <b>CHRISTIES BEACH</b> Force Electronics. .... 382 3366 <b>KESWICK</b> Freeway Electric Wholesalers. .... 297 2033 <b>PROSPECT</b> Jensen Electronics. .... 269 4744 <b>REYNELLA</b> Force Electronics. .... 381 2824 <b>TASMANIA</b> <b>CITY</b> D & I Agencies. .... 23 2842 <b>GEORGE HARVEY</b> Hobart. .... 34 2233 Launceston. .... 31 6533	<b>CITY</b> Avek Electronics. .... 267 8777 David Reid Electronics 267 1385 Jaycar. .... 264 6688 Radio Despatch. .... 211 0191 <b>SUBURBAN</b> <b>CARLINGFORD</b> Jaycar. .... 872 4444 <b>CONCORD</b> Jaycar. .... 745 3077 <b>DEE WHY</b> David Ryall Electronics. .... 982 7500 <b>ENFIELD</b> Avek. .... 745 2122 <b>HURSTVILLE</b> Jaycar. .... 570 7000 <b>LEWISHAM</b> PrePak Electronics. .... 569 9770 <b>MATTRAVILLE</b> Creative Electronics. .... 666 4000 <b>COUNTRY</b> <b>ALBURY</b> Webb's Electronics. .... 25 4066 <b>BATHURST</b> Sound of Music. .... 31 4421 <b>BROKEN HILL</b> Crystal TV. .... 4803	<b>Coffs Harbour</b> Electronics. .... 52 5684 <b>GOSFORD</b> Tomorrows Electronics. .... 24 7246 <b>KURRI KURRI</b> Kurri Electronics. .... 37 2141 <b>NEWCASTLE</b> D.G.E. Systems. .... 69 1625 George Brown & Co. .... 69 6399 <b>NOWRA</b> Vincom Electronics. .... 21 4011 <b>PENRITH</b> Acorn Electronics. .... 21 2409 <b>PORT MACQUARIE</b> Hall of Electronics. .... 83 7440 <b>RAYMOND TERRACE</b> Albark Electronics. .... 87 3419 <b>RICHMOND</b> Vector Electronics. .... 78 4277 <b>TAMWORTH</b> Landlink Communications. .... 65 4622 <b>TOUKLEY</b> TES Electronics. .... 96 4144 <b>WINDANG</b> Madjenk Electronics. .... 96 5066 <b>WINDSOR</b> M & E Electronic Communications. .... 77 5935

RESELLERS WANTED IN ALL AREAS (including WA).  
Phone: STEVE WROBLEWSKI (09) 381 7233 for details.

BANKCARD HOLDERS — PHONE ALTRONICS TOLL FREE 008-999-007 FOR NEXT DAY JETSERVICE DELIVERY

BANKCARD HOLDERS — PHONE ALTRONICS TOLL FREE 008-999-007 FOR NEXT DAY JETSERVICE DELIVERY



# Micronews



## Cabinet and keyboard for homebrew computers

The latest in Rod Irving's expanding range of computer products is a stylish case and detached keyboard for single-board computers.

Moulded in white impact-resistant plastic, the two part case measures 45 x 40 x 11cm, with two cut-outs in the front to suit 13cm half-height minifloppy disk drives.

The separate keyboard is 45cm wide and 19cm deep. Height at the rear is 4cm, sloping to 2.5cm at the front, although two wire legs at the rear can be snapped down to increase the slope of the typing surface. The keyboard is serially encoded and connected by a generous length of coiled cable to a DIN socket at the side of the cabinet. A small circuit board in the cabinet converts the serial output of the keyboard to a parallel output, available via a length of ribbon cable and a dual-in-line plug.

The keyboard has 87 keys, including eight special function keys on the left and a numeric keypad on the right. It is modelled after the keyboard of the IBM PC, right down to the extra backslash key between the "Z" and the left-hand shift key (a real bugbear for touch typists, and probably the most criticised point of the PC).

The keys are white with black legends,

and carry labels for single key entry of Basic statements on their front surface. Two keys on either side of the space-bar have holes for miniature LEDs, although these are not installed. These are the latching "shift-lock" key and another marked "power", although it seems an unlikely place for an off/on switch. The key action is smooth and positive and well up to professional standards.

The case is divided into top and bottom sections held together by plastic pillars and sockets tapped to take screws. Inside is the serial to parallel keyboard encoder already mentioned, mounted under a metal shelf which serves to secure the disk drives.

At the rear is an RCA socket for video and two miniature audio sockets for a cassette interface. All sockets are pre-wired, and other metal plates, wires and mounting hardware are supplied for the disk drive mountings, power connection, and miscellaneous connections. Stick-on labels of metallised paper are provided for the video and cassette connectors.

Apparently the case is designed to take single-board computers such as the "Big Board II", and for the price it would be an excellent complement to any homebrew computer system. Cost is \$299 including sales tax, and it is available from Rod Irving Electronics, 425 High Street, Northcote, Vic or 48-50 A'Beckett St, Melbourne. There is also a mail order "hotline" on (03) 481 1436.

## IBM to offer Unix for PC

In a significant move for the microcomputer industry, IBM has announced that it will offer Unix for the IBM PC in an operating system known as "Personal Computer Interactive Executive", or PC/IX.

Features of the PC/IX include a full-screen editor, standard Unix functions including networking, command languages, file monitoring, text processing and programming development tools, a C compiler and multi-tasking capabilities. It runs on the IBM PC-XT with at least 256K of memory and a 10 megabyte hard disk drive.

Unix originated at Bell Labs, the research arm of AT&T, and has an extensive following in universities throughout the world. Various versions are already available for the PC but IBM's announcement of an "official" version is expected to appeal to large users and technical groups.

## Koala TouchTablet simplifies graphics input

The Koala "TouchTablet" is a pressure sensitive pad which converts the movement of a stylus or pointing finger to X and Y co-ordinates which can be read by a computer. Versions are available for the Apple II, Commodore 64 and VIC 20, IBM PC and Atari personal computers.

The Koala Pad has an active area of 120mm square in an attractively styled white plastic case. A stylus is provided and is simply a blunt pointed plastic rod. Pens and biro's are not recommended for use with the pad as sharp points may mar the surface of the pad. Two large buttons above the pad active area are used to select drawing or movement without drawing on the screen.

We were attracted to the Koala pad because it appears to solve a common problem with computer graphics — the initial input of designs — at a fraction of the price of professional quality digitising tablets. We tried the version available for the Commodore 64, in conjunction with a ROM cartridge containing a "KoalaPainter" program.

The KoalaPad plugs straight into the first joystick port of the Commodore 64. With the software cartridge in place the system comes up with a "sign-on" routine with a koala bear nestled among gum trees. Following sign-on, a graphic




## Low cost MicroBee EPROM expander

For those who want the convenience of using two sets of MicroBee EPROM software without the expense of the larger Avtek "Multiprom" board, Avtek Electronics also has a smaller and less expensive add-on, the XM-1 (for early model MicroBees) and the XM-2 (for the MicroBee IC).

The board takes two sets of EPROMs, such as Wordbee and Edasm, and allows the user to choose between them by simple commands from the keyboard. Four EPROM sockets, a 24-pin DIP connector and switching logic are mounted on the board, which connects by a short length of cable and a second DIP connector to the original EPROM sockets inside the MicroBee.

Apart from plugging in the chips and connector only two solder connections need to be made to install the board. The XM-1 board suits early model MicroBees and those using 2532 type

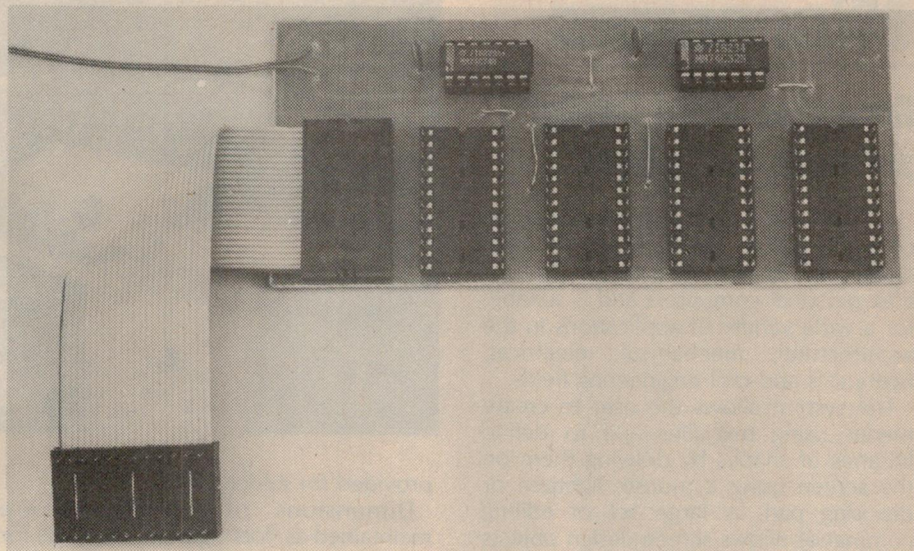

EPROMs (with serial numbers starting with 8). The XM-2 model suits the MicroBee IC and also responds to PAK1 and PAK2 commands. Cost is \$19.95 for the XM-1 and \$16.95 for the XM-2.

For further information contact Avtek Electronics Pty Ltd, 119 York St, Sydney, 2000, (02) 267 8777 or PO Box Q302, Queen Victoria Building, Sydney, NSW, 2000.

menu of options appears on the screen.

Options available include drawing with "brushes" of various sizes and shapes, lines, boxes, circles and solid shapes, a "Fill" command, "Copy" and a command to allow pictures to be stored and read from disk. Selecting an option is a matter of moving a flashing arrow on the screen, using the bit pad and stylus, and then pressing on the surface when the arrow is positioned over the required command.

One feature we particularly liked was the ZOOM command, which allows a selected area of the screen to be magnified by a factor of about 16. The magnified area can then be worked on with whatever command is in current use, and all changes made on a pixel by pixel basis will be transferred automatically to the normal size drawing.

All commands can be active in one of 16 colours or one of a range of patterns. These patterns alternate pixels of two different colours to create tones and apparent textures on the screen. Two independent screens are available for drawing and parts of one picture can be copied into the alternate screen at any time.

The KoalaPad is excellent for freehand doodling and the construction of geometric shapes. Considerable practice is required, however, before the bit pad stylus can be manipulated with total confidence. Part of the problem is the small active area of the pad,

approximately one-quarter the size of a video monitor display. All movements on the pad are amplified by a factor of four on the screen. Some other minor limitations of colour placement are inherent in the Commodore 64, but these only appear in complex drawings.

"KoalaPainter" uses the bit pad well and is an excellent introduction to "computer art", but it will not be the end of the KoalaPad's capabilities. Without any software, the KoalaPad appears to the Commodore 64 as a joystick, and can be used with any program in exactly the same way as the Commodore joysticks. Applications in music, games and data input come to mind immediately, and we suspect that the

KoalaPad will have a long and useful life with any computer enthusiast.

Readers thinking, by the way, that the KoalaPad must be an Australian invention will be surprised to learn that it is in fact manufactured by Koala Technologies Corporation, California, USA.

Price of the KoalaPad is \$149.95 accompanied by "KoalaPainter" software on disk or \$169.95 for the pad with ROM cartridge software. Our review model was kindly supplied by OziSoft Pty Ltd, GPO Box 4475, Sydney, NSW, 2001, who distribute a wide range of software for the VIC 20, Commodore 64 and Sinclair Spectrum computers at their sales office, Suite 33/8-24 Kippax St, Surry Hills, NSW.






# Micronews

## Computer Aided Design software for micros

AUTOCAD is a two dimensional computer-aided design and drafting system which runs on a variety of low-cost personal computers and is suitable for a wide variety of applications in the architectural, mechanical, electrical, hydraulics and civil engineering fields.

The system allows the user to create menus using text files and to define libraries of shapes by drawing them on the screen using a mouse, lightpen or digitising pad. A large set of editing commands allows screen design objects to be moved, copied, modified, erased, rotated or scaled in any combination, while repetitive patterns are created automatically. A zoom facility is

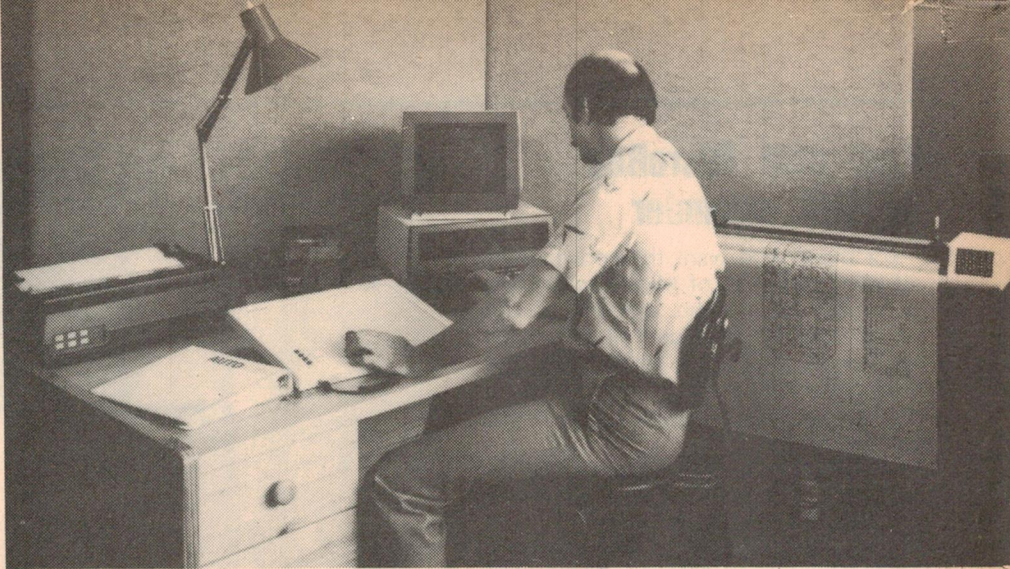

provided for added detail.

Dimensions of all objects are maintained as floating point numbers for accuracy and objects may be aligned or forced to conform to a grid displayed on the screen. Up to 127 layers and colours may be used, allowing selective viewing

or the plotting of drawings as if on transparent overlays. Plotter output is available with a resolution of 0.025mm.

Further information on the AUTOCAD system is available from MCS Microcomputer Systems, 502 Miller St, Cammeray, NSW. Phone (02) 923 1137.

## G-Pascal for the Commodore 64

An advance new programming language for the Commodore 64 is now available from Gambit Games of Victoria. "G-Pascal" is a structured Pascal compiler with additional features to support the graphics, sprites, music and internal timer of the Commodore 64 in games programs.

In all, G-Pascal contains 76 separate extensions to the Pascal language to support the unique features of the Commodore 64 as well as major Pascal constructs.

The language compiler is self-contained so that once it is loaded from disk or cassette it can be used to edit, compile and test programs continuously without further disk or cassette access. A built-in text editor with "find and replace" capability aids program entry and correction, and compilation speed is quoted as 6,000 lines per minute.

Programs can be saved and retrieved from disk or cassette and are stored in a compressed format which allows large programs to be used without adding excessively to storage requirements or loading time. G-Pascal itself occupies 16K of RAM, leaving considerable space for programs and graphics effects.

An 80-page user manual is supplied with the compiler, including a step-by-step guide to getting started and detailed instructions on all graphics and sound effects commands as well as error messages.

Further information is available from Gambit Games, PO Box 124, Ivanhoe, Vic 3079. Phone (03) 497 1283.

## Imagineering special offer to training seminars

Imagineering has announced details of an "education licence agreement" which will allow microcomputer dealers and professional organisations to obtain software for use in training seminars at significantly discounted prices.

The special price allows discounts of up to 90% on software and peripherals for use in training. Software from Visicorp and Micropro

are included as complete packages while other Imagineering products are available at up to 50% off retail.

An application form must be completed for each training course, giving complete details of the course, the product being taught and the name of the instructor etc.

Further information is available from Mr Phil Woolley, Marketing Manager, Imagineering, 759 Harris Street, Ultimo, NSW (02) 212 1411 or in New Zealand from Mr Paul Dixon, Imagineering, 1-3 Arawa Street, Auckland (09) 39 6266.

## Interface problems solved


MicroPro Design has announced the release of a range of communications interfaces to suit all popular microcomputers and covering the configurations most often required when attempting to connect incompatible pieces of computer equipment.

Most of the interfaces are microprocessor-based with LED indication of settings and switch selectable operating modes. Custom

variations are also possible for particular applications.

The range includes IEEE488 to RS232, Centronics to RS232, RS232 to Centronics, RS232 to RS232 buffer and RS232 to 20mA current loop converters, all housed in robust aluminium enclosures and powered from the mains.

Further information is available from MicroPro Design, PO Box 153, North Sydney, NSW, 2060. Phone (02) 438 1055.

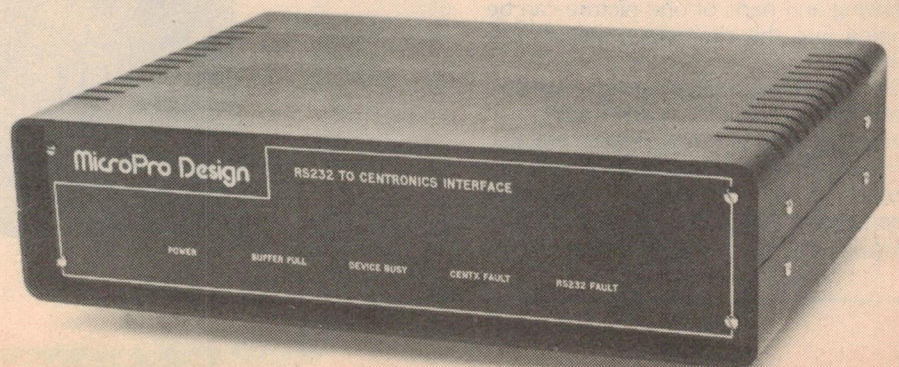



## MODEL 175 AUTORANGING BENCH/PORTABLE DMM

# KEITHLEY INSTRUMENTS



For more information on the Model 175 Autoranging DMM, or on a variety of other industrial electronic testing and measurement equipment, contact:



**SCIENTIFIC DEVICES AUSTRALIA PTY. LTD.**  
VIC. 2 JACKS RD., SOUTH OAKLEIGH, 3167  
PHONE: (03) 579 3622 TELEX: AA 32742  
N.S.W. 559A WILLOUGHBY ROAD, WILLOUGHBY, 2068  
PHONE (02) 95 2064. TELEX AA22978.  
S.A. 31 HALSEY RD., ELIZABETH EAST, 5112  
PHONE: (08) 255 6575 TELEX: AA 88125


The new Model 175 Autoranging Bench Digital Multimeter, from Keithley Instruments, Inc., combines the measurement capabilities of much higher-priced system DMMs with several new features to extend its utility, yet retain simplicity of use. Ideal for use as a bench meter in production or lab work, this 4-1/2 digit autoranging DMM also has a field-installable battery option, making it fully portable. Fast autoranging (up to 200ms per range change on DCV) enables the user to concentrate on getting the reading without worrying about choosing the appropriate range.

The Model 175 features digital calibration for reduced cost of ownership, as many users can now calibrate the meter in-house. With the Model 1753 IEEE-488 (GPIB) option, the 175 is the lowest-priced IEEE-interfaceable DMM available. Model 175's 100-point data logger monitors drifts, determines rates of change, and collects response curve data without a printer, output cables, or complicated hook-ups. The data logger has six different store rates from one reading/400ms to one reading/hour, and data recall is "push-button" easy.

Other features of the Model 175 include:

- 4-1/2 digit LCD display with annunciators for function, range, and feature indication
- 10 $\mu$ V/10m $\Omega$ /10nA sensitivity
- 0.03% basic DCV accuracy
- True RMS AC
- 10A capability
- 100kHz bandwidth in AC
- dBm/relative function
- Relative reference
- Max/Min reading hold
- Safety input jacks
- Front panel accessible amps fuse

## Next month in Electronics Australia\*

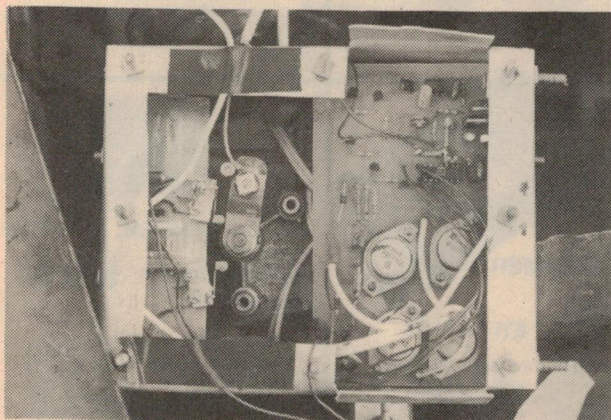


### Cruise control for cars

Commercial cruise controls are available but usually cost around \$200. This do-it-yourself unit can be built for less than half that figure (about \$60) and uses readily available parts.

### Heat controllers

These mains control units are designed for use with electric blankets, vertical grillers, radiators, and in other heat control applications. There are two versions: one featuring manual control and the other thermally controlled.

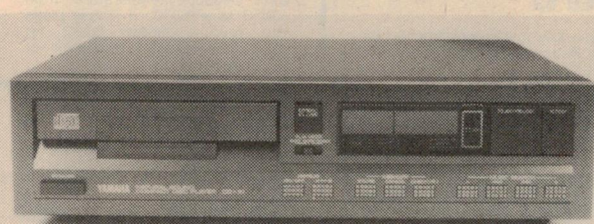

### Yamaha CD-X1 compact disc players

Retailing for just \$599, Yamaha's CD-X1 compact disc player is now the lowest priced model on the market. June "Electronics Australia" features a full review of this interesting newcomer.

### Function Generator enhancement


Did you build the Function Generator described in April 1982? This simple add-on circuit lets it operate as a digital frequency meter and improves the linearity of the coarse frequency control.

\*Although these articles have been prepared for publication, circumstances may change the final content. However, we will make every attempt to include the articles featured here.



## PARABOLIC MICROPHONE

**\$15**




EA NOVEMBER '83

Build a low cost parabola, along with a high gain headphone amplifier to help when listening to those natural activities such as babbling brooks, singing birds or perhaps even more sinister noises. The current cost of components for this project is around \$15 including sales tax, but not the cost of batteries or headphones.


## TV PATTERN GENERATOR

**\$25**



Make sure your TV is up to the mark with this low cost Pattern Generator which uses just seven ICs and gives three patterns: Dot, crosshatch and blank raster. The current cost of parts for this project is approximately \$25 which includes sales tax but not the cost of a modulator or 9V mains plugpack.

EA NOVEMBER '83



**ETI-268 NICAD FLOAT CHARGER**

**\$9.00**

ETI MARCH '83

Keep your NiCad batteries in tip-top condition with this cheap, simple charger.




**ETI-1512 ELECTRIC FENCE TESTER**

**\$24.50**

ETI FEB '83


No more checking the 'feel' of a fence with a blade of grass (and maybe ending on your ...). This project tells you how much your fence energiser delivers and can be used for fault-finding on a fence.



**ETI-1516 MODEL ENGINE IGNITION SYSTEM**

ETI JUNE '83

Get sure starts every time and no more glow plug burnouts on your model engines.




**ETI-163 LAB SUPPLY**

**\$175**

Fully variable 0-40 V current limited 0-5 A supply with both voltage and current metering (two ranges: 0-0.5 A/0-5 A). This employs a conventional series-pass regulator, not a switchmode type with its attendant problems, but dissipation is reduced by a unique relay switching system switching between taps on the transformer secondary.

ETI MAY '83



**ETI-668 MICROBEE EPROM PROGRAMMER**

**\$47.50**

ETI FEB '83

Simple, low cost programmer for the MicroBee can program 2716s, 2732s and 2764s.

**ETI-153 TEMP PROBE**

**\$19.95**

ETI JUNE '83

Can measure temperature from -50°C to +150°C. It simply plugs into your multimeter—great for digital multimeters. Accuracy of 0.1°C resolution of 0.1°C.




**ETI-323 HEADLIGHT DELAY UNIT**

**\$17.50**

ETI MAY '83

Park your car and turn off the lights. Can't see where you're going? Press the button and the headlights come on to light your way, switching off automatically after 50 seconds. This is a simple, easy to build, low cost project.



**ETI-1515 DRILL/BLENDER SPEED CONTROLLER**

**\$27.50**

ETI APRIL '83


This project provides a full range of speed control for appliances having 'universal' ac motors. Once the speed is set, the motor will maintain that speed from no-load to heavy-load. Great for drills, blenders, grinders, etc.



**ETI-162 30 V/1 A FULLY PROTECTED POWER SUPPLY**

**\$47.50**

The last power supply we did was the phenomenally popular ETI-131. This low cost supply features full protection, output variation from 0 V to 30 V and selectable current limit. Both voltage and current metering is provided.



**ETI-654 APPLE II ANALOGUE/DIGITAL INTERFACE**

**\$159.00**

ETI MARCH '83

This project will give your Apple a set of 8-bit digital inputs and outputs plus one analogue input and one analogue output. Applications include: driving a robot, recording science experiment results, etc. (digital only shown).



**ETI-688 BIPOLAR PROM PROGRAMMER**

**\$47.50**

ETI JUNE '83

Every digital workshop should have one! Can be used to program the popular fusible-link PROMs like the 74S188/288, 82S23 and 82S123 etc.




**ETI-461 GENERAL PURPOSE BALANCED INPUT PREAMP**

**\$20.00**

ETI DEC '83

This project can be used as a balanced mic amp, with low impedance input, a low or high impedance input differential amplifier or a balanced input instrumentation amplifier.



**ETI-164 ZENER TESTER**

**\$9.50**

ETI MAY '83

A simple, low cost add-on for your multimeter. This checks zeners and reads out the zener voltage directly on your multimeter. It can also check LEDs and ordinary diodes.




**ETI-334 AUTO TESTER**

**\$17.00**

ETI JAN '83

Just the thing to keep in the glovebox or toolkit to find those nasty electrical bugaboos that occur at awkward times. Simple to build, simple to use.




**ETI-335 PUSHBUTTON-PROGRAMMABLE WIPER CONTROLLER**

**\$28.50**

ETI MARCH '83

No more fiddling with knobs and not getting the delay between wipes that you want—this windscreen wiper controller is simply 'programmed' with two pushbuttons to provide the wiping delay you need.



**ETI-733 RADIOTELETYPE CONVERTER FOR THE MICROBEE**


**\$20.00**

ETI APRIL '83

Have your computer print the latest news from the international shortwave news service. Just hook up this project between your shortwave receiver's audio output and the MicroBee's parallel port. A simple bit of software does the decoding. Can be hooked up to other computers too.




## 100's SOLD VIDEO ENHANCER \$35

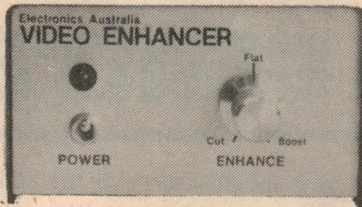

Like tone controls in a hifi amplifier, touch up the signal with this Video Enhancer. EA OCTOBER 83

## 1000's SOLD TRANSISTOR TESTER \$15




EA SEPTEMBER 83

Have you ever desoldered a suspect transistor, only to find that it checks OK? Troubleshooting exercises are often hindered by this type of false alarm, but many of them could be avoided with an "in-circuit" component tester such as the EA Handy Tester.

## CAR ALARM \$29.00

This Car Alarm uses the battery earth strap as a sensor to detect when a "courtesy" light or other electrical load occurs when a thief enters a vehicle. The circuitry is simple and immune from false triggering problems. ETI July 81



## VIDEO AMPLIFIER \$15



EA AUG 83

Bothered by smeary colours, signal beats and RF interference on your computer display? Throw away that cheap and nasty RF modulator and use a direct video connection instead. It's much better.

The Video Amplifier features adjustable gain and provides both normal and inverted outputs. Power is derived from a 12V DC plugpack supply. INCLUDES JIFFY BAG

## LOW OHMS METER \$34.50

How many times have you cursed your Multimeter when you had to measure a low-value resistance. Well alas, with the "Low Ohms Meter" you can solve those old problems and in fact measure resistance from 100 Ohms down to 0.005 Ohms. ETI 158 November 81




## NAIL FINDER \$10

Essential for the home handyman the Nail Finder will help locate timber studs behind Gyprock or plasterboard wall surfaces as well as locating pipes and wiring buried in walls.



EA OCTOBER 83


## MOTORCYCLE INTERCOM \$40

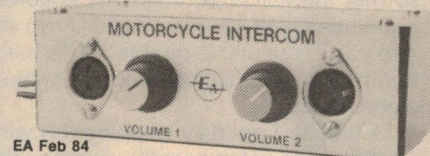

EA Feb 84

Motorcycling is fun but conversation between rider and passenger is usually just not possible. Build this intercom and you can converse with your passenger at any time while you are on the move.

## SLIDE CROSS FADER \$85.00

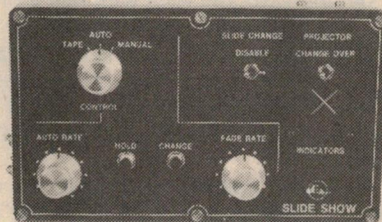

## PHONE MINDER \$25

EA Feb 84



Dubbed the Phone Minder, this handy gadget functions as both a bell extender and paging unit, or can perform either function separately.

## ±12V RAILS FOR LAB POWER SUPPLY

EA July 1983




\$13

An inexpensive addition to the 50V 5A Lab Power Supply which should prove its worth many times over. It provides additional fixed ±12V outputs for lower power applications.


## Driveway Sentry

\$32



Activated by your car's headlights, the "Driveway Sentry" will turn on a driveway or garage light so that you can make a safe exit from your car on the darkest of nights. At the end of five minutes, it will automatically turn the light off again.


## SPEED SENTRY \$21

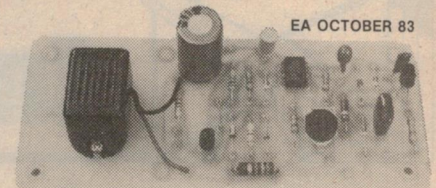

EA OCTOBER 83

Paying speeding fines can be a painful business. Build this Speed Sentry and avoid further pains in the wallet.

## 50V 5A LABORATORY POWER SUPPLY




New switchmode supply can deliver anywhere from three to 50V DC and currents of 5A at 35V or lower. Highly efficient design.

EA May, June 1983

\$140.00

## CAR IGNITION KILLER

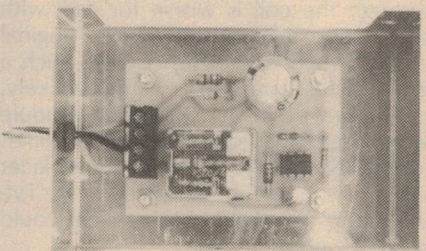

\$13

EA Feb 84

Most car burglar alarms are easily circumvented, but not our cunning "Ignition Killer". This sneaky antitheft device uses a 555 timer to place an intermittent short circuit across the points. Until disabled by its hidden switch the circuit effectively makes the car undriveable — a sure deterrent to thieves!

## Electric fence \$19.50




Check our prices

SEPTEMBER EA 1982

Mains or battery powered, this electric fence controller is both inexpensive and versatile. Based on an automotive ignition coil, it should prove an adequate deterrent to all manner of livestock. Additionally, its operation conforms to the relevant clauses of Australian Standard 3129.


## EA GUITAR BOOSTER

\$17.50

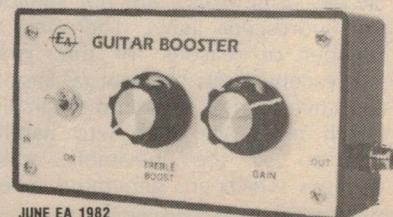

JUNE EA 1982



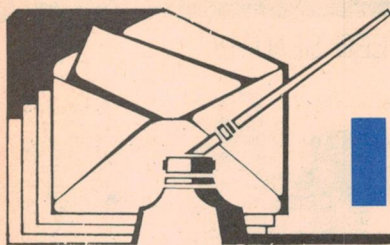

# Information centre

**IGNITION KILLER:** I have a 1983 Ford Laser with breakerless ignition. Will the "killer" in its present form not damage the car system when connected to the coil negative. (W.F., Canterbury, NSW)

● If the ignition killer is active for only short periods it is unlikely that any damage would result to the ignition system. However, if a thief abandons the car with the ignition system "hot-wired" it is possible that the coil could overheat and eventually burn out. This is preferable to having the car stolen but if you also want to prevent damage to the coil we suggest installing a 33Ω/5W resistor in series with the relay contacts.

The problem of heavy current flowing through the coil is worse for cars with solid state ignition fitted as original equipment because the coil has such a low DC resistance. It is highly unlikely, by the way, that the solid state module would be damaged by the ignition killer.

**IGNITION KILLER:** The ignition killer project is a great idea! However, I've thought of a couple of things that could make it better.

Firstly, the "disable" switch should be taken from "reset" (pin 4) of the 555. This should be tied high via a pullup resistor so that the unit is permanently enabled, but when taken low via a switch from pin 4 to earth, the unit is disabled. This has a number of advantages over the original placement:

1. A burglar hopefully snipping this wire would only permanently enable the device (rather than disable with the original design).

2. It reduces the switch wires to one, as the other side is connected to a convenient earth under the dash.

Secondly, to any thief with half a brain, a couple of extra wires across the H/T coil leading to a box is going to look a bit suspicious — snip — no more ignition killer. This might not look so bad if the box was marked "electronic ignition" of similar.

Another possibility is to make the unit very small and mount it inside the H/T coil — there's enough room if you don't use a PCB and use a compact relay. This would only leave one extra wire (enable)

to give an indication of an anti-theft system.

However, this approach is probably beyond the scope of most of your readers, not to mention a number of technical difficulties — like the H/T coil being full of transformer oil which could lead to premature component failure if not properly sealed (how well does a relay full of oil work? I suppose it would solve the problem of relay click attracting the thief's attention!). (D.C., Rosanna, Vic.)

● We agree that, at first sight, using the reset pin of the 555 as the enable/disable control is attractive. However, in the electrically noisy environment of a car, using the reset pin with a long wire to the on/off switch is asking for trouble. You would be likely to have intermittent false triggering.

It is far better to have the 555 completely disabled by removing power via the on/off switch. At least that way there can be no false tripping of the relay and no likelihood of stalling in the wrong place.

## How to dim fluorescent lights

**AUTODIM:** I have built two of the Autodim units which you published in January 1981. The reason for this type of unit is that I have a theatre and I felt this would be the answer to house lights and curtain lighting.

The house lights being incandescent, I have no trouble at all, but the curtain lighting uses fluorescent tubes and the problem here is when the light reaches about half-brilliance it starts to pulse so I am unable to bring it up to full on, without severe pulsing.

I have previously had the lights on manual dimmers and they worked OK, so the question is do you know of a modification which will cure this problem? (K.T., Ashwood, Vic.)


● As a general rule, light dimmer circuits using Triacs are not suitable for fluorescent lights. There are a number of reasons for this. First, fluorescent lights present a largely inductive load to the dimmer circuits which most are unable to handle because of the inevitable spike voltages which are generated when

the Triac turns off at the end of each mains half-cycle.

At best, these spike voltages may cause the lamp to flash on and off in an uncontrollable fashion, as you have found. At worst, the spike voltages may destroy the Triac. The way around the problem is by using a commutating network across the Triac. This consists of a series RC network which is selected to suit the

load driven by the Triac and it reduces the spike voltage to a safe value.

The other problem associated with dimmer circuits is that fluorescent lights will not start reliably at low settings of the dimmer. The reason for this is that the energising voltage for the tube heaters is inadequate for the required electron emission and if a starter circuit is used, the initial tube current will be too low to give the required tube firing voltage.

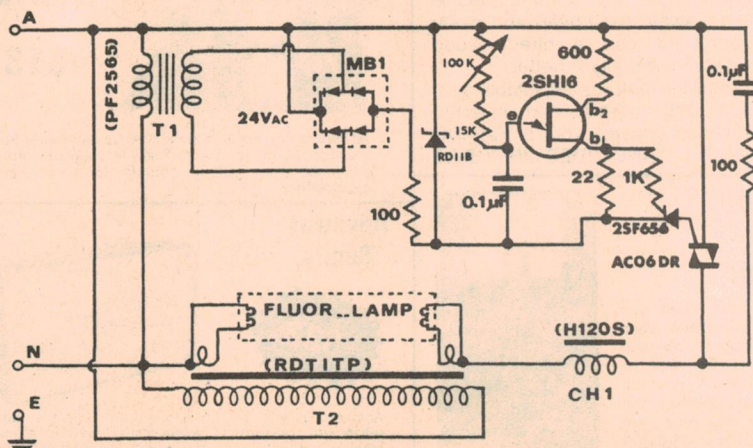



Only one wire need go directly to the coil negative and even if both wires go directly to the coil it should be possible to rout them behind the coil so that they are well nigh invisible. And if the thief does find the wires to the ignition coil you would be able to console yourself that he was really determined to pinch your vehicle. Even the best alarm will not stop a really determined thief. Unfortunately.

As far as the suggestion of building the ignition killer inside the coil is concerned, it is just not on. The above remarks about electrical noise apply even more so here. Not to mention the physical problems of coil flashover to foreign components mounted inside the cap!

**FLOW/ECONOMY METER:** March 1983 had a project on a fuel flow/economy meter for motor vehicles. This project used a fuel sensor which could be purchased from Dick Smith and I have purchased one. I want to make a fuel flow meter for my boat and for this purpose a lot of the features on your project are superfluous.

What is required is simply a circuit to provide a digital readout of the signal from the fuel flow sensor in litres per hour or gallons per hour. Can you suggest how your original circuit could be changed to perform this simple function, or is there someone I can contact to get such a circuit design. (P.K., Gold Coast, Qld.)

The only way to reliably dim fluorescent lights is to rewire the fittings so the heaters are permanently energised from a constant voltage, ie, not affected by the dimmer operation. The accompanying circuit which is reprinted from our September 1970 issue (and originally from the STC "Components Review") shows the required circuit arrangement. The circuit shown is for a 20W tube but the principle could be adapted to any tube rating.

In addition, more than one fluorescent tube may be controlled provided there is a separate ballast inductor (CH1) and heater transformer (T2) for each tube. The AC06DR Triac may be substituted with any 6-amp 400V type such as the SC141D from GE. The 2SF656 may be replaced with a C103 or C106 and the 2SH16 unijunction transistor replaced with a 2N2646.

Transformer T2 (Ferguson RDT1TP) is the tube heater transformer and has two separate windings which deliver between 3.7 and 3.8 volts with sufficient current for any tube rated between 20 and 65 watts.

## Electronics Australia Reader Service

"Electronics Australia" provides the following services:

**PHOTOSTAT COPIES:** \$3 per project, or \$6 where a project spreads over multiple issues (price includes postage). Requests can be handled more speedily if projects are positively identified, and if not accompanied by technical queries. We reserve the right to supply complete back issues instead of photostats, where these are available.

**CHASSIS DIAGRAMS:** For the few projects which require a custom metal chassis (as distinct from standard cases) dyeline plans showing dimensions are normally available. \$3 including postage.

**PC BOARD PATTERNS:** High contrast, actual size transparencies: \$3, including postage. Please specify positive or negative.

**PROJECT QUERIES:** Members of our technical staff are not normally available to discuss individual projects, either in person at our office, or by telephone.

**REPLIES BY POST:** Limited to advice concerning projects published within the last three years.

Charge \$3. We cannot provide lengthy answers, undertake special research, or discuss design changes. Nor can we provide any information on commercial equipment.

**OTHER QUERIES:** Technical queries outside the scope of "Replies by Post" or submitted without fee may be answered in the "Information Centre" pages, at the discretion of the Editor.

**COMPONENTS:** We do not sell electronic components. Prices and specifications should be sought from advertisers or agents.

**BACK ISSUES:** Available only until our stocks are exhausted. Within six months of publication, face value plus 30c for post and packing for each issue. Seven months and older, \$3 (includes post and packing and storage fee).

**REMITTANCES:** Must be negotiable in Australia and made payable to "Electronics Australia". Where the exact charge may be in doubt, we recommend submitting an open cheque endorsed with a suitable limitation.

**ADDRESS:** All requests to the Assistant Editor, "Electronics Australia", Box 163, Chippendale, 2008.

● It is not possible to modify our March 1983 design so that it has a digital readout instead of an analog display. You would have to discard the circuit completely and start again. The approach you need is similar to that used in Circuit & Design Ideas for May 1983. To get a reading in litres per hour you would have to use the fuel flow sensor to clock the 74C926 counter (pin 12) and provide a fixed timebase for latch and reset signals.

However, we are not sure that a digital display would be as effective as the analog unit we designed because, inevitably, there would be fluctuations in the reading. This is in spite of the fact that marine engines use constant throttle settings for long periods.

**LOG PERIODICS:** I am a beginner hobbyist with electronics and would like to build an antenna from the article by M. Taylor, EA March 1984. I was hoping to get the best reception value for now and future years and so figured designs 1 & 5 on a pole together would make sense. Is that feasible? If so, do I simply wire their harnesses in parallel coupling to a 75Ω coax?

Also, could you expand the explanation of the "stub termination" and the fitting "feeder termination length" as, for some reason, I am unable to clearly understand the notes on these? (D.S., Rozelle, NSW.)

● You have not indicated what you want the antennas for but we assume that you are mainly concerned with TV reception. In that case, design number one should be adequate for your purpose since you are an inner city dweller.

On the other hand, if you really do wish to feed both these antennas into the one cable, it would be necessary to

combine the two signals by means of a suitable diplexer. In essence, this is a combination of a low pass and a high pass filter which stops the antennas from loading each other.

Note also that if you did install both antennas on the same pole you would have to space them about three metres apart to achieve the best performance from each. That would result in a fairly long pole.

As described in the fourth article in our series "How to obtain better TV reception" in October 1983, the stub on a log periodic antenna is merely a length of short circuited feeder (coax cable) or a wire loop (or can be aluminium tubing) of a particular length which is included to match the antenna load. What the stub does is to balance out the reactance of the antenna over a fairly narrow range of frequencies and thereby make the antenna a more resistive source.

As far as the "feeder termination length" is concerned, it is the effective length of the stub. For a stub of 833mm, as specified for design one, you will need twice that length of aluminium wire or strip. Note that the stub can be folded back along the underside of the boom.

**LOG PERIODIC DIPOLES** Allow me to thank you for the series "How to obtain better TV reception". As an "ultra-fringe" viewer, they have been much appreciated. I had great fun playing with the computer program and converting it to run on a Microbee. The point of all the effort was to design a high gain antenna for channel 11. I am now uncertain on two points, largely to do with the mechanics.

On page 79 referring to dipole length, does this mean that the gap is included within the length or that the harness gap



is excluded? In either case, I assume that there are gap dimensions that it would pay not to exceed.

In referring to the feeder termination length does this run around the corner (a) or not include the corner (b) as seems more likely? Again I thank you for a most interesting magazine. (J.L., Ravensthorpe, WA.)

● As far as the dipole length is concerned it does include the harness gap. Depending on whether you use standard antenna hardware or make your own the harness gap can be around 70mm or so. The "feeder termination length" is the length of the stub which means that the length of aluminium strip required is twice that value.

Incidentally, if you require a high gain antenna only for channel 11 it would be wise to consider the single channel Yagi designs presented in part five of the series, in the November 1983 issue. These antennas would be smaller than a log periodic array of similar gain and somewhat easier to make.

**MUSICOLOUR IV:** I have built the Musicolour IV for disco purposes and also to colour my room. Since I built it, people have asked me to do something similar for operation in a car and I think something can be done using the Musicolour IV circuit procedure. We can cancel the cost of the transformer and

the rectifier diodes. (A.C., Bossley Park, NSW.)

● It would be no simple task to adapt the Musicolour circuit to use in a car, running from the 12V battery supply. For a start, the Triacs in the Musicolour run from AC and being a regenerative switching device, cannot be made to work on DC. By regenerative we mean that once the device is turned on it cannot be turned off unless the current drops to zero of its own accord or the supply voltage is reversed.

If a low voltage Musicolour device was designed it would have to use power transistors to drive the lamps. And probably heat dissipation in the transistors would be a problem so it would be necessary to use switchmode techniques to control the power to the lamps.

Frankly, we would be loathe to promote the use of a Musicolour device in cars anyhow. They might be permissible in boats, caravans and in the back of recreation vehicles but even there we are not convinced there would be much use for it. Unless we get some indication that readers are keen on the idea that is one that we will give a miss.

**PORTABLE COMPUTER:** I am going to buy a VZ200 soon and would really like a portable computer but I can not afford one. So I am writing to ask if you would

publish a project which was fairly simple which has these features: LCD display as shown on the bottom of page 106 in your January issue, EPROM programmer, EPROM banking card, RS232 interface 2k RAM up-grade and a battery pack to power it and the computer. (M.C., Parkside, SA.)

● Sorry, but we cannot do it. If you wait a few years we are sure that such a computer will be cheap. It is not at the moment.

## Notes & Errata


**IGNITION KILLER** (February 1984, File No 3/AU/38): There is a possibility of damage to the ignition coil in the event of the "killer" circuit being operated for an extended period. To prevent this, connect a 33Ω/5W resistor in series with the relay contacts.

**HOW TO OBTAIN BETTER TV RECEPTION** Pt 6 (March 1984, File No 6/MS/14): The parameter alpha is incorrectly defined. It should be half the angle of the virtual apex of the array. Also, in the formula for the relative length of the antenna, the divisor term should be Bs and not Bx. Note also the dipole length in each case includes the spacing between the respective harness connection points.

meguro


## OSCILLOSCOPES From Japan

WORLDWIDE RECOGNITION FOR QUALITY AND RELIABILITY

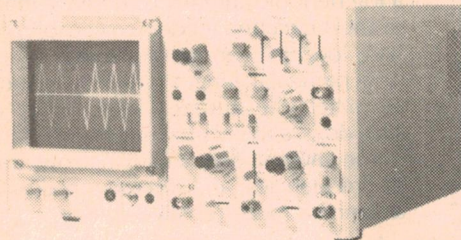

**MO-1252**  
35 MHz  
2-Channel  
\$749\*

Sensitivity: 5mV div-10V div; 1mV div at x5 MAG.  
Bandwidth: DC or 10 Hz-35 MHz.  
Sweep Mode: NORMAL, AUTO, SINGLE, DELAY  
Trigger Delay: INTEN'D, DELAY D: 1μs-100ms.  
Trigger Source: INT, LINE, EXT, EXT 10.  
X-Y Operation & Z-Axis modulation.

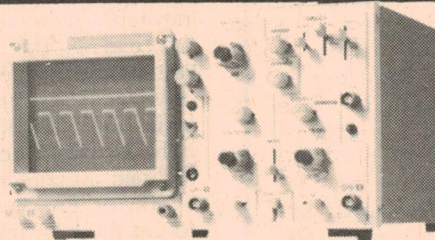


**MO-1251**  
(with component tester)  
20 MHz  
2-channel  
\$525

Sensitivity: 5mV div-20V div; 1mV div at x5 MAG.  
Bandwidth: DC or 10Hz-20MHz.  
Sweep Mode: NORMAL, AUTO.  
Trigger Source: INT, CH2, LINE, EXT.  
X-Y Operation & X-Axis modulation.  
Component Tester: for R.L.C. & diodes.

**PROBES (x 1/ x 10)  
SUPPLIED WITH  
EACH CRO AT NO  
EXTRA CHARGE!**

**EMONA CATALOGUE '84 — INSTRUMENTS & COMPUTERS AS AVAILABLE ON REQUEST.**

**KIKUSUI**



**UNBEATABLE VALUE FOR A 2-CHANNEL CRO**

**COS-5020**  
20 MHz  
2-Channel  
\$469\*

**Ideally priced for:**

- Hobbyist
- Schools
- Laboratories
- Workshops
- Amateurs

Sensitivity: 5mV div-5V div;  
1mV div at x5 MAG.  
Bandwidth: DC or 10 Hz-20 MHz.  
Sweep Mode: AUTO, NORM, SINGLE.  
Trigger Source: CH1, CH2, LINE, EXT.  
X-Y Operation, CHOP and TV.

\* Add 20% Sales Tax if applicable



**EMONA INSTRUMENTS (NSW) RADIO PARTS GROUP (VIC.)**

Showroom & Sales:  
National Australia Bank Bldg., 2nd Floor,  
661 George Street,  
Sydney NSW 2000

Tel: (02) 212-4815, 212-3463

562 Spencer Street, West Melbourne 3003. Tel: (03) 329-7888  
1097-1103 Dandenong Road, East Malvern, Vic. 3145

Tel: (03) 211-8122



# L. E. CHAPMAN

122 PITT ROAD, NTH CURL CURL.  
MAIL ORDERS: BOX 156, DEE WHY, NSW. 2099.  
TELEPHONE 93-1848.

## SUPER SPECIAL GRAMO MOTOR AND PICKUP 240V

3 speed 33-45-78 includes  
cartridge and  
stylus turnover



**\$12**

P&P NSW \$2.75  
INTERSTATE \$4.20  
WA, NT \$5.20

## SUPER SPECIAL FM STEREO KITS



Sets of 3 modules includes FM tuner decoder  
and if detector. Circuit diagram supplied.

**ONLY \$22** PP \$1.40

Send stamped envelope for copy of Elec-  
tronics Australia magazine review of the units.

## VU & BALANCE METERS

**\$2** PP 70 cents

12K $\Omega$  100uA \$2.00 STEREO VU \$3.00

## VALVE SOCKETS

9 pin 25c — 7 pin 25c — octal 25c.

## DUAL VU METER \$3



PP 70 cents

## ICs

74LS76N	50c	SAA5050	\$2.50
74SL74N	50c	747S08N	50c
74LS00N	50c	74LS392N	50c
14011UB	50c	74LS174N	50c
S041P	\$1.00	SN29848N	50c
2612N	50c	MC14011UB	50c
74LS157N	50c	NES560N	50c
53114N	50c	74LS90N	\$1.50
MM53114N	50c	74LS93N	\$1.50
HEF4024BP	\$1.50	SC87024P	\$2.50
MM57186N	\$2.50	S7646211B	\$1.00
NES66N	50c	74LS90N	50c
HEF4024BP	50c	HEF4011BP	50c
74LS76N	50c	74LS10N	50c
MC1306P	50c	SN29862N	50c
2112B	50c	HEF4019BP	75c
2112N	50c	NES66N	50c
SC87024P	\$2.50	NES66N	50c

## SPEAKER

2-way crossover  
networks

**\$2**

CRYSTALS for colour TV

\$1 each

## SPEAKER TRANSFORMERS

for valve radios  
7000 to 15 ohm \$4.50  
7000 to 3.5 \$3.50

## 455KC IF Trans for valve radios

\$1 each  
Aerial OS coils  
75c each

## VORTEX TAPE DECK MOTORS

\$10

## CAR RADIO Suppressors

5 for \$1

## SPECIAL

Chrome 1/4 shaft push-on knobs. 10 for \$1.  
Usual price 60c to 80c each.

## IC SOCKETS

24 pin 35c  
28 pin 40c  
18 pin 25c

## TRANSISTORS AD161-162 \$1 pair

100 mixed Capacitors, fresh stock, all  
handy values \$2

## AD149 \$2 pair

100 mixed resistors, handy values \$2

## STICK RECTIFIERS

For colour TV 75c each

## SUPER SPECIAL JVC CD FULL 4 CHANNEL MODEL 4VR 1006 AM/FM TUNER AMPLIFIER 40 WATTS RMS

Normal price over \$600

our price only

\$195 each

instruction

manual included.

PP NSW: \$2.75

Interstate: \$3.80

TAS: \$4.50

WA/NT: \$7.00



## POTS ROTARY

1/2 Meg	50c
1 Meg	50c
100K	30c
100K Switch	50c
50K Double Pole Switch	50c
7.500	30c
10K Switch	50c
250K	30c
50K	30c
20K	30c
10K Min Pots	25c
50/ohm	50c
1/2 or 1 Meg Switch	50c
1/2 1 meg dual Concentric tapped at 100K	\$1
2 meg ganged double pole switch	\$1
1.5 meg dual ganged	50c
2 meg ganged log	\$1
1 meg dual ganged	\$1
1/2 meg dual ganged LIN	75c
25K 50K dual ganged Concentric double switch	\$1
200K single line	30c
20K wire wound	75c
dual log 10K	75c
100K dual ganged linear pots	75c
10K sub min log pots	50c
250K ganged pots	75c
25K in ganged pots	75c

## CLOCK MODULES NATIONAL

CIRCUIT  
DIAGRAM  
SUPPLIED



PP \$1

Micro switches to suit.


Included

**\$3**

## SLIDE POTS

1/2 meg dual	\$1
1 meg dual	\$1
2 meg dual	\$1
25K dual	\$1
250K dual	\$1
1K dual	\$1
50K single	50c
250K single	50c
10K single	50c
2 meg single	50c

# BENELEC

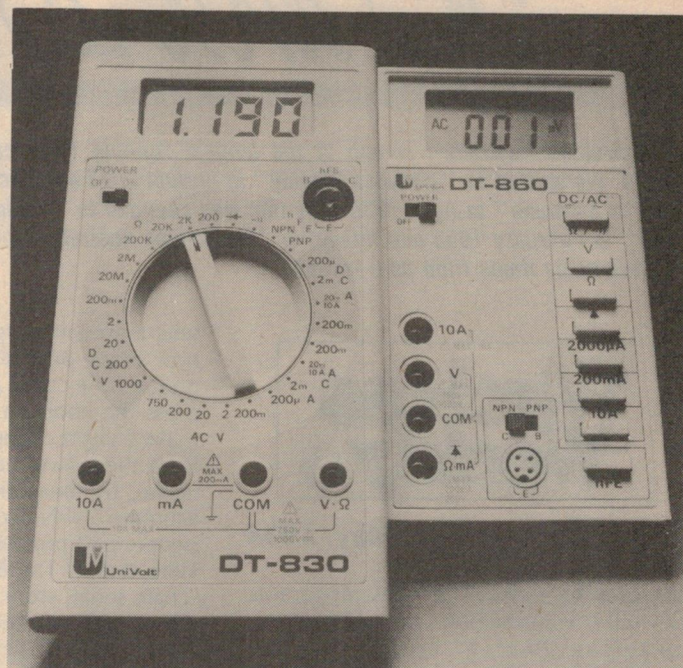

# MEASURING POWER PLUS

**Model DT-830.** The accuracy and functions you need  
at a sensible price. Extreme electrical and mechanical  
ruggedness combined with the highest accuracy in its  
class.

- ☐ 30 ranges, including transistor testing, audible  
continuity test
- ☐ Auto zero and auto polarity. Sampling time 0.4sec
- ☐ Voltage inputs protected to 1000V, Ohms and  
Current to 250VAC
- ☐ Basic Accuracy  $\pm 0.5\%$

**Model DT-860** Autoranging, fast sampling (0.5sec),  
high resolution and moderate price:

- ☐ Continuity buzzer with fast (0.4sec) response  
(sampling time other ranges 0.5sec)
- ☐ Built-in stand
- ☐ Basic Accuracy  $\pm 0.5\%$



For further details and latest prices contact:

**BENELEC Pty Ltd**

1 Greville Street, Randwick, N.S.W. 2031

**Phone:** (02) 665-8211 **Telex:** AA20181 BENELC



# 50 and 25 years ago...

*"Electronics Australia" is one of the longest running technical publications in the world. We started as "Wireless Weekly" in August 1922 and became "Radio and Hobbies in Australia" in April 1939. The title was changed to "Radio, Television and Hobbies" in February 1955 and finally, to "Electronics Australia" in April 1965. Below we feature some items from past issues.*



May, 1934

**Pictures by radio:** The latest apparatus for the transmission of pictures by wireless (which could not be conveniently and economically made in Australia) has now reached here, and AWA engineers are now engaged in adapting and modifying the equipment for installation in the Beam Service. When this is completed it will be possible to transmit photographs, fingerprints, handwriting, cheques, drawings, and other documents across the world.

The first picture transmission was carried out by Mr Fisk between Australia and London as early as 1929, but this was of a purely experimental nature.

**Phasing out the carbon mike:** It is said that the new BBC ribbon microphone, developed on the moving coil principle by a young research worker called Alexander, may become the BBC standard type. The BBC now has a "Microphone Research and Studio Technical Committee," which endeavours to improve transmissions; the committee is said to be thinking of changing from the Reiss microphone to the Western Electric type, especially for outside broadcasts.

**Early radio-teletype:** The American Government is testing tele-typewriters, or typewriters operated by wireless, on the American Federal Airway between Baltimore and Washington. If the tests are successful the Government hopes to effect a substantial saving in land-wire costs. In this present test the tele-typewriters will be used for weather forecasts.

**The rating game, 1934:** A Dr Nevil Hopkins, of New York, calculates that most listeners use mains sets, and he says that a knob on all receivers, joined to the mains, could be fitted up so that

when an announcer wished to know how many people were listening to his program he could just ask all listeners to press the knob on their sets; this would make a slight change in the current drain from the power-house, and the power-house, by measuring the change, could estimate fairly accurately how many people had pressed the button.

**Who dun it?** The BBC has begun a new "chain serial" story for Friday nights. One well-known writer begins a mystery story, and next week another well-known writer takes it up, etc. This series is to be opened up by Agatha Christie, and then it will be taken up by Dorothy L. Sayers, Compton Mackenzie, and Walter de la Mare, among others.

**Line out:** Geneva police are trying to find out who cut the lines carrying the Austria versus Switzerland football description on March 25. The game was the biggest of the season; there were 25,000 spectators, and the match was half-way through when someone cut the line. The police feel that political feeling was responsible.



May, 1959

**Soon, a man in orbit:** The American National Aeronautics and Space Administration Research Centre at Langley Field VA has made extensive tests on the design for a "Mercury" capsule intended for outer space.

Prototypes have been tested for lift, drag and static stability using a specially developed wind tunnel, to evolve the best shape for an orbital vehicle.

In the case of an abortive launching, a rocket on top of the capsule will be fired to ensure elevation to a safe altitude so that it can return to earth by means of parachutes for recovery and the safety of its occupants and contents.

Further experiments have been

conducted to observe water landing conditions if those should be encountered.

The capsule, with its protective covering against heat and radiation, will carry a variety of instruments, communications equipment, pressurised living quarters and survival equipment.

**Hovercraft debut:** Britain's fantastic "sea saucer," the forerunner of giant flying ships which will revolutionise ocean travel by skimming at high speed a few feet above the waves, is nearly ready for flight.

The prototype, a gleaming 25ft oval of polished aluminium, will have its first hovering tests next month.

If all goes well it will be launched on Southampton Water early in June, according to the "Daily Mail."

The giant flying-ship — officially called a Hovercraft — is being developed by Saunders Roe, under a contract from a new firm set up to exploit the invention.

The firm, Hovercraft Development Company Limited, and Saunders Roe are being backed by the National Research Development Corporation.

One of the first uses of the Hovercraft might be as a car ferry.

**Valves fight on:** A revolutionary development in electron valve design, hailed as one of the most significant advances in valve history, was announced recently by the Radio Corporation of America.

"Development of the new design represents a major breakthrough in tube size, performance, power drain, and reliability," said D. Y. Smith, vice-president and general manager, RCA Electron Tube Division. "It opens the way to mass production of high performance, thimble-size valves having improved ruggedness, reliability and efficiency."

Called "Nuvistors," the valves could lead to new electronic developments in such instruments as television sets, communications receivers, and computers, as well as more compact and efficient electronic equipment for defence and industry.


**Press-button telephone:** Dialling a telephone number may soon be old fashioned in the US... instead you'll simply press buttons! Apart from being faster than dialling the new system will result in fewer wrong numbers, the telephone companies say. The new-style telephone is being tried out in a number of towns and cities across the country.



## COSMIC QUESTION TIME


PENCILS READY, RIGHT, NOW... IN THEORY IF A QUASAR IS MOVING AWAY FROM US IT SHOULD APPEAR RED. IF A QUASAR IS APPROACHING US IT SHOULD APPEAR BLUE. SOUNDS SIMPLE ENOUGH... AH, HA BUT...

GOOD GRIEF.

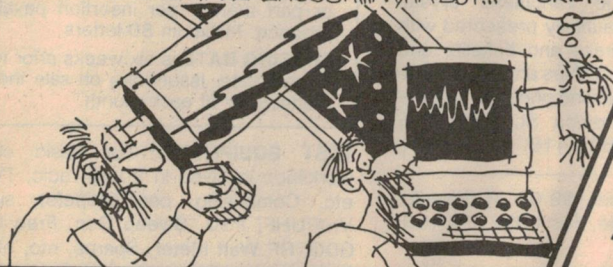


THESE PHENOMENA DEPEND ON STUFF LIKE GENERAL (EINSTEIN TYPE) RELATIVITY, EXPANDING UNIVERSES, DOPPLERS, EDWIN HUBBLES, AND OTHER STUFF.

STRANGE, I CAN'T GET ANYTHING TODAY.

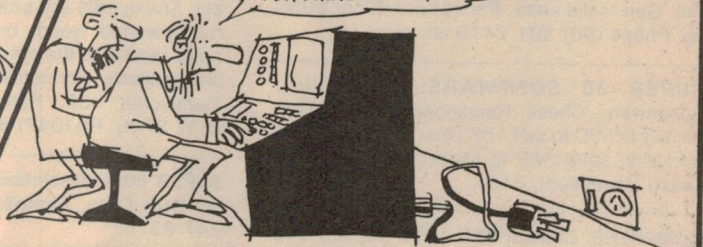

IN FACT, NO BLUE SHIFTED QUASARS HAVE YET BEEN FOUND. HANG ON, WE'VE JUST RECEIVED SOME MORE THEORY FOLKS—ACCORDING TO HOYLE (FRED TYPE), WHEN A QUASAR IS MOVING THROUGH SPACE TOWARDS US IT'S ENERGY BLOWS OUT THE BACK AS A JET WHICH REGISTERS AS A RED SHIFT. SO THERE.

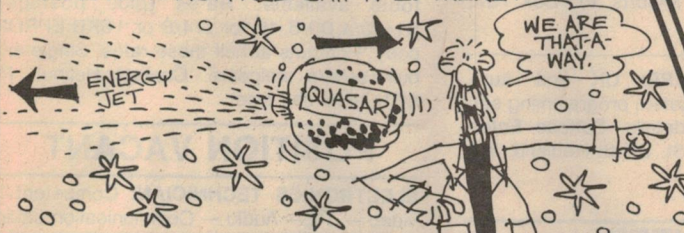

ANYHOW, HERE'S THE QUESTION: WHAT COLOUR WOULD A QUASAR BE IF IT DIDN'T KNOW WHETHER IT WAS COMING OR GOING?


WHAT'S A QUASAR?

WHAT'S THE QUESTION?

WHAT'S THE POINT?

NOW THAT IS A GOOD QUESTION.

UM...

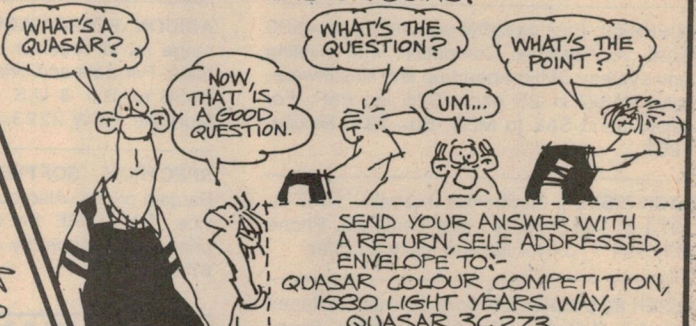


SEND YOUR ANSWER WITH A RETURN, SELF ADDRESSED ENVELOPE TO:-  
QUASAR COLOUR COMPETITION,  
1580 LIGHT YEARS WAY,  
QUASAR 3C 273

## MAY CROSSWORD

### ACROSS

1. Affixed terminal, etc, to wire. (7)
5. Electronic communication organisation. (7)
9. How charges find their like? (9)
10. Minimum points in a standing wave. (5)
11. An in-word in terms of R.M.S. (4)

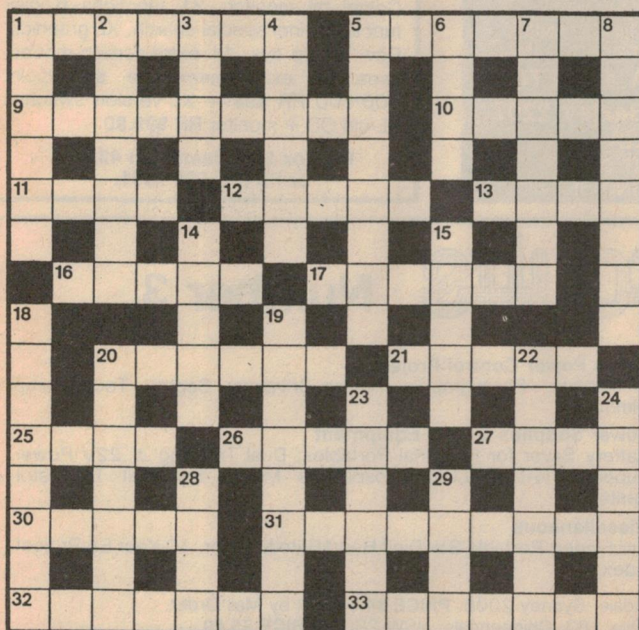

12. Famous atomic physicist. (5)
13. SI prefix. (4)
16. Eliminate errors in a program. (5)
17. Metal used in a discharge lamp. (6)
20. Universal tool. (6)
21. Type of electronic detector. (5)
25. Computerised betting system. (4)
26. Gap jumper! (5)
27. Obviously without charge. (4)
30. Rectifying device. (5)
31. Said of motor capable of operating on DC and AC. (9)
32. Unit of electrical conductance. (7)
33. Said of a communication channel with one-way operation. (7)

### DOWN

1. Additive used in some magnetic tapes. (6)
2. Feature of coherent electromagnetic waves. (2, 5)
3. Lamp terminal. (4)
4. Said of forced oscillations. (6)
5. Particle emitted by a cathode. (8)
6. Signal path. (4)
7. Element present in certain cells. (7)

## SOLUTION FOR APRIL

S	H	O	R	T	W	A	V	E	M	O	R	S	E
T	O	C	L	I	E	X							
R	E	A	D	O	U	T	E	T	C	H	A	N	T
O	L	L	I	M	A	D	E						
B	A	U	D	T	V	S	E	T	C	Y	A	N	
E	M	P	E	N	B								
N	I	C	A	D	S	T	R	A	N	G	L	E	
T	N	R	A	S	I	A							
R	E	A	L	T	I	M	E	P	R	I	N	T	
A	S	P	C	D	G								
N	E	O	N		R	E	S	I	N		K	I	T
S	R	O	R		R	M							
M	A	G	E	N	T	A							
C	H	A	R	G	E	R							
T													

8. State where linked circuits have unequal impedances. (8)
14. Section of a TV receiver. (5)
15. Another section of a TV receiver. (5)
18. Thermionic valves having five electrodes. (8)
19. Regions of magnetic tape incapable of producing a signal. (8)
20. Basis of inverter transformer. (3, 4)
22. Makes a spray. (7)
23. Woven wires. (6)
24. Type of speaker enclosure. (6)
28. Fair sort of place to get second-hand radios, etc. (4)
29. Significant feature of a CRT. (4)



# EA marketplace EA marketplace

## FOR SALE

**VIDEO COLORIZE:** B/cast STD, also Elect test Pat. Gen. solid state. Perfect condition, \$950 ea. Phone (08) 381 7419 ah.

**SUPER 80 SOFTWARE:** Caterpillar, Spacewarp, Chess, Renumber and E1 Draw. All fully in M/C to suit 16K plus. For detailed information send SAE to Mastersoft, 6 Beverly Court, Heathmont, 3135.

**COMPUTER CLINIC PTY LTD:** Repairs and services small business and personal computer systems, disk drives, printers, etc. Bankcard (07) 269 8573, PO Box 68, Aspley, 4034.

**SUPER-80:** Fast cassette system up to 4000 Baud, very reliable. Compatible with existing tape system, 3MHz speed-up and all software. Load BASIC in 25 secs. \$25 inc P&P. For details send SAE to MDS, Box 239, Bexley, 2207.

**BACK ISSUES:** Electronics Australia. 1967-8, 1974-6. 1978-83. No year complete. Phone (03) 534 7104 for list and make an offer.

**SUPER 80 USERS:** Software available on tapes from \$8. Write for info. Also available, Super 80 expansion kit. Features sound generator, I/O port, 2 paddles or analog joystick port, Centronics interface, Atari joystick port. Complete kit plus postage, \$45. Send cheque, etc to Matrix Software, PO Box 291, Kensington, 2033.

### AGRO DATA CONTROLLERS TELEPHONE (075) 62 2329

#### FOR SYSTEM 80 & TRS 80 MODEL I COMPUTERS

KITS DISK CONTROLLER \$119

DOUBLE DENSITY \$130

FULL EXPANSION UNIT WITH  
DOUBLE DENSITY \$550

**VINTAGE RADIO KITS:** The "Unidne" 1920s one valve vintage radio kit (see EA, Nov 83) 2nd version now available. Also the "Reinartz 2" — a two valve short wave set with plug in spiderweb coils. And the "Variometer" crystal set. These sets are beautifully presented with real polished wood, brass and bakelite and really recapture the era. Valves and other parts also available. For details and prices write to — Technicraft 338, Katoomba St, Katoomba, NSW 2780. Ph (047) 82 3418.

**SUPER 80:** Disassembler, \$9.00. R. Vowels, 93 Park Drive, Parkville, Vic 3052. Ph (03) 347 6326.

**SPECTRUM ANALYSERS:** Solid State 500 MHz, \$1250, 100 MHz, \$1850. Perfect condition. Ph (08) 381 7419 AH.

**ADIDON FERROMAGNETIC CORES:** Large range for all receiver and transmitter applications. For data and price list send 105 x 220 SASE to: R.J. & U.S. Imports, PO Box 157, Mortdale, NSW 2223.

**SPECTRUM SOFTWARE:** UK and Aust. Bargain prices. Also custom programming service. Send SAE for details. Softpac Enterprises, 109 Kennedy St, South Hedland, WA 6722.

## WANTED

**ACCESS TO TRANSMITTER:** Type AT14 (used by DOC) for BOCP student to practice on. Terry Robinson, 21 Russell Ave, Woodend, Vic, 3442. Ph (054) 27 1574.

### RCS Radio Pty Ltd Tel. (02) 587 3491

IS THE ONLY COMPANY  
WHICH MANUFACTURES AND  
SELLS EVERY PCB & FRONT PANEL  
published in EA and ETI

651 Forest Road Bexley 2207  
AUSTRALIA

RING FOR INSTANT PRICES  
24 HOUR TURNAROUND SERVICE

**DISPLAY ADVERTS IN MARKETPLACE** are available in sizes from a minimum of 2cm x 1 col rated at \$15 for a col cm.

**CLASSIFIED RATES** \$3.60 for 40 letters or part thereof per insertion payable in advance. Minimum 80 letters.

**CLOSING DATE** is six weeks prior to the on-sale date. Issues are on sale the first Wednesday of each month.

**TEST EQUIPMENT:** For basic electronic workshop involved in 2 way radio, TV repair, etc. Comprising, oscilloscope(s), sig. gen. VHF/UHF, PSU, Sweep Gen, Freq Counter, GDO, RF Watt Meter, Spares, etc, etc. Must be in good working order. Ideal opportunity for person or company to sell the lot in one go. P. Burns, c/- PO Box 1265, Cairns 4870.

## READER SERVICE

**EPROM COPYING SERVICE:** Reliable, fast and confidential service. All Hex-Code printouts available. Rates (plus postage): \$1.40/4.00/6.40 for 2/4/8 or 16KB EPROM copy. Printouts at half these rates. Single and bulk orders welcome. Contact Helmut, Ph 561 7416 any time.

## POSITION VACANT

**ELECTRONICS TECHNICIAN:** Competent in video — TV — Audio — Communication equipment. Office Equipment an advantage. Located in Central Territory. Excellent salary. Contact manager (089) 62 2707.



### SUPERMON FOR ATARI

Compl ml monitor, 21 functions 6 disk functions, incl special search, XL graphics, Rev "B" op sys, 11 extra screen modes, uses no extra mem one solderpoint 400/800 RR \$89 = XL version switches XL/old OS + monitor RR \$99.90

PO Box 507, Beenleigh 4207,  
or Ph (07) 209 7891.

# projects & circuits

## THE CONTENTS:

### Audio, Video Projects

Video Amplifier for Computers and VCRs; Video Enhancer; Vocal Canceller; Stereo Simulator for Tuners and VCRs; Guitar Booster for Stereo Amplifiers.

### Automotive Projects

Transistor-Assisted Ignition System; Breath Tester Checks Blood Alcohol Level; Low Fuel Warning Indicator; Speed Sentry for Cars; Audible Turn Signal Indicator.

### Mains Power Control Projects

Musicolour; Photographic Timer; Driveway Sentry; Touch-Lamp Dimmer.

### Power Supplies & Test Equipment

Battery Saver for Personal Portables; Dual Tracking  $\pm$  22V Power Supply; 3½-Digit LCD Capacitance Meter; In-Circuit Transistor Tester.

### Miscellaneous

Nail Finder; Portable 3½-Digit Heart Rate Monitor. 10 Year EA Project Index


Available from: Electronics Australia, 57 Regent Street, Chippendale, Sydney 2008. **PRICE \$4.50**, OR by Mail Order: Send Money Order or Cheque to Electronics Australia, PO Box 163, Chippendale, NSW 2008. **PRICE \$5.40**.

## Number 3



# A.C.E. RADIO


136 VICTORIA RD. MARRICKVILLE, NSW 2204  
PHONE 51 3845

PROUD TO BE  
AUSTRALIAN 

## ELECTRONICS CENTRE

### ★ FM WIRELESS MICROPHONES ★

Electret Condensor • 88-108MHz • Top Quality • No Cable



MODEL 75

Uni-Directional • Field Strength •  
50V/M at 15 metres

**\$35**

P-P NSW \$2.50  
Interstate \$3.50



MODEL 78

### MINI TIE TACK

Separate Pocket Transmitter •  
Omni-directional • Field strength  
less than 50V/M at 15 metres.

**\$46**

### ★ MONEY SAVER SPECIALS ★

#### TOP GRADE ELECTROLYTICS

8000µF 75V DCW 2 FOR <b>\$9.75</b>	3300µF 75V DCW 2 FOR <b>\$6.50</b>	5600µF 40V 2 FOR <b>\$6.95</b>
10,000µF 40V 2 FOR <b>\$8.50</b>	2200µF 63V 2 FOR <b>\$3.95</b>	2200µF 35V RB 4 FOR <b>\$3.25</b>
4700µF 16V AX 4 FOR <b>\$5.50</b>	4700µF 35V AX 4 FOR <b>\$7.90</b>	1000µF 40V AX 4 FOR <b>\$3.60</b>

P-P NSW: \$2.50 INTERSTATE: \$3.50

### 50 WATT RMS SPEAKERS

FOR **\$39.95** PAIR OR \$22.50 EA.

#### ETONE FACTORY SCOOP.

30cm 8 Ohm Hi-Fi Woofer. Rugged Top Quality  
with Warranty. Foam Surround. 3.5cm V.C. Hefty Ferrite Magnet.  
Freq. Response. 35-4500 Hz.

P-P NSW for one, \$3.50. Interstate, \$5.00. P-P NSW for two, \$5.00. Interstate, \$7.00.

### LOW PROFILE FERGUSON TRANSFORMERS

12V. 7.5VA	24V. 20VA	18-0-18V. 40VA.	0-15V. 5A 0-15V. 5A 0-9V. 3A 40VA.
------------	-----------	--------------------	---

**\$5.50**

**\$6.95**

**\$12.50**


**\$12.50**

INPUT 240V AC

50 HZ.

P-P NSW \$2

INTERSTATE \$3.50



### MAGNAVOX 6W HI-FI WOOFER

8 ohm 20 watt • Freq respon 50-6500Hz. Reson  
45Hz. Rolled foam surround • High compliance  
suspension • Barium ferrite magnet • Excellent  
linearity at high power (ideal mid-range in systems  
to 65wrms).

**\$12.95** EACH

P-P NSW \$2.75  
INTERSTATE \$4.50

(Normal factory price in 100 lots \$18 each).

### ETONE SPEAKER SPECIALS

#### GENUINE FACTORY PRICES


Rugged top quality Aust made brand new bargains — all with factory warranty

Model	Size	Cone Type	V/Coil	Reson Hz	Freq Hz	Watts Rms	Price Ea or	2 for
4310	38cm	Straight surround	8 or 15 Ohms	45	40-6000	60	<b>\$74.00</b> or <b>\$141.00</b>	
4510	38cm	Straight surround	8 or 15 Ohms	45	40-6000	100	<b>\$94.00</b> or <b>\$179.00</b>	
4350	38cm	Hi-Fi	8 or 15 Ohms	30	30-4000	120	<b>\$74.00</b> or <b>\$141.00</b>	

Pack — Postage add for one 25/30cm model NSW \$3.50. Interstate \$5. For two 25/30cm models NSW \$5. Interstate \$7. For one 38cm model NSW \$4.00. Interstate \$6.00. For two 38cm models NSW \$7. Interstate \$8.50.

### 6 DIGIT COUNTER

40mm x 35mm x  
70mm



**6VDC  
250 MA**

**\$3.95**

P-P 75c

### EX-PMG PUBLIC TELEPHONE

10 CENT COIN  
OPERATED

BRAND NEW  
IN CARTONS

CIRCUIT  
DIAGRAM  
INCL

WT 15KG

KEYS TO  
LOCK  
MONEY  
CYLINDER  
INCL

(SOMETHING BETTER  
UN NUTHIN)

MAKES GREAT  
WALL/FLOOR  
SAFE


**\$57.50**

P-P NSW \$6.50  
OLD \$10.50, SA/TAS \$12.50  
NT/WA \$17.50

### • EX-COMPUTER FAN MOTORS •

!KEEP IT COOL!

4" Sq. 115V 50/60 HZ



#### EXCELLENT WORKING ORDER GUARANTEED

Amps • Power Supplies • Electronic Equipment will  
operate far more efficiently • Imp protected •

**\$7.95** EA

P.P. NSW \$2.50  
INTERSTATE \$3.50

### REGULATORS

7812. + 12V 1A  
7805 + 5V. 7905 - 5V 1A

**10 MIXED \$6.** P.P. \$1.50

#### HI-POWER BRIDGE RECTIFIER

400 PIV 35 AMP  
**\$3.75** P-P 75c

### A1 QUALITY TRANSISTORS 2N3055



**10 FOR \$6.** P-P \$1.50

DIODE IN 4004. 50 FOR \$2.50  
P-P 80c

### HIGH GRADE POTTER AND BRUMFIELD RELAY

**\$3.50**

P-P 95c  
KU series • 240 VAC 50Hz  
operation • 3 sets of 240V 10 amp  
change over contacts • perspex  
cover and mounting base included •  
size 50mm x 37mm x 35mm • ex-  
computer • as new condition. At less  
than 1/2 of the normal price.

### 2SD200 = BU205 TRANSISTOR

NPN VCBO  
1500V •



VCEO 700V

• 2.5 AMPS

**4 FOR \$3.75** P-P 75c

### MJE 3055 TRANSISTORS

**10 for \$9.** P-P \$1.50

### MJE 2955 TRANSISTORS

**10 for \$12**

PP  
\$1.50

### POWER TRANSISTORS

140V 20AMP

MJ15003 NPN

MJ15004 PNP

**\$7.90** PAIR P-P \$1

### TRANSMITTING TRANSISTOR

2N3927. NPN.  
TO-60

175MHZ.

12W. GOLD PLATED.

**2 FOR \$8.50** P-P \$1.50

### DOUBLE SPACED

#### VARIABLE CAPACITORS

A1 QUALITY.  
NEW IN CARTONS.  
1/4" SHAFT.  
BALL BEARINGS.

IDEAL FOR TRANSMITTERS, AERIAL TUNING, ETC.

1-GANG 10-50 PF  
10-70 PF  
48 x 35 x 30mm

**\$5.50**

P-P NSW \$1.  
INTERSTATE \$2.

2-GANG 10-25 PF  
10-70 PF  
48 x 35 x 55mm



**\$7.50**

3-GANG 10-25 PF  
48 x 35 x 80mm

**\$12.50**



# EA Magazine Holders

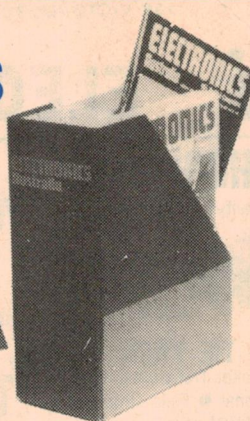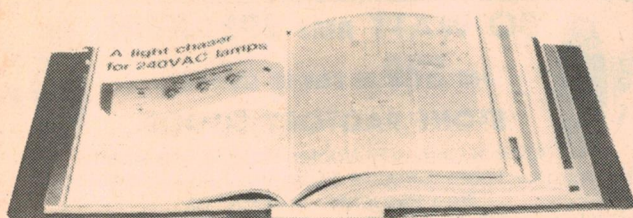

The binders and magazine holders are available over the counter from Electronics Australia, 57 Regent Street, Sydney, NSW — Price: \$5.10 binders, \$4.50 holders.

Mail orders should be sent to Electronics Australia, PO Box 163, Chippendale, NSW 2008.

Prices including postage are:

Holders: \$5.50 NSW; \$5.60 other states; or six for \$29.00 NSW; \$31.50 other states, \$A33.00 NZ.

Binders: \$7.00 NSW; \$8.50 other states; or six for \$33.00 NSW; \$36.00 other states, \$A37.00 NZ.

## EA PC BOARDS AND FRONT PANELS

Some readers have problems obtaining PC boards and front panels for projects. Many of our advertisers sell these items and their advertisements should be checked in the first instance. Failing that, below is a list of firms which produce or sell PC boards and front panels.

### NSW

#### Jaycar Electronics

117 York Street,  
Sydney 2000.  
Telephone 264 6688,  
267 1614.

Cnr. Carlingford & Pennant  
Hills Road,  
Carlingford 2118.  
Telephone 872 4444.

115-117 Parramatta Road,  
Concord, 2137.  
Telephone 570 7000.

121 Forest Road,  
Hurstville 2220.  
Telephone 570 7000.

#### Radio Despatch Service,

869 George Street,  
Sydney 2000.  
Telephone 211 0816.

#### RCS Radio Pty Ltd,

651 Forest Road,  
Bexley, NSW 2207.  
Telephone 587 3491.

#### Acetronics Printed Circuit Boards,

112 Robertson Road,  
Bass Hill, 2197.  
Telephone 645 1241

### WA

**Altronics,**  
105 Stirling Street,  
Perth 6000.  
Telephone 328 1599.

#### Jemal Products,

5 Forge Street,  
Kewdale, 6105  
Telephone (09) 451 8726.

### N.Z.

**Marday Services,**  
PO Box 19 189,  
Avondale, Auckland.

#### Mini Tech Manufacturing Co Ltd,

PO Box 9194,  
Newmarket.

**Printed Circuits Limited,**  
PO Box 4248,  
Christchurch.

### VIC.

#### Rod Irving Electronics,

425 High Street,  
Northcote, 3070.  
Telephone 489 8131.

48 A'Beckett Street,  
Melbourne 3001.  
Telephone 347 7917  
347 9251.

#### Kalextronics,

101 Burgundy Street,  
Heidelberg 3084.  
Telephone 743 1011.

Shop 11,  
Regional Shopping Centre,  
Melton 3338.  
Telephone 743 1011.

#### Sunbury Printed Circuits,

Lot 14, Factory 3,  
MacDougal Road,  
Sunbury 3429.  
Telephone 744 2714.

## ADVERTISING INDEX


ADVERTISER	PAGE
Altronics	20, 21, 58, 59, 102, 103, 120, 121
Applied Technology	38, 39
Avtek	52
Agro Data Controllers	134
Ace Radio	135
Birkenhead Electronics	55
Benelec	69
Chapman L. E.	131
Cashmore Enterprises	101
Connect Electronics	107
Dept of Defence	50, 51, 88, 89
Emtronics	18
Eagle Electronics	27
Emona Enterprises	130
Elmeasco	IFC
Fairchild Aust	9
Ferguson Transformers	77
Rod Irving Electronics	28, 29, 42, 64, 65, 113, 126, 127
Jaycar	4, 5, 44, 45, 62, 78, 79, 108, 109
Kitronics	67
Ozi Soft	18
David Reid Electronics	17
Radio Despatch	97
RCS Radio	134
Dick Smith Electronics	10, 11, 12, 13, 34 70, 71, 94, 95, 98, 114, 115
Sheridan Electronics	33
Sanyo	85, IBC
Stotts	111
Scientific Devices	125
Teac	OBG
Union Carbide	125

## AN INTRODUCTION TO DIGITAL ELECTRONICS

Electronic equipment now plays an important role in almost every field of human endeavour. And every day, more and more electronic equipment is "going digital". Even professional engineers and technicians find it hard to keep pace. In order to understand new developments, you need a good grounding in basic digital concepts, and An Introduction to Digital Electronics can give you that grounding. Tens of thousands of people — engineers, technicians, students and hobbyists — have used the previous editions of this book to find out what the digital revolution is all about. The fourth edition has been updated and expanded, to make it of even greater value.

Available from "Electronics Australia", 57 Regent St, Sydney. **PRICE \$4.50** OR by mail order from "Electronics Australia", PO Box 163, Chippendale, 2008. **PRICE \$5.20.**

## SUBSCRIPTION SERVICE

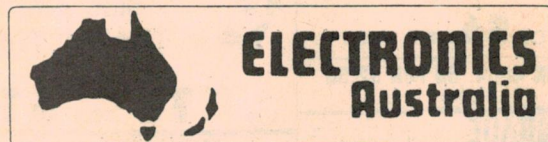

Make sure you receive every copy of the magazine by ordering it from your newsagent or the publisher. For publisher subscriptions post this coupon, with your remittance to Electronics Australia Subscription Dept, John Fairfax & Sons Ltd, GPO Box 506, Sydney 2001. Subscription will start with first available issue.

### Subscription Rates

\$29.00 per year  
within Australia  
\$31.00 per year  
elsewhere

Name .....  
Address .....  
Postcode ..... Enclosed is ..... for ..... years



# The audio giant scores 10 out of 10.

## System 330 Hi-Fi Component System.



**1**

A full 35 watts RMS/channel power, drives the system's stereo units, delivering life-like sound through 3-way speakers.

**2**

Servo-controlled motor with belt drive assures constant, accurate speed. Cue control on turntable gently lowers tonearm into groove, preventing possible damage to the record or the stylus.

**3**

Built-in 5-band graphic equalizer enables you to custom contour the system's sound at 5 critical points along the audio spectrum by as much as 10dB.

**4**

A/B speaker switching enables you to connect two sets of speakers to your system and listen to them separately or together.

**5**

The tuner with its 3-segment LED signal strength indicator lets you know when you're receiving a weak or distant station.

**6**

Two 5-segment LED VU meters on the cassette deck provide precise, easy-to-read record levels and help to prevent distortion.

**7**

Dolby\* noise reduction circuit minimises distracting tape hiss and allows you to record and playback crisp, clean sound.

**8**

3-way, 3 speaker systems each containing 25cm woofer, 10cm midrange and a 2.5cm dome tweeter.

**9**

Audio component rack with attractive wood-grain finish includes record storage facility. Castors for easy mobility, glass door and hinged glass turntable dust cover.

**10**

The tenth feature is the price and Sanyo has taken care of that too, but that's life.

\*Dolby is a registered trademark of Dolby Laboratories.

 **SANYO**  
*That's Life!*



# WHY DID WE CALL IT THE Z SERIES?

## Because nothing can follow it.

The TEAC Z Series. Three cassette decks that are all the cassette deck anyone will ever need. Designed and built to provide absolutely the finest in cassette reproduction quality. In precision of performance. And in operational versatility. The transport and electronics are the pinnacle of TEAC technology, drawing on our know-how in producing superior open reel decks and professional equipment. Operational sophistication is unmatched. Any function worth having on a cassette deck is on the Z-7000. And the Z-6000 and Z-5000 are almost as impressive. In fact, you can tell just by looking that these decks are in a class by themselves. Bigger. Heavier. Without extraneous frills. Built for solid, stable, permanent excellence. The Z Series. Cassette deck performance from A to Z.

- Direct-drive capstan motor
- 3-head system
- dbx and Dolby B-C noise reduction
- Manual recording bias, level and EQ calibration system
- Heavy duty diecast chassis
- Electroload head loading system

- 3 direct-drive DC motors
- Direct-coupled playback EQ amplifier
- 3-head system
- dbx and Dolby B-C noise reduction
- dbx disc position
- Manual recording bias, level and EQ calibration system

- 3 direct-drive DC motors
- 3-head system
- dbx and Dolby B-C noise reduction
- dbx disc position
- Automatic recording bias, level and EQ calibration system
- Tape calibration memory
- Block Repeat

- Direct-coupled playback EQ amplifier
- Real-time tape counter
- Memory repeat/play/stop
- CPS (Computomatic Program Search)
- Rec mute with auto spacer
- Standard remote control unit

- Dual-capstan closed-loop transport system
- Real time tape counter
- Automatic tape select
- 30-segment FL peak level meters
- Memory repeat/play/stop
- CPS (Computomatic Program Search)

- Dual-capstan closed-loop transport system
- Real-time tape counter
- Automatic tape select
- Search To Cue, Search To Zero, Search To Record
- Spot Erase System
- CPS (Computomatic Program Search)



**Z-5000**



**Z-6000**



**Z-7000**

# TEAC®

Where Art and Technology Meet

TEAC Australia Pty., Ltd.: 115 Whiteman Street South Melbourne, Victoria 3205 Phone: 699-6000